


Hearth Pad Selection Guide

FOR HARMAN STOVES

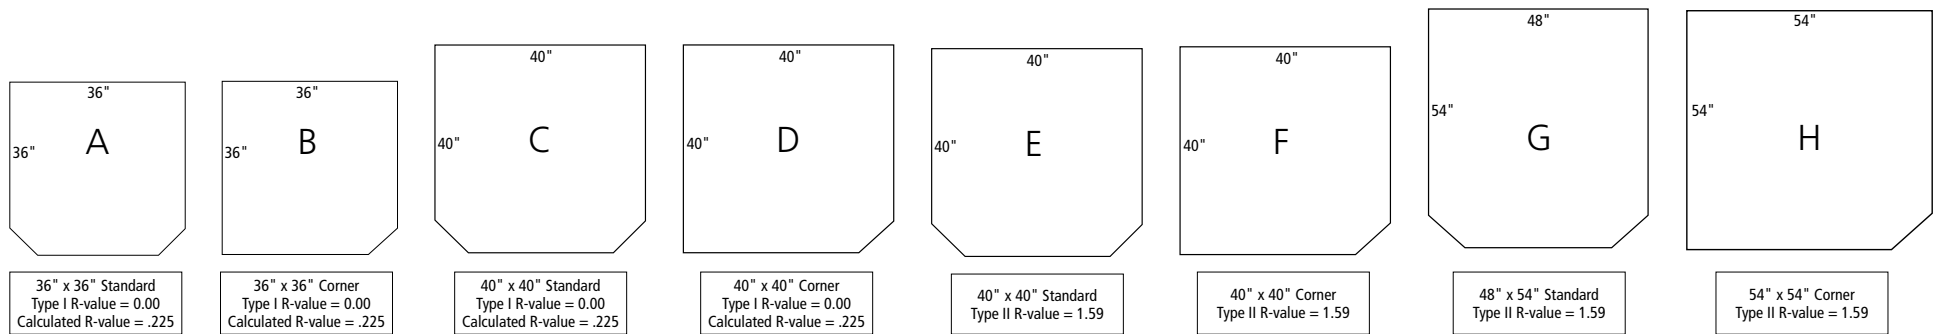

Stove Model	USA Recommendation	Stove Depth	Stove Width	Minimum Hearth Pad Depth	Minimum Hearth Pad Width	Minimum K-Value	Minimum K-Thickness	Minimum R-Value	Minimum R-Thickness	Type
Pellet Stoves										
Accentra	A, B, C, D, E, F, G, H	23-1/4"	24-5/8"	24-1/16"	28-5/8"	None	None	None	None	I or II
XXV	A, B, C, D, E, F, G, H	26-1/2"	29"	32"	32"	None	None	None	None	I or II
P38+	E, F, G, H	28-1/2"	22"	33"	32-1/2"	0.84	3/8"	0.45	3/8"	II
P43	E, F, G, H	28-1/2"	22"	33"	32-1/2"	0.84	3/8"	0.45	3/8"	II
PC45	E, F, G, H	29-1/2"	23-1/2"	34"	25"	0.84	3/8"	0.45	3/8"	II
P61A	E, F, G, H	29-1/2"	23-1/2"	34"	25"	0.84	3/8"	0.45	3/8"	II
P68	A, B, C, D, E, F, G, H	29-1/2"	23-1/2"	34"	25"	None	None	None	None	I or II
Advance	A, B, C, D, E, F, G, H	20-1/2"	26-5/8"	27"	31"	None	None	None	None	I or II
Wood Stoves										
Oakleaf	G, H	27-5/8"	26-1/4"	48"	32-1/2"	0.84	3/8"	0.45	3/8"	II
Oakwood	G, H	28"	30-5/16"	48"	34-1/2"	0.84	3/4"	0.89	3/4"	II
TL 300	G, H	29-7/16"	27-1/16"	44"	51"	None	None	None	None	I or II
TL 2.0	G, H	26"	25.8"	48"	48"	0.84	3/8"	0.45	3/8"	II
TL 2.6	G, H	28.6"	25.8"	48"	50"	0.84	3/8"	0.45	3/8"	II
Coal Stoves										
DVC-500	G, H	32-7/8"	26-1/8"	47"	36"	None	None	None	None	I or II
Mark I	E, F, G, H	18"	20"	39"	28"	0.84	3/8"	0.45	3/8"	II
Mark II	G, H	19"	25"	42"	34"	0.84	3/8"	0.45	3/8"	II
Mark III	G, H	24"	25"	42"	34"	0.84	3/8"	0.45	3/8"	II
SF-250	G, H	34"	20-1/2"	54"	29"	0.84	3/8"	0.45	3/8"	II
Super Mag Stoker	G, H	35-7/16"	26-3/4"	49-1/2"	42-3/4"	None	None	None	None	I or II
TLC200	E, F, G, H	25-1/8"	35-13/16"	36"	36"	0.84	3/8"	0.45	3/8"	II