


FIREBRICK SETS FOR THE FOLLOWING UNITS

DVC500 COAL STOKER
ELITE COAL INSERT
INV-RS PELLET STOVE / INVINCIBLE PELLET INSERT
SUPER MAGNUM / MAGNUM COAL STOKER
MARK I COAL STOVE
MARK II COAL STOVE
MARK III COAL STOVE
SF250 COAL STOVE
SF160 DUAL FUEL BOILER
SF260 DUAL FUEL BOILER
SF360 DUAL FUEL BOILER
SF1500 DUAL FUEL FURNACE
SF2500 DUAL FUEL FURNACE
SF2600 TRIPLE FUEL FURNACE
SF3500 DUAL FUEL FURNACE
TL2.0 FREESTANDING WOOD STOVE
TL2.6 FREESTANDING WOOD STOVE
TL200 EXCEPTION FREESTANDING WOOD STOVE
F200 EXCEPTION WOOD INSERT
VF3000 COAL STOKER BOILER

FOR USE ON HARMAN DVC 500 COAL STOKER

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK

Pos	Qty	Description
10	3	CUT BRICK REAR

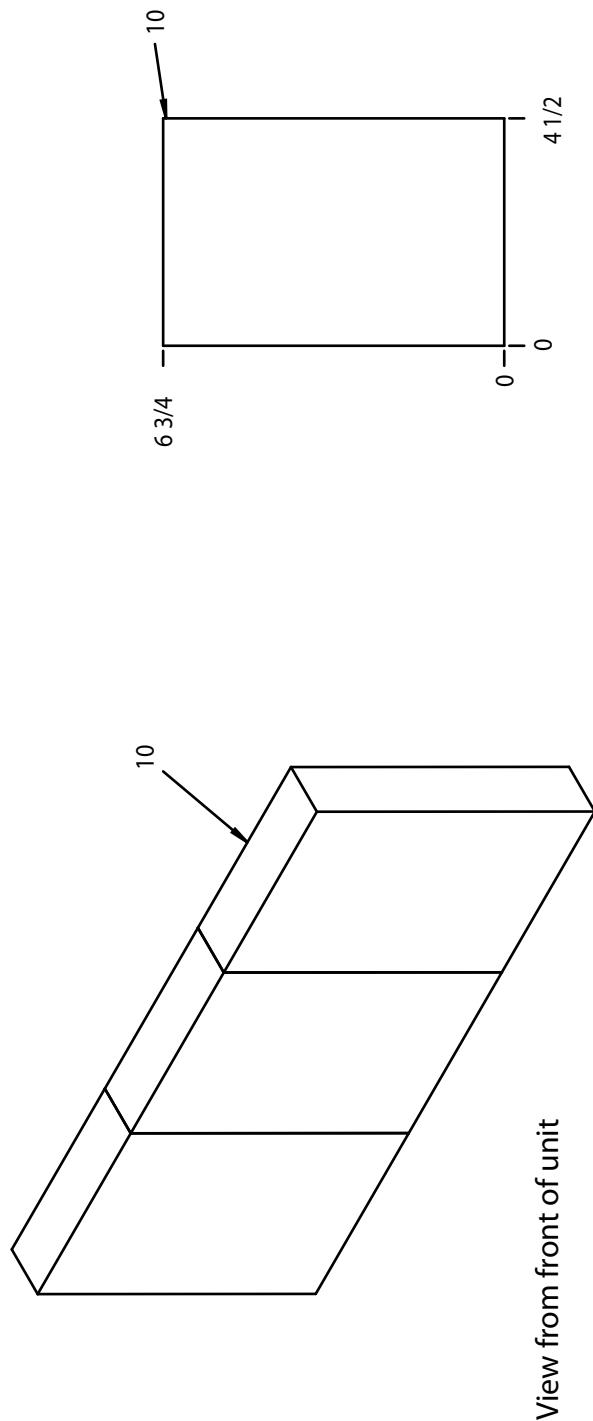


FOR USE ON HARMAN ELITE COAL INSERT

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"



Pos	Qty	Description
10	13	STANDARD FIREBRICK
20	2	CUT FRONT BRICK CORNER

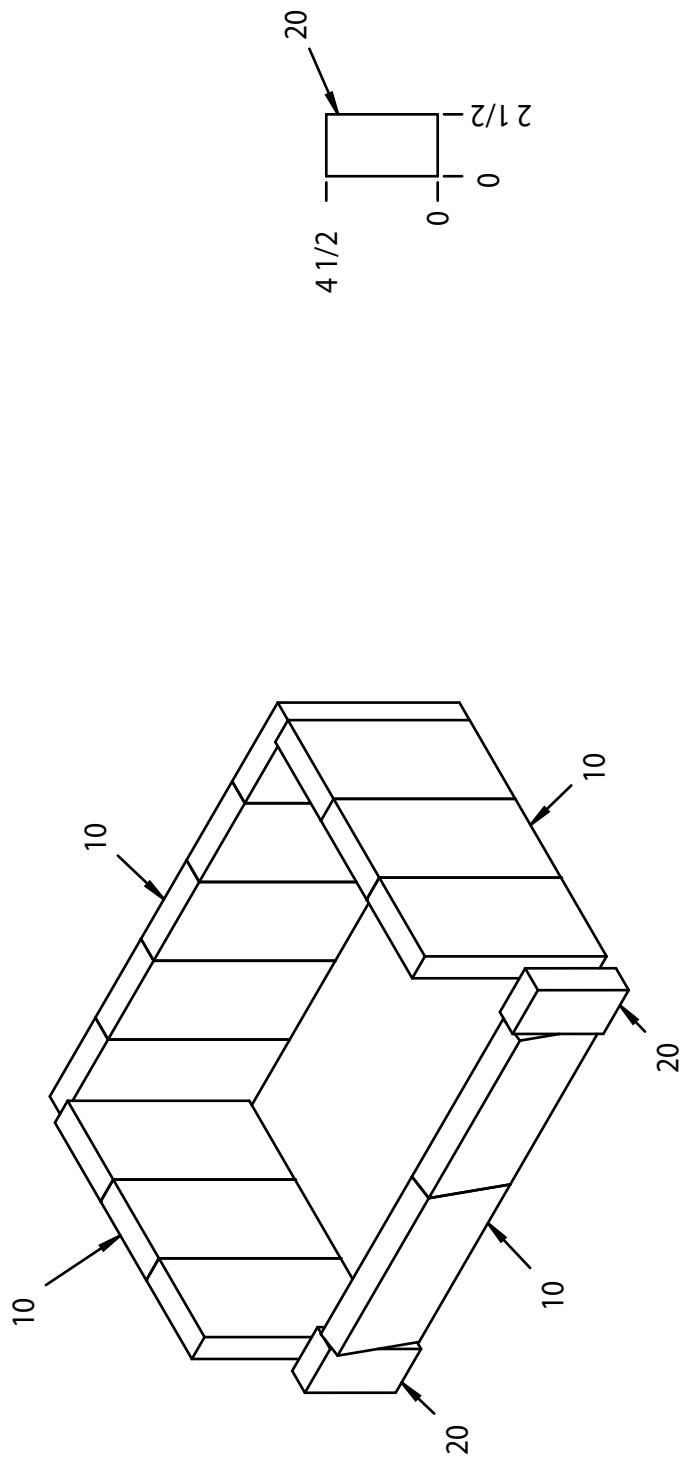


View from front of unit

FOR USE ON HARMAN INVINCIBLE RS / INVINCIBLE INSERT PELLET STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK

	Pos	Qty	Description
10	2		CUT BRICK FRONT

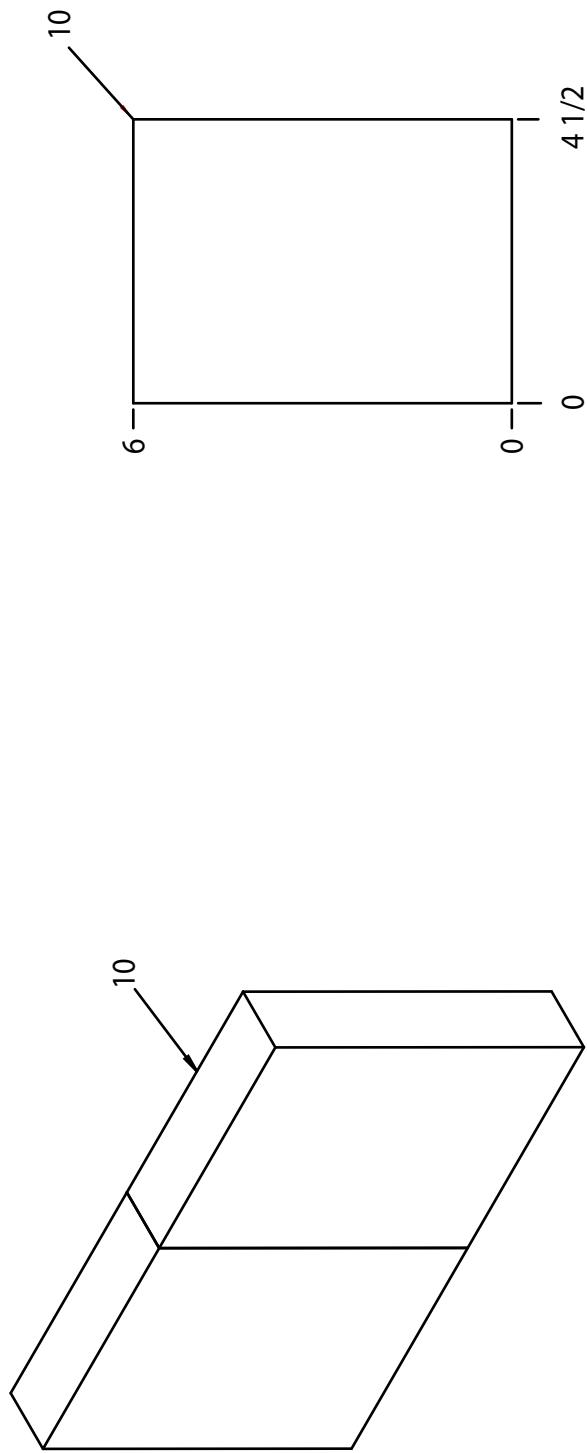


View from front of unit


FOR USE ON HARMAN SUPER MAG STOKER / MAGNUM STOKER

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	2	ANGLE CUT BRICK
20	1	STANDARD FIREBRICK

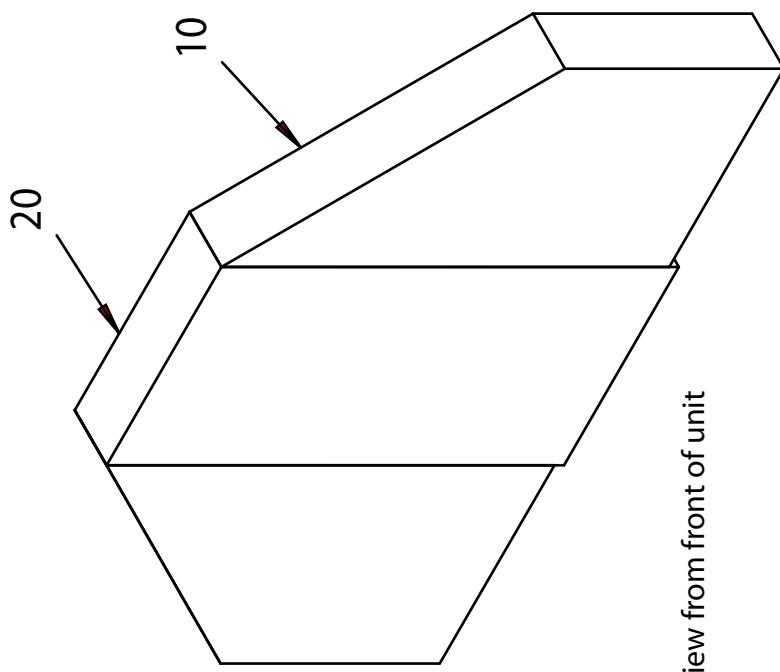


View from front of unit

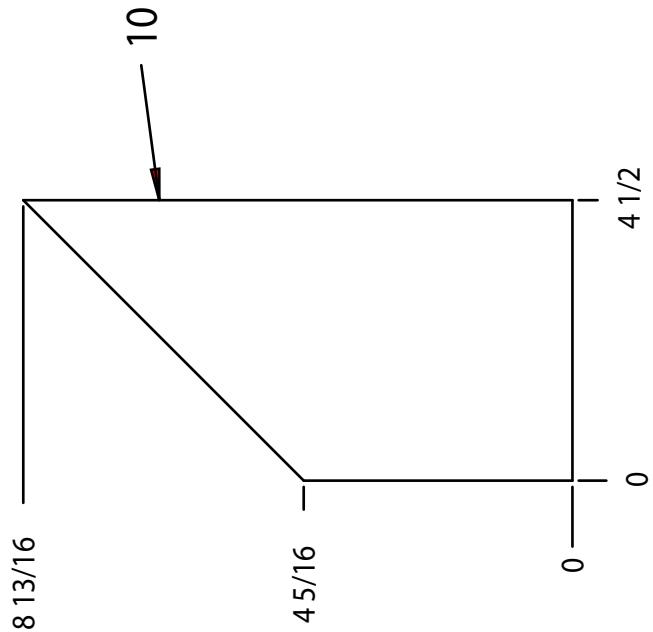

FOR USE ON HARMAN MARK I COAL STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	2	STANDARD FIREBRICK
20	2	ANGLE CUT BRICK SIDE
30	3	CUT BRICK REAR
40	3	CUT BRICK FRONT
50	1	CUT BRICK REAR CORNER
60	1	CUT BRICK FRONT CORNER

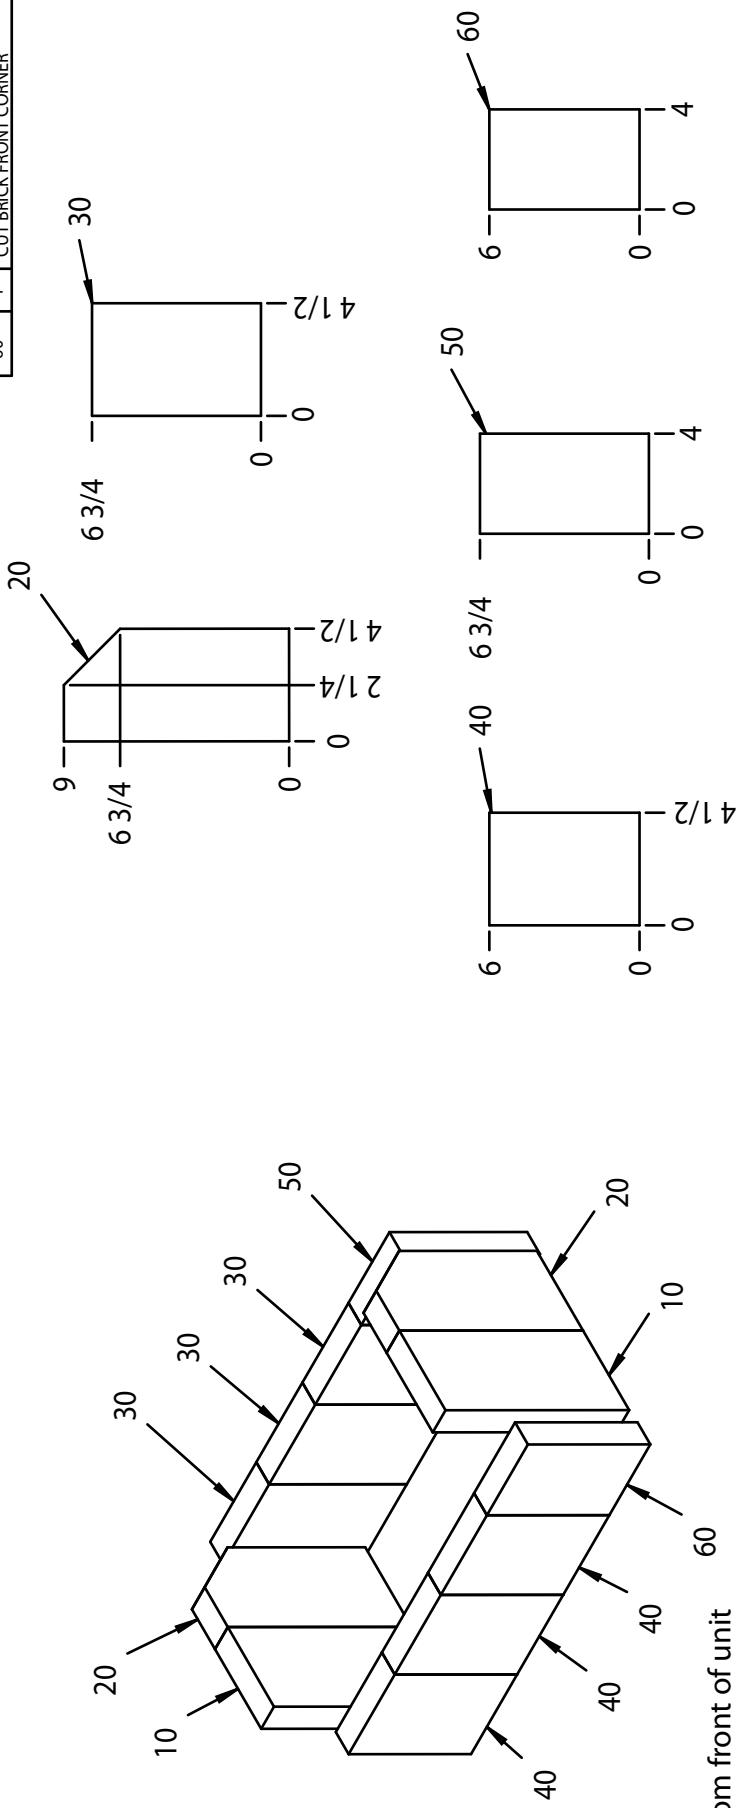


View from front of unit


FOR USE ON HARMAN MARK II COAL STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	11	STANDARD FIREBRICK
20	1	CUT BRICK FRONT
30	2	CUT BRICK FRONT SIDE CORNER

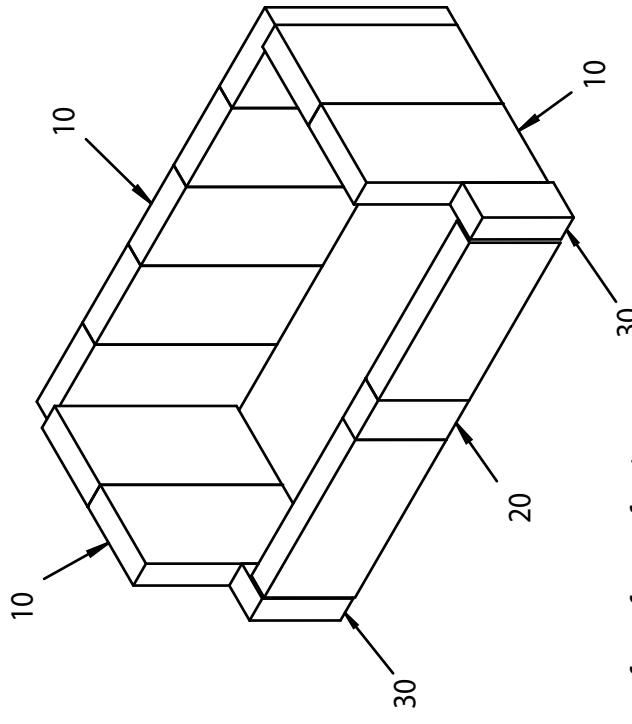


View from front of unit

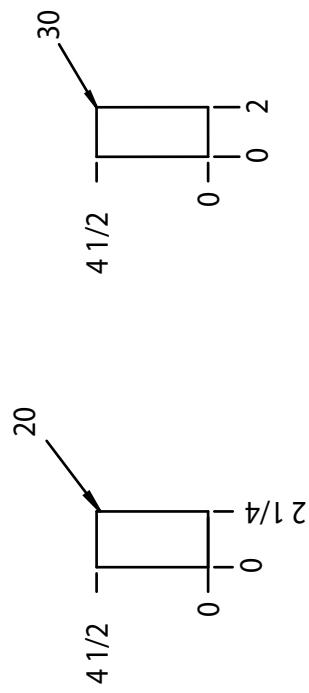

FOR USE ON HARMAN MARK III COAL STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	13	STANDARD FIREBRICK
20	1	CUT BRICK FRONT
30	2	CUT BRICK FRONT SIDE CORNER

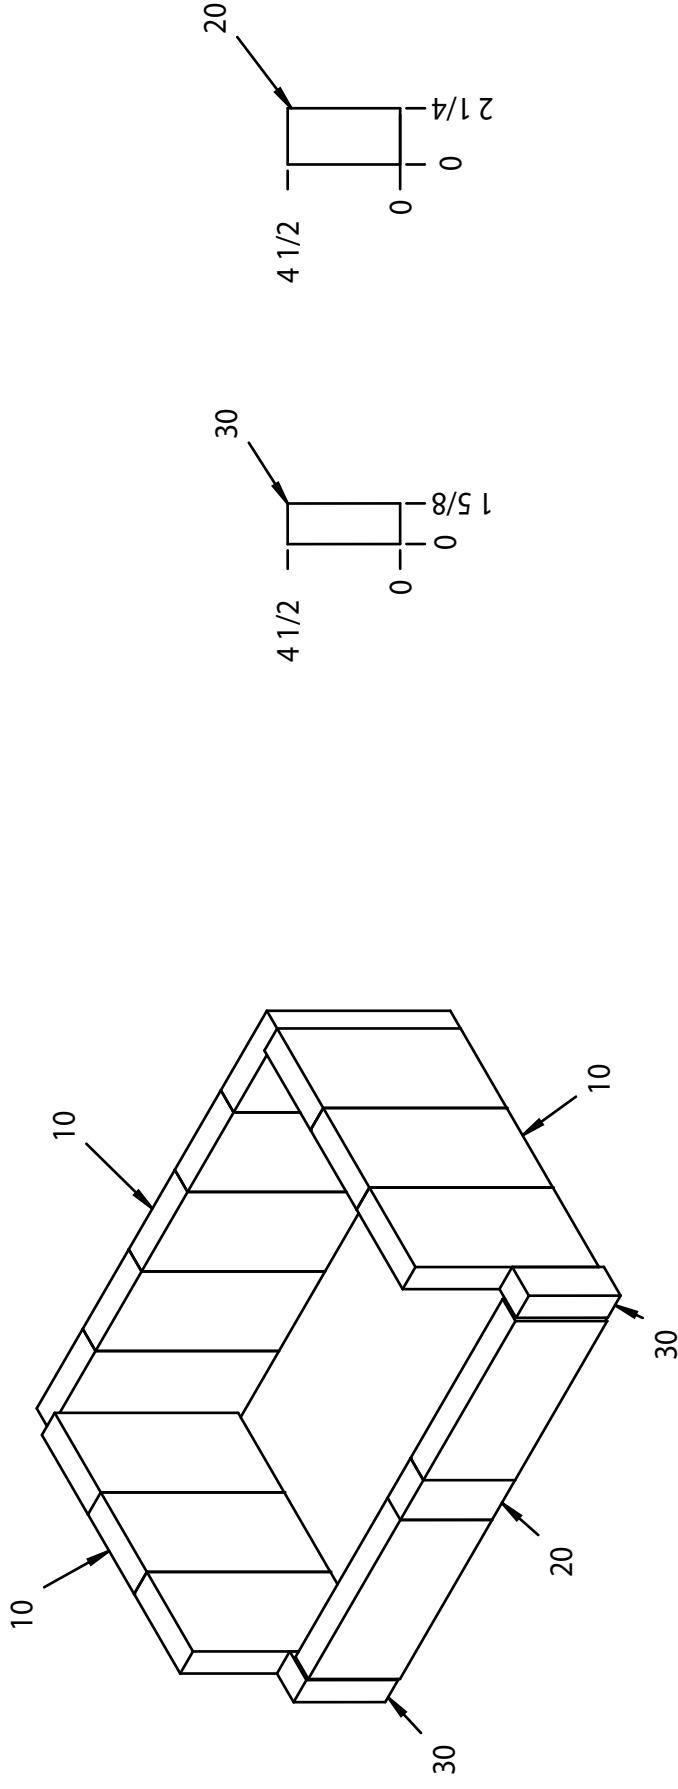


View from front of unit


FOR USE ON HARMAN SF250 COAL STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	13	STANDARD FIREBRICK
20	1	SF250 CUT BRICK 9" X 4" X 1-1/4"

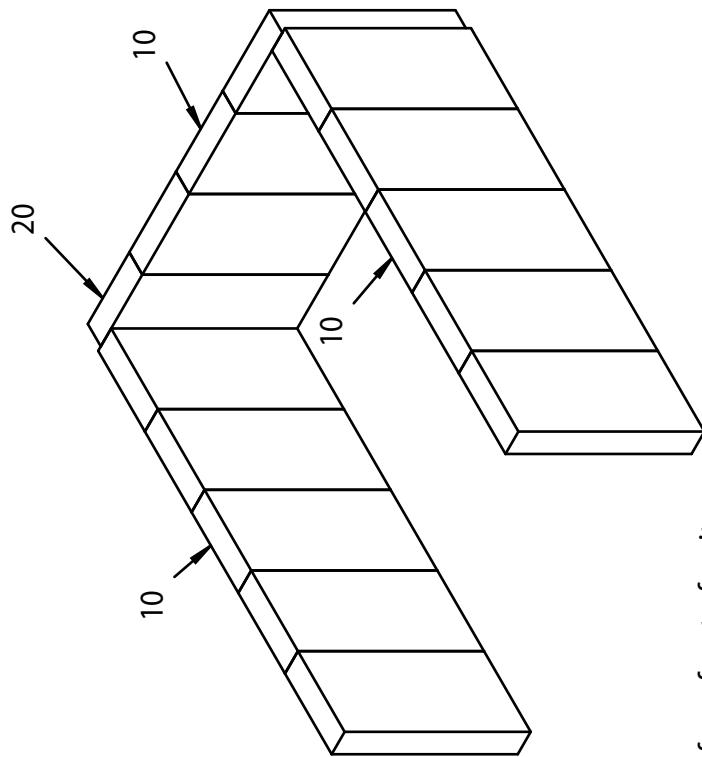

View from front of unit

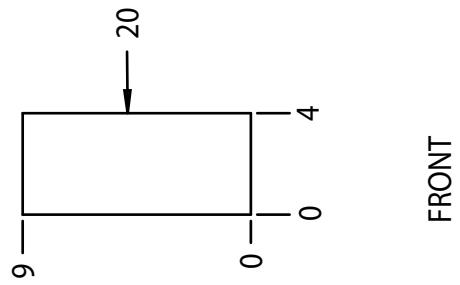


FRONT

FOR USE ON HARMAN SF160 BOILER

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"


Pos	Qty	Description
10	6	STANDARD FIREBRICK
20	2	CUT BRICK REAR
30	2	CUT SIDE BRICK

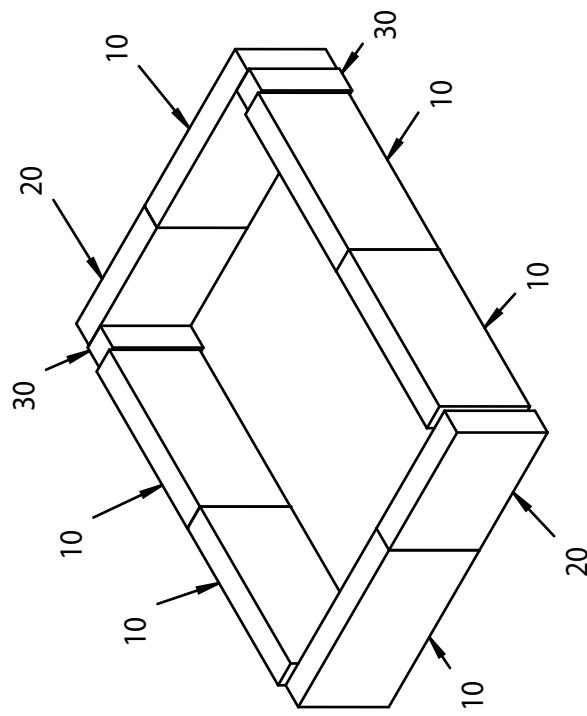

FOR USE ON HARMAN SF260 BOILER

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"


Pos	Qty	Description
10	2	CUT BRICK FRONT-REAR
20	2	CUT SIDE BRICK FRONT
30	6	STANDARD FIREBRICK

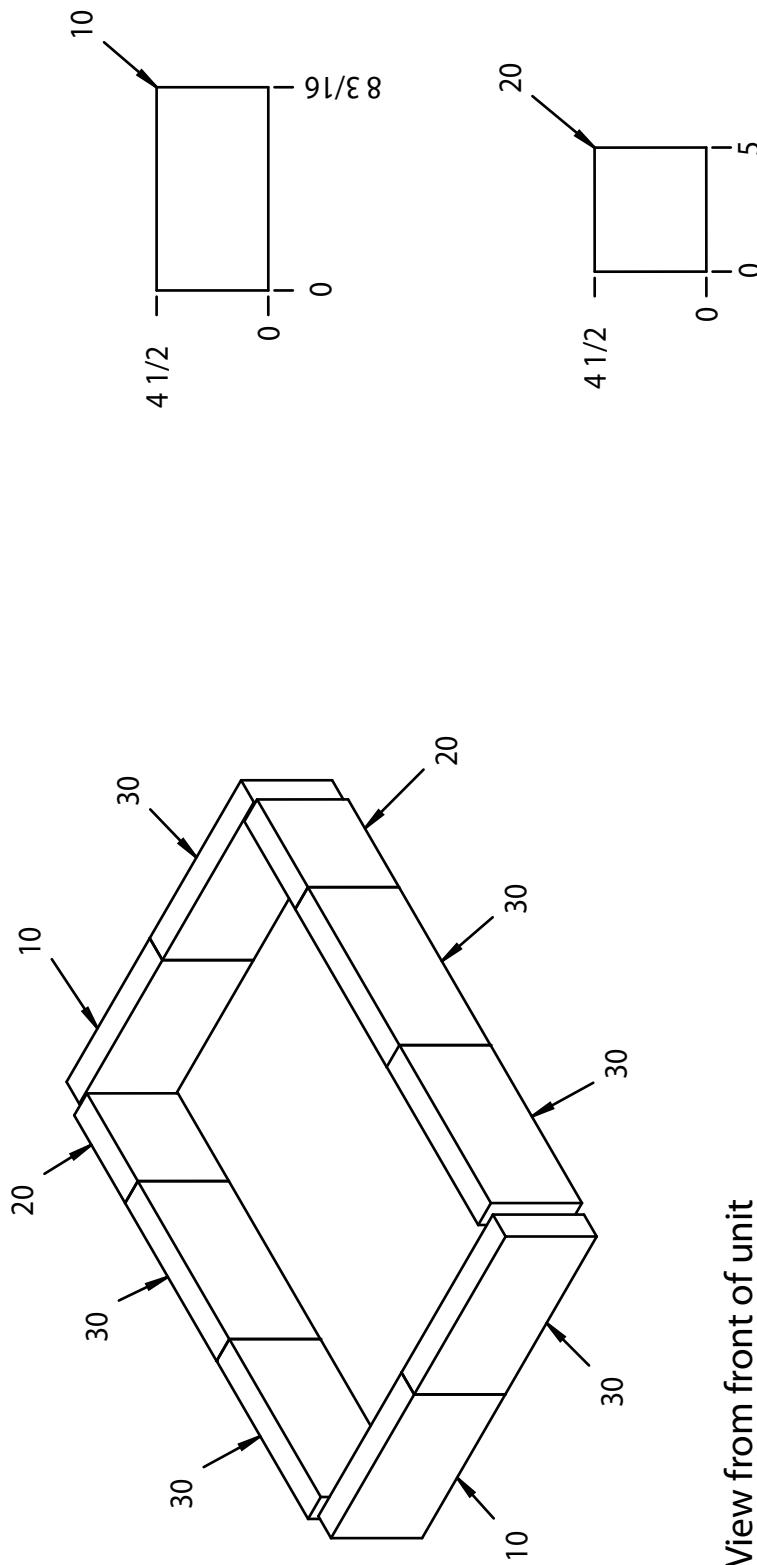

FOR USE ON HARMAN SF360 BOILER

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	18	STANDARD FIREBRICK
20	2	CUT BRICK

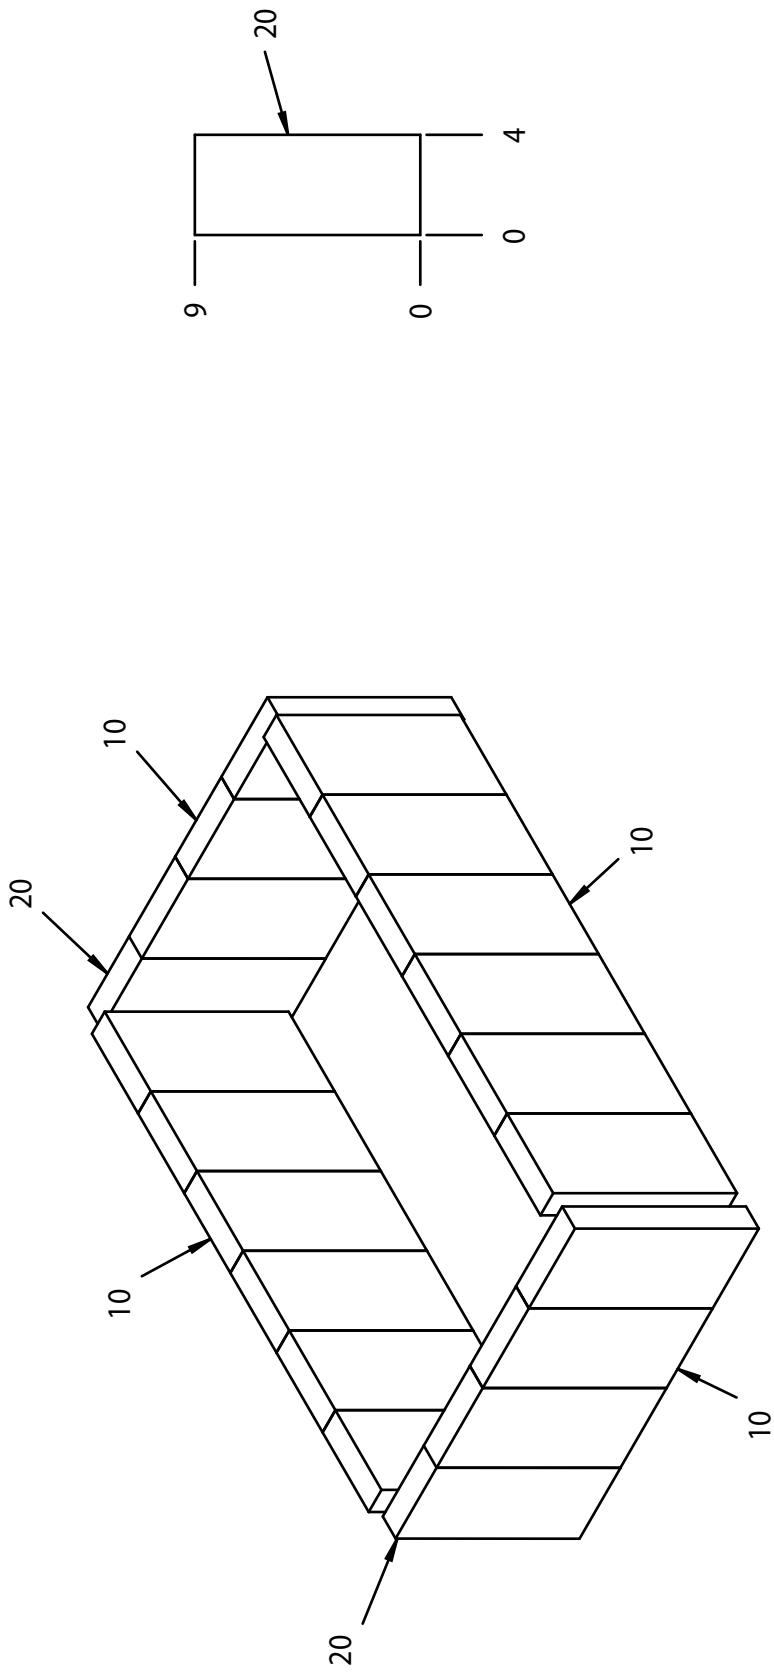


View from front of unit

FOR USE ON HARMAN SF1500 HOT AIR FURNACE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"


Pos	Qty	Description
10	8	STANDARD FIREBRICK
20	2	CUT BRICK FRONT
30	2	ANGLE CUT BRICK REAR
40	2	ANGLE CUT BRICK FRONT
50	4	CUT BRICK SIDE

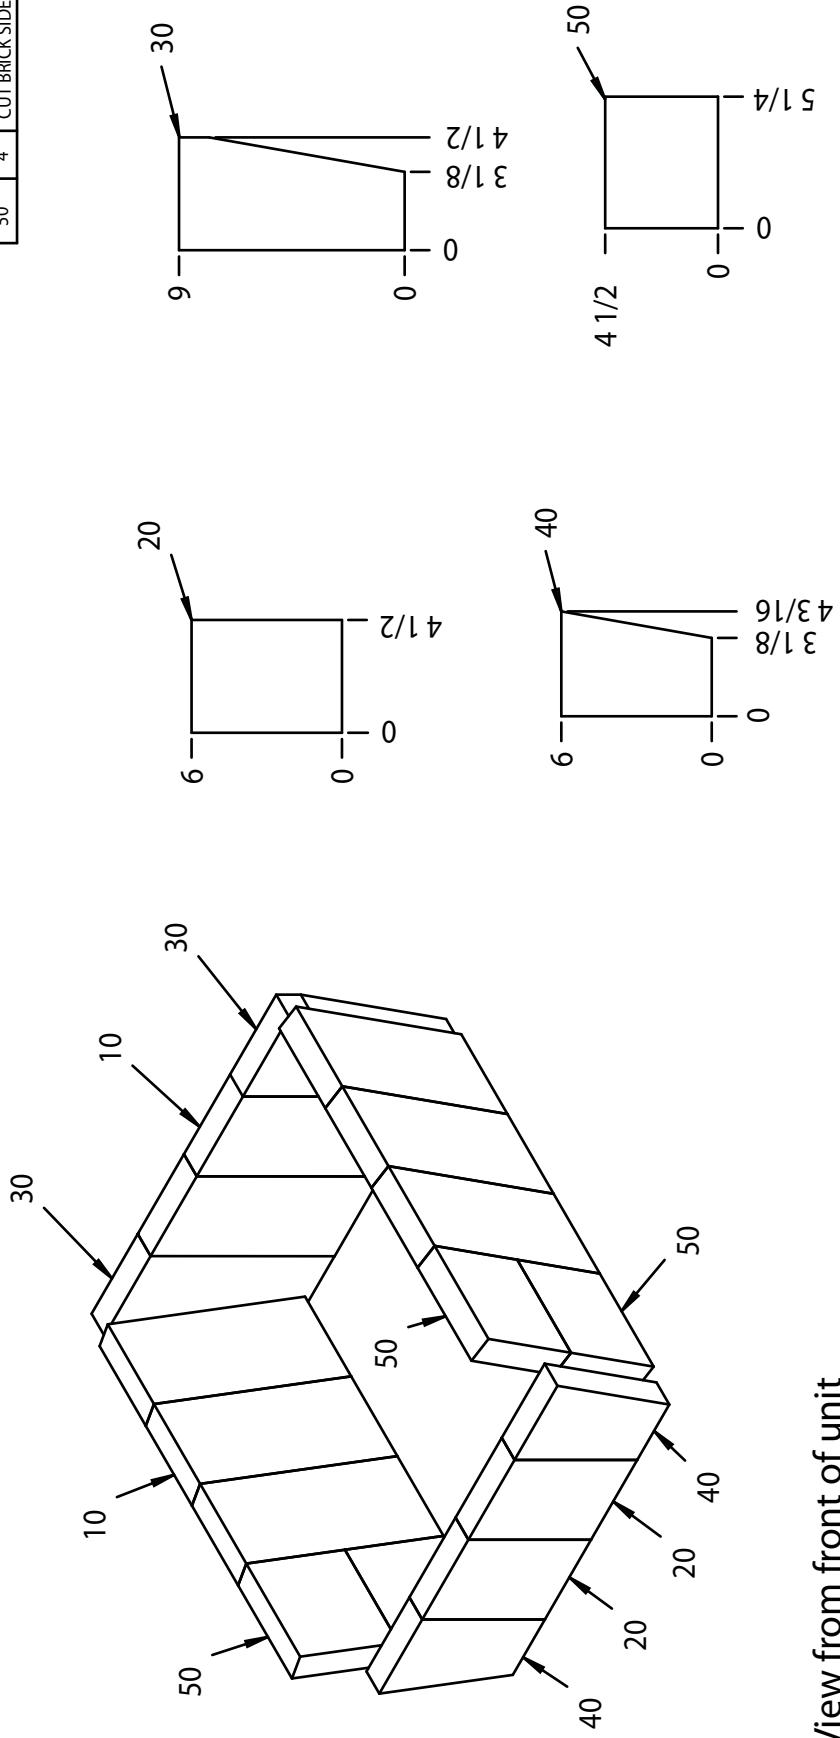


FOR USE ON HARMAN SF2500 HOT AIR FURNACE

**MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"**

	Pos	Qty	Description
10	2	ANGLE CUT REAR BRICK	
20	4	CUT SIDE BRICK FRONT	
30	2	ANGLE CUT BRICK FRONT	
40	2	CUT BRICK FRONT	
50	10	STANDARD FIREBRICK	

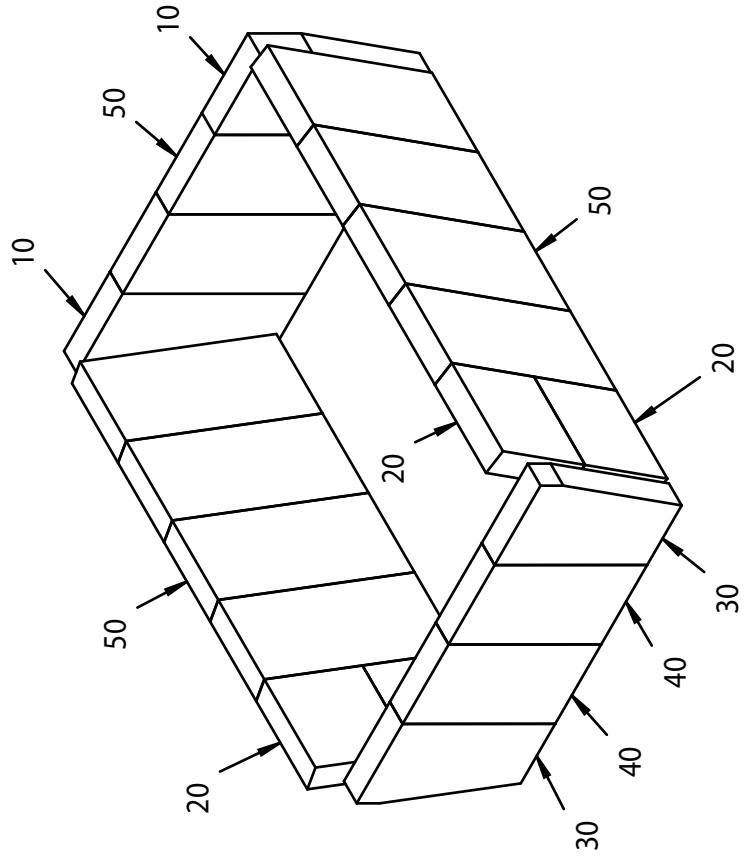


View from front of unit

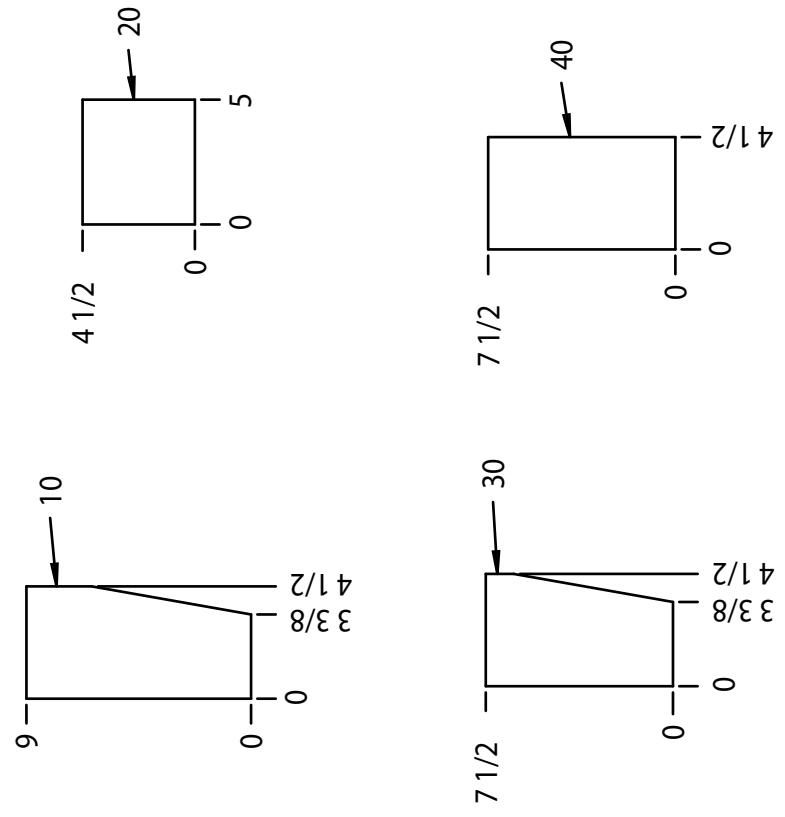

FOR USE ON HARMAN SF2600 HOT AIR FURNACE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	2	ANGLE CUT REAR BRICK
20	2	ANGLE CUT FRONT BRICK
30	2	CUT FRONT BRICK
40	4	CUT SIDE BRICK FRONT
50	10	STANDARD FIREBRICK

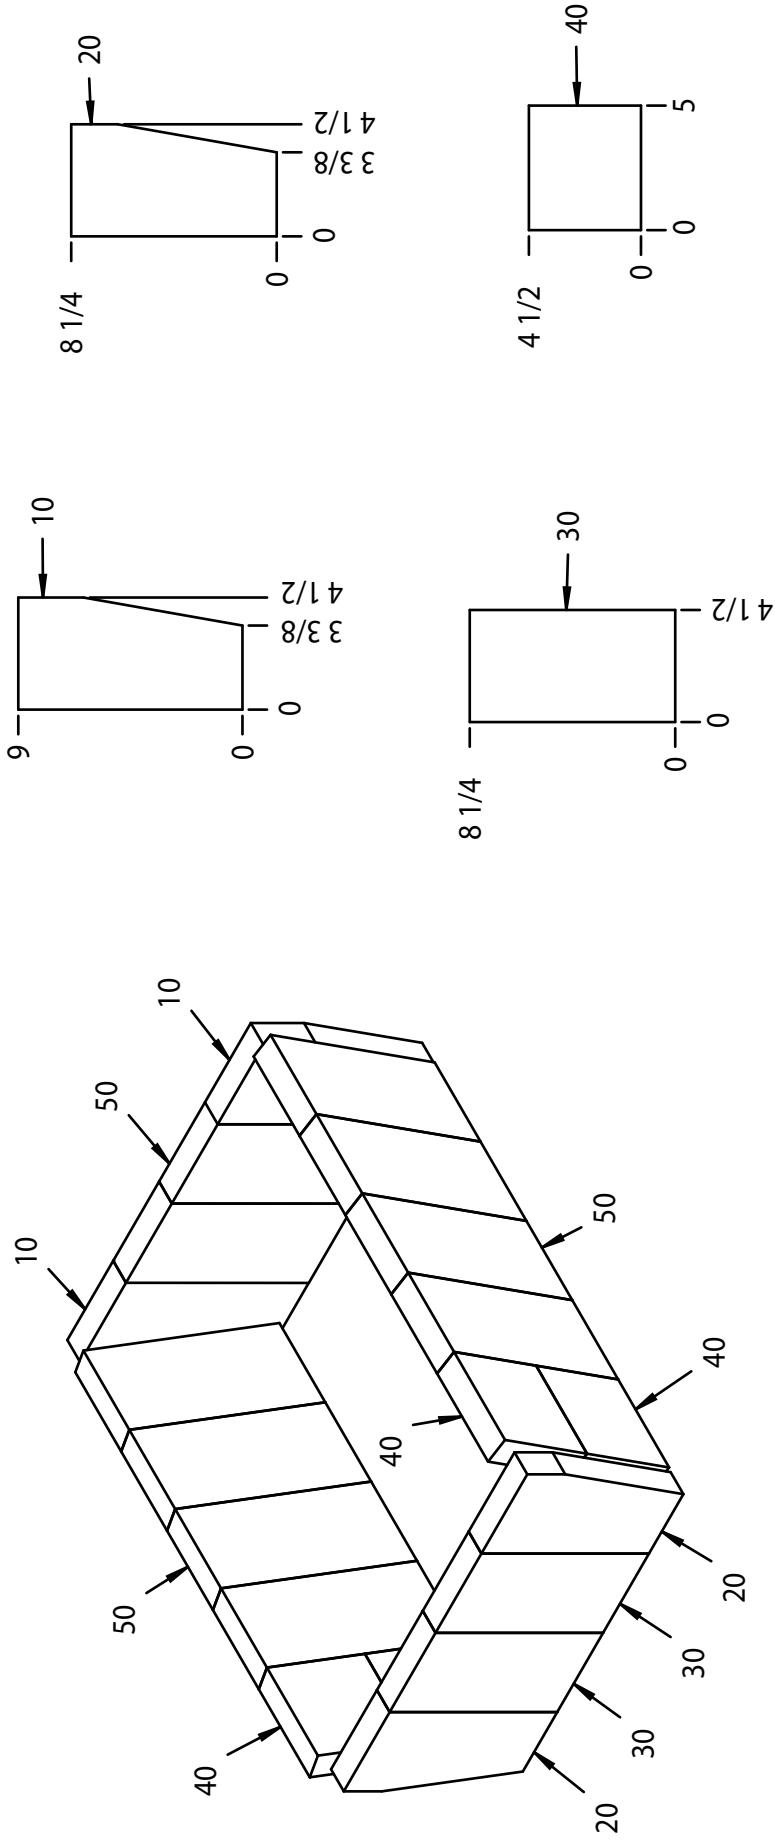


View from front of unit

FOR USE ON HARMAN SF3500 HOT AIR FURNACE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	16	STANDARD FIREBRICK
20	4	ANGLE CUT BRICK FRONT-REAR
30	2	CUT BRICK FRONT-REAR

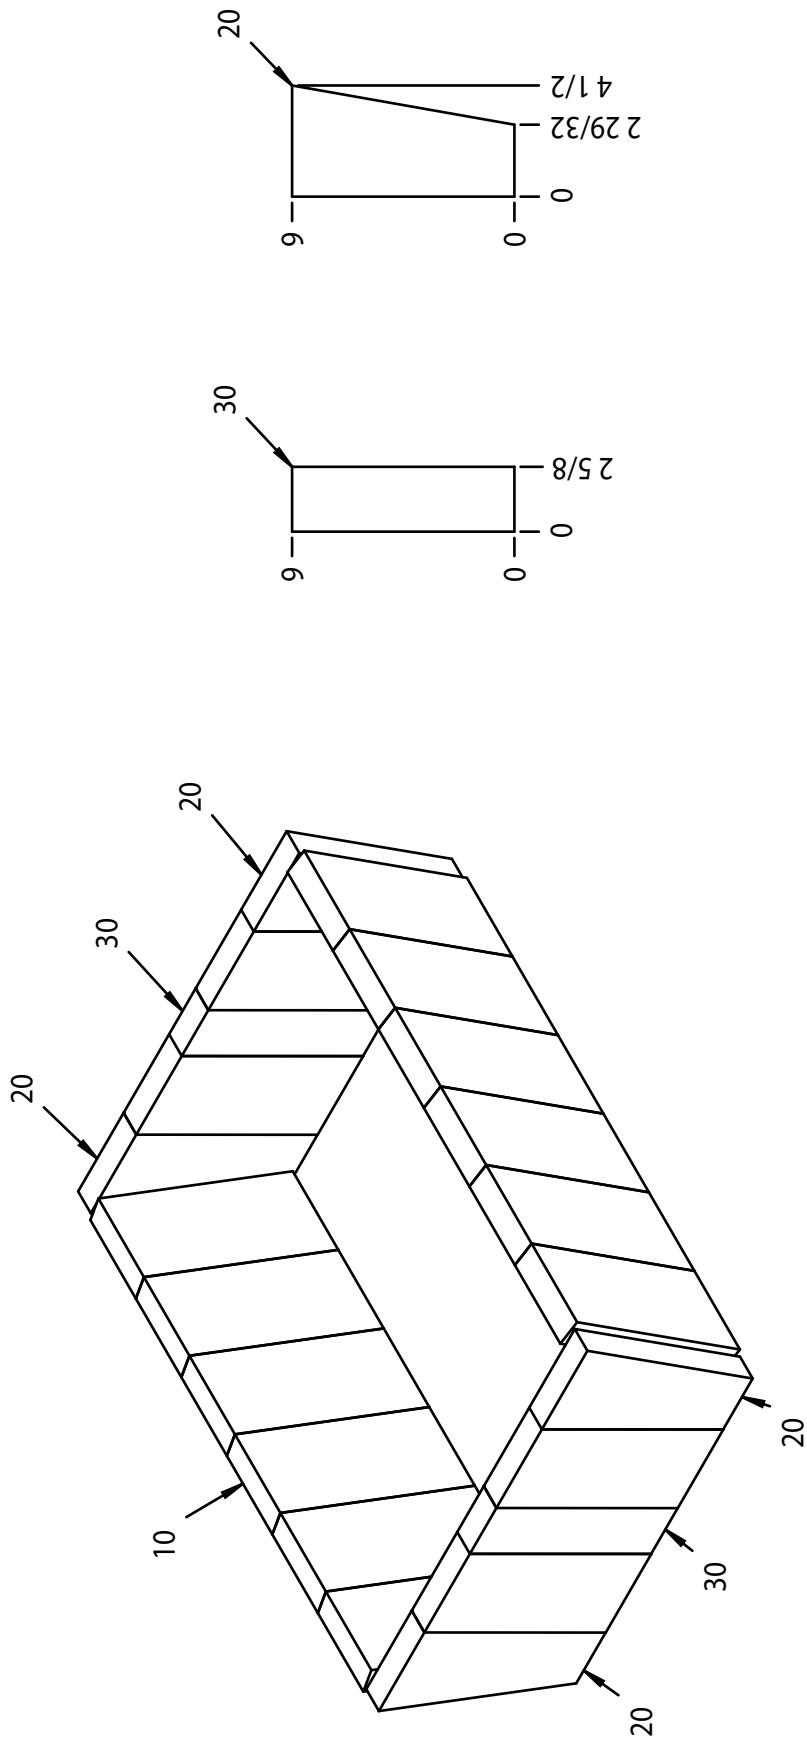


View from front of unit


FOR USE ON HARMAN TL2.0 WOOD STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK

Pos	Qty	Description
10	4	SIDE BRICK
20	2	REAR BRICK

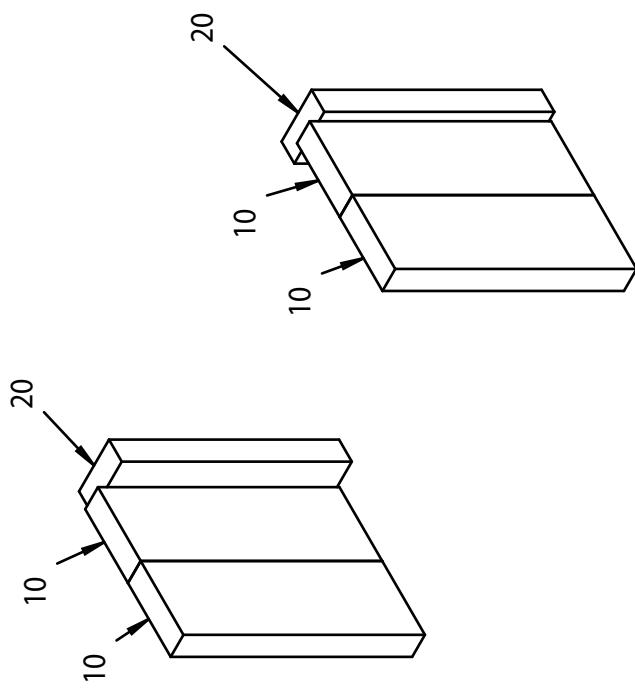


View from front of unit

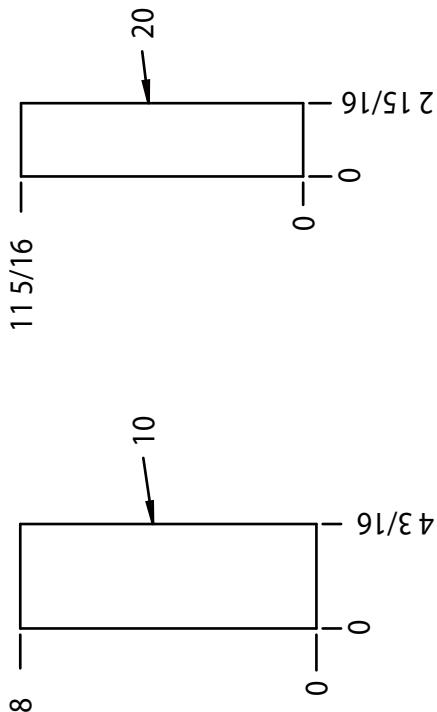


FOR USE ON HARMAN TL2.6 WOOD STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 6" X 12" X 1 1/4"

Pos	Qty	Description
10	2	REAR BRICK
20	2	SIDE BRICK
30	2	STANDARD FIREBRICK

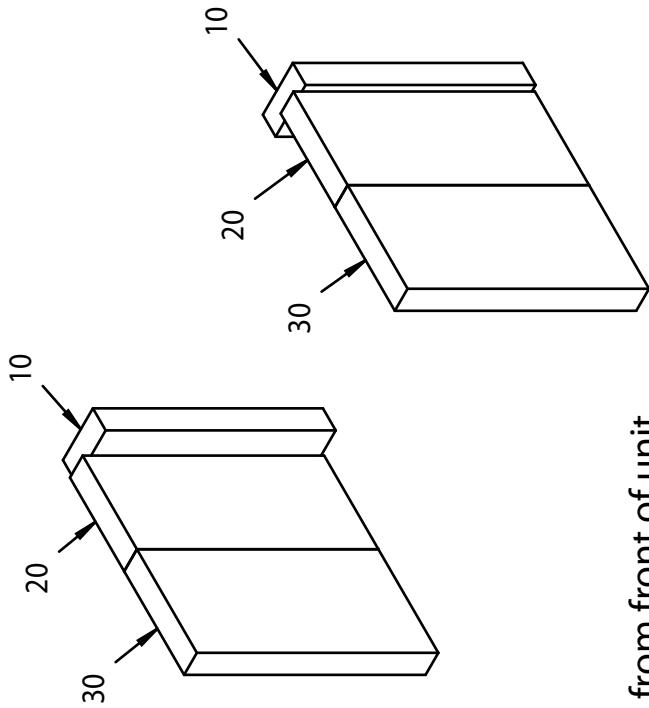



View from front of unit

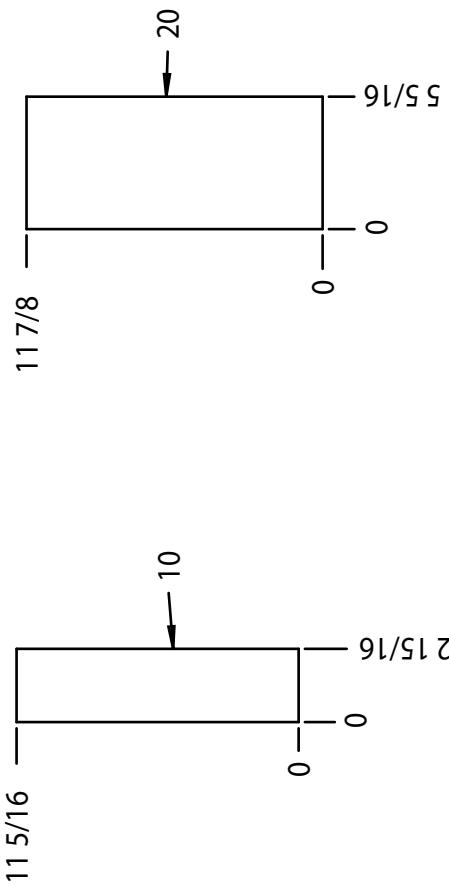

FOR USE ON TL200 EXCEPTION WOOD STOVE

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	4	STANDARD FIREBRICK
20	2	CUT BRICK REAR
30	2	CUT SIDE BRICK

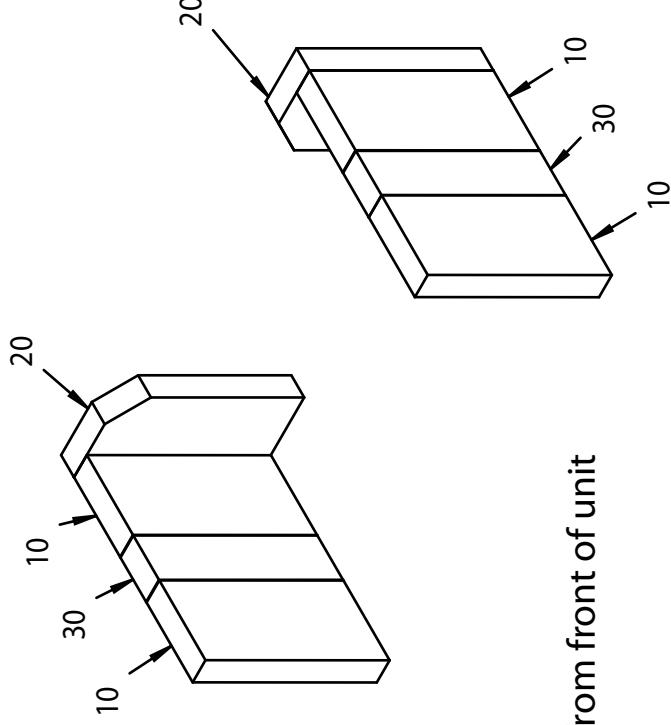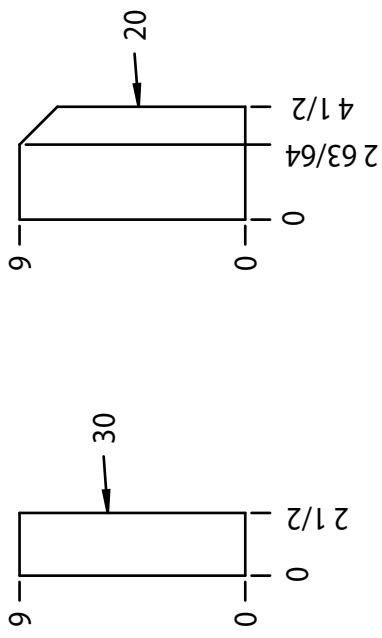


View from front of unit


FOR USE ON HARMAN F200 EXCEPTION WOOD INSERT

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK
STANDARD FIREBRICK DIMENSIONS 4 1/2" X 9" X 1 1/4"

Pos	Qty	Description
10	7	STANDARD FIREBRICK
20	2	CUT BRICK REAR
30	2	CUT SIDE BRICK

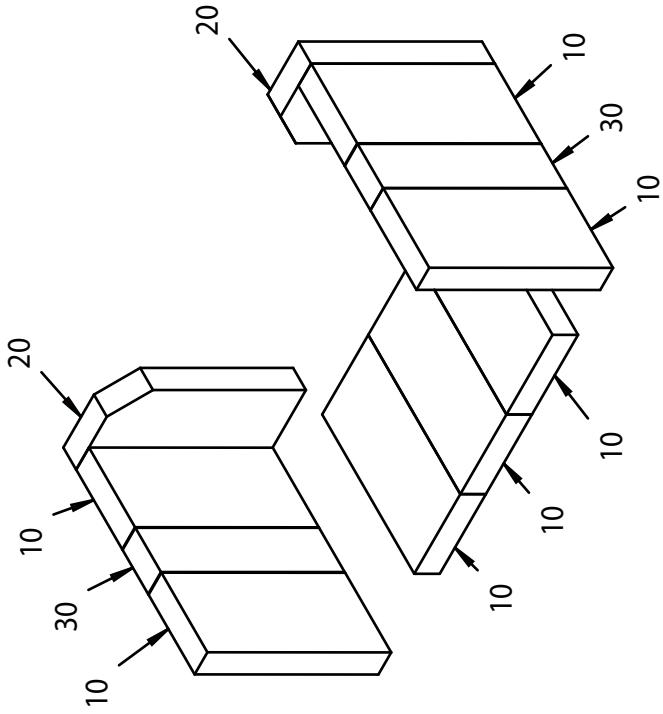


View from front of unit

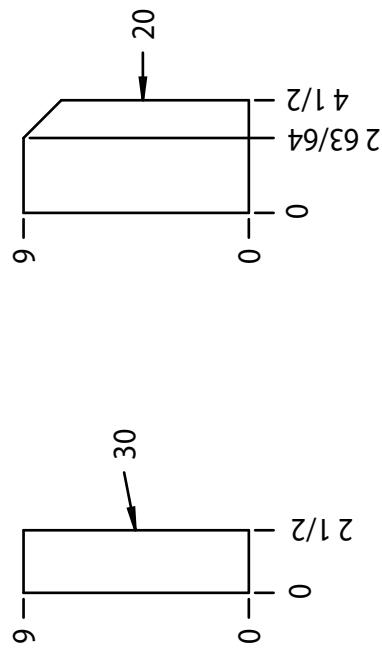

FOR USE ON HARMAN VF3000 STOKER BOILER

MATERIAL IS DRY PRESS FIREBRICK 1 1/4" THICK

Pos	Qty	Description
10	2	CUT BRICK FRONT

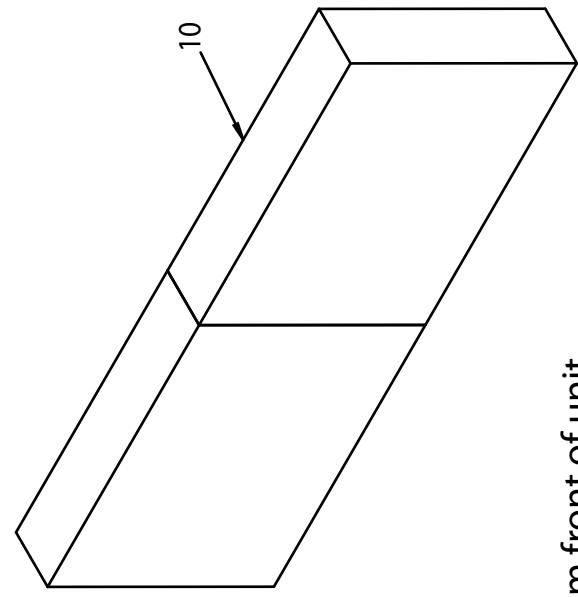

View from front of unit

