

&
LUX

DIRECT VENT GAS FIREPLACES



HEAT & GLO



MODERN ART
ON FIRE



LUX

The LUX makes a statement in a clean and distinct way. It's modern art. On fire.

BIG IMPACT

Large viewing areas command attention. Subtle trim adds a minimalist touch. Powerful heating performance fortifies the effect.


HIGH STYLE

Colorful flames rise through sculpted stainless steel. A reflective black glass interior multiplies the fire and radiates the flames. And exclusive finishing options help you create a custom, stunning look.



FRONT OPTIONS

Choose a front design to complement your media and accent your décor.

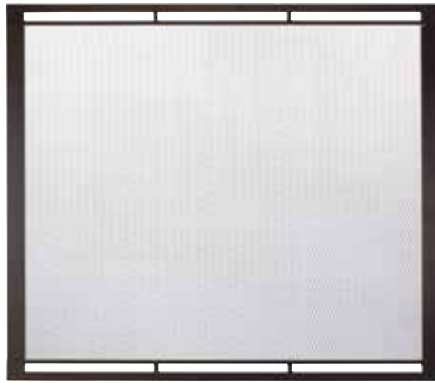

FIRESCREEN



MODERN¹

FINISHES



LUX MEDIA OPTIONS



CRYSTAL GLASS
(STANDARD)



BLACK GLASS



COBALT GLASS



AMBER GLASS



CERAMIC FIBER
STONES

REMOTE CONTROL



Operate the LUX with a simple, single-mode wall control. Comes standard with the LUX.

Cover: LUX 50
Left: LUX 42 shown with modern front in fog gray and crystal glass
Above: LUX 42 shown with firescreen in black and ceramic fiber stones

1 Modern front available in black or gray only
2 Fog gray available on modern front only

LUX TECHNOLOGIES



INTELLIFIRE™ IGNITION SYSTEM

The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs.



DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.




HEAT ZONE TECHNOLOGY

Draw heat from the fireplace into another room of the home, up to 20 feet away. When a heat zone kit is run continuously, it will redirect up to 25% of the fireplace's heat to another area, thus reducing wall temperatures above the fireplace. Two heat zones run continuously will redirect up to 50% of the fireplace's heat.

LUX SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HOUR INPUT
	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING		
LUX36	61 [1549]	59-1/2 [1511]	59-1/4 [1505]	59-1/2 [1511]	57-5/8 [1464]	56 [1422]	24 [610]	24 [610]	35-7/8 x 31-1/16 [911 x 789]	38,000
LUX42	67 [1702]	65-9/16 [1665]	65-5/16 [1659]	65-9/16 [1665]	62-5/8 [1591]	61 [1549]	24 [610]	24 [610]	41-7/8 x 36-1/16 [1064 x 916]	49,000

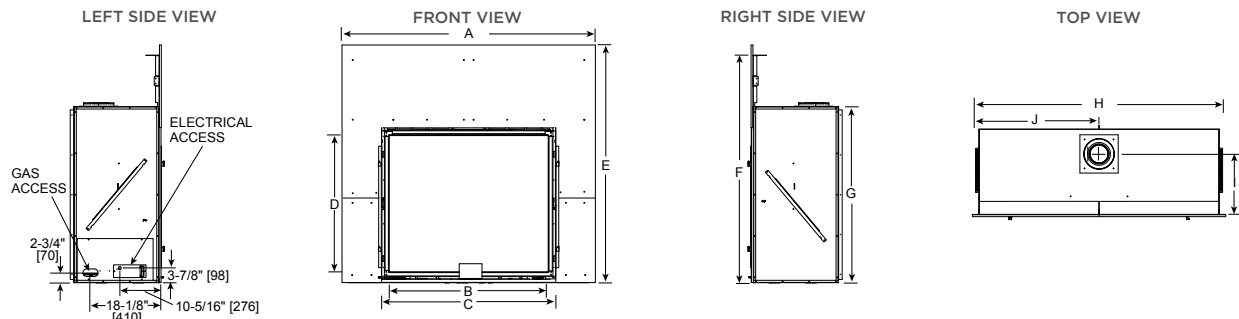

MODEL	A	B	C	D	E	F	G	H	I	J
LUX36	61" [1549]	35-7/8" [911]	39-7/8" [1013]	31-1/16" [789]	57-5/8" [1464]	54-15/16" [1395]	41-3/8" [1042]	59-1/4" [1505]	16" [406]	29-5/8" [752]
LUX42	67" [1702]	41-7/8" [1064]	45-7/8" [1165]	36-1/16" [916]	62-5/8" [1591]	59-15/16" [1522]	46-3/8" [1178]	65-5/16 [1659]	16" [406]	32-11/16" [830]

*Front dimensions include non-combustible material which overlaps framing

Dimensions are in inches and millimeters. Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions shipped with product. We recommend measuring individual units at installation. Assumes the use of 1/2" sheetrock. NOTE: Combustible material should not cover the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo® reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.

U.S. EFFICIENCIES

Steady State - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

AFUE - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

RATING	LUX36	LUX42
STEADY STATE	60.9% (NG)	69.5% (NG)
AFUE	59.0% (NG)	67.3% (NG)

CANADA EFFICIENCIES

EnerGuide (CSA P.4.1-02) - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

RATING	LUX36	LUX42
ENERGUIDE (CSA P.4.1-02)	59.4% (NG)	66.0% (NG)

For complete information on this model, please contact us at:

HEAT & GLO®

No one builds a better fire

Web: heatnglo.com
 Phone: (888) 427-3973 (952) 985-6000
 E-mail: info@heatnglo.com

[facebook.com/HeatandGlo](https://www.facebook.com/HeatandGlo)
twitter.com/HeatandGlo
[youtube.com/HeatandGlo](https://www.youtube.com/HeatandGlo)

HNG-1120U-1014

LIMITED LIFETIME WARRANTY*

The strongest in the industry, Heat & Glo® provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

3 For full warranty details, go to www.heatnglo.com.

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplacesafety

Canada

ENERGUIDE

Look for the EnerGuide Gas Fireplace Energy Efficiency Rating in this brochure
 Based on CSA P.4.1-02

