ENERGY PRO

DIRECT VENT GAS FIREPLACE



POWERFUL. EFFICIENT. BEAUTIFUL.

ENERGY PRO

Combining the power and efficiency of a furnace, with the beauty of fire. It's never been done. Until now. The groundbreaking, award-winning Energy Pro is here.

SUPERIOR EFFICIENCY

Harness the heating power of 92.6% efficiency. Send the warmth to up to 4 rooms, or tie into your home's central heating system. The Energy Pro is so efficient and effective, it moonlights as a central furnace.

ULTIMATE REALISM

Vibrant flames. High Definition logs. LED accent lighting. Illuminated embers. A full viewing area and clean finish. Ultra high efficiency has never looked this good. Or this real.



FRONT OPTIONS



Folio Front

FINISHES



CONTROL

Customize your comfort. Easily program heating settings with an advanced wireless programmable thermostat.



COVER: ENERGY PRO interior LEFT: ENERGY PRO shown with folio front in black. ABOVE: ENERGY PRO shown with forge front in graphite

ENERGY PRO TECHNOLOGY



DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality. To learn more about Direct Vent technology, visit heatnglo.com.



ZONE HEATING

Redirect the heat output of your fireplace. Warm up to four separate spaces, or tie into your home's central heating system. Zone heating spreads the warmth of the Energy Pro into the areas you need it most.




MICRO-VENTING

The Energy Pro uses exclusive dual-walled 4-inch coaxial vent pipe (CVP) to stretch up to 60 feet of horizontal run through standard 6-inch walls. For installation almost anywhere. CVP aids efficiency by managing condensation, and is made with a recyclable material.

ENERGY PRO SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HOUR INPUT
	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	02/0000122	
HE36CLX-S	41 [1041]	42 [1067]	41 [1041]	42 [1067]	43-11/16 [1109]	44 [1118]	27-1/2 [698]	28 [711]	31 x 35-1/4 [787 x 895]	36,000

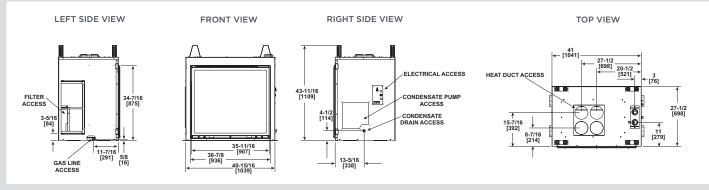

Dimensions are in inches and millimeters. Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions shipped with product. We recommend measuring individual units at installation. Assumes the use of 1/2" sheetrock. NOTE: Combustible material should not cover the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo® reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.

U.S. EFFICIENCIES

Steady State - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

AFUE - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

CANADA EFFICIENCIES

EnerGuide (CSA P.4.1-09) - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

RATING	ENERGY PRO			
STEADY STATE	89.8% (NG) 89.8% (LP)			
AFUE	92.6% (NG) 92.6% (LP)			

RATING	ENERGY PRO
ENERGUIDE	86.3% (NG)
(CSA P.4.1-09)	87.8% (LP)

For complete information on this model, please contact us at:



No one builds a better fire

Web: heatnglo.com Phone: (888) 427-3973 (952) 985-6000 E-mail: info@heatnglo.com

facebook.com/HeatandGlo

twitter.com/HeatandGlo

youtube.com/HeatandGlo

HNG-1124U-1214

LIMITED LIFETIME WARRANTY¹

The strongest in the industry, Heat & Glo provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

1 For full warranty details, go to www.heatnglo.com. Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplacesafety.





Z21.88/CSA America Interim Requirement 1.09/Z21.47