

Ion Series





modern Versatility

Take modern style to new places with the lon gas fireplace series. At only 7-inches deep, these vertical and horizontal models can install in nearly any room—quicker and easier than other fireplaces. Two front color choices and an ambient backlighting option create a truly unique look in any environment. Think differently about fire and take modern style to new places. It's all possible with the lon series.



Ion Series Features

- Horizontal and vertical models
- Ambient LED backlighting option
- Two fronts available in bronze or black
- Up to 24,000 BTUs

Options

Fronts







Vertical in Bronze

LED Backlighting













Black Glass Liner



Technologies

IntelliFireTM Plus Ignition System The IntelliFire Plus ignition system (IPI Plus) is an advanced intermittent pilot ignition system with memory settings and a programmable wireless control. IPI Plus constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs. To learn more, visit heatilator.com.

Direct Vent Technology Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality. To learn more, visit heatilator.com.


Cover: Ion Horizontal with black Four Square front

Left: Ion Vertical with bronze Four Square front and LED backlighting




Technical Specifications

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		VIEWING AREA	BTU/HR INPUT
	UNIT	FRAMING*	UNIT	FRAMING*	UNIT	FRAMING*	UNIT	FRAMING*	VIEWING AREA	DIU/AK INPUI
Ion Vertical	19-1/4"	20-1/8"	19-1/4"	20-1/8"	36-1/8"	43-1/8"	6-3/8"	2-5/8"	12" x 24"	8,200-14,250 NG
	[489]	[511]	[489]	[511]	[918]	[1095]	[162]	[67]	[305 x 610]	8,500-13,350 LP
Ion Horizontal	38-1/4"	39-3/8"	38-1/4"	39-3/8"	29-1/8"	39	6-3/8"	2-5/8"	31" x 17"	12,700-24,000 NG
	[972]	[1000]	[972]	[1000]	[740]	[991]	[162]	[67]	[787 x 432]	10,850-20,000 LP

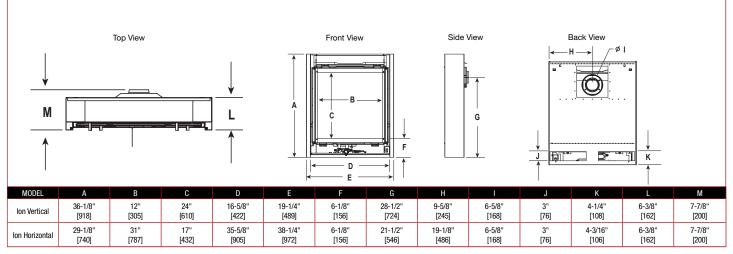

Clearances

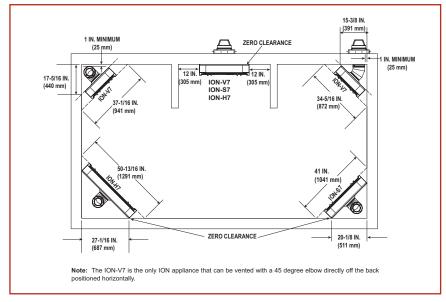

Framing

MODEL	А	В	С		
Ion Vertical	20-1/8" [511]	43-1/8" [1095]	4" min.		
Ion Square	29-3/8" [746]	40-1/2" [1029]	4" min.		
Ion Horizontal	39-3/8" [1000]	39 [991]	4" min.		
WALL - FRAMED					
FINISHED FLOOR C=4	IN. MIN.	_ A	B		

The rough framing dimensions shown represent the distance from stud to stud only and do not take into consideration the addition of drywall. Please refer to installation instructions for complete specifications and drawings when installing this product. Go to heatilator.com to download.

EnerGuide (CSA P.4.1-15) Ratings Used in Canada and some U.S. states to measure annual fireplace efficiency.

Ion Vertical	Ion Horizontal		
60.2% (NG)	67.5% (NG)		

Available from



800-927-6841 | heatilator.com

facebook.com/Heatilator

twitter.com/Heatilator

youtube.com/HeatilatorFireplaces

HTL-1093U-0617

Limited Lifetime Warranty*

The strongest in the industry, Heatilator provides a limi lifetime warranty on gas-burning products of the most important aspects: firebox and heat exchanger. rides a limited

*For full warranty details go to heatilator.com.

The information provided in this literature is for planning purposes only and subject to change. Please consult the installation manual for actual installation. Actual product appearance may differ from product images

Fireplace glass and other surfaces get extremely HOT and ca cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatilator.com/fireplacesafet

