

heatilator[®]
The first name in fireplaces



Novus nXt
direct vent gas fireplaces

Novus nXt

direct vent gas fireplaces

Cover: Novus nXt shown with demi front in black and custom surround

Left: Novus nXt shown standard with custom surround



Traditional Style, Proven Value, 2.0

The Novus nXt is the second generation of the best-selling gas fireplace of all time. Design enhancements create a more sleek finish and robust fireside experience. Technology upgrades include 5 flame intensity settings and enhanced efficiency.

Experience the value of Heatilator. Enjoy the Novus nXt for years to come.

Features

- 33" or 36" viewing area
- Brick interior enhances flame and glowing embers
- Detailed 7-piece log set
- 69% AFUE efficiency rating
- Make it your own with multiple fronts, finishes and optional fan

IntelliFire™ Plus Ignition System

The IntelliFire™ Plus Ignition System (IPI Plus) is an advanced intermittent pilot ignition system with memory settings and a programmable wireless control. IPI Plus constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs.



To learn more, scan the code with your smartphone, or visit heatilator.com.

Direct Vent Technology

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.



To learn more, scan the code with your smartphone, or visit heatilator.com.

Standard Features

Front



Simon Front

Refractory



Traditional Refractory

IntelliFire Plus Wireless Control

IntelliFire Plus RC200 This remote control is designed to wirelessly control the Novus nXt. The RC200 can also be docked on the wall to mimic a thermostat, or used as a remote.

Features: Auto Battery Backup, Battery Strength Indicator, Pilot Activation, On/Off, 5 Step Flame Height, Fan Speed, Child Lock




Left: RC-200 wireless remote control
Above: RC-200 in wall docking station.

Upgrade Options

Demi Front


Finish options shown here available for the Demi front.



Demi Non-Operable Front



Bronze



Black

Additional Options Not Pictured

- Fan Kit
- Gas Conversion Kits
- Mantels and Surrounds

Venting

- Direct Vent: DVP pipe
- Direct Vent: SLP Pipe

IntelliFire Plus Wireless Control

IntelliFire Plus RC300 This remote control is designed to wirelessly control the Novus nXt. A large LCD screen and simple navigation provide easy operation. The RC300 can also be docked on the wall to mimic a thermostat, or used as a remote.

Model: RC300-HTL

Features: Auto Battery Backup, Pilot Activation, On/Off, 5 Step Flame Height, Fan Speed (auxiliary 1), two additional Auxiliary Functions, Room Temperature Readout, Thermostat Mode, Timer Mode, Child Lock



Left: RC-300 wireless remote control
Above: RC-300 in wall docking station.

Models Available

MODEL	BTU/HR INPUT(NG)	OPENING SIZE
NNXT3933I	16,000 - 29,000	33" (838mm)
NNXT4236I	18,500 - 31,000	36" (914mm)

U.S. Efficiencies

Steady State - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

AFUE - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

Rating	NNXT3933I	NNXT4236I
Steady State	82%	81%
AFUE	70%	69%


Canada Efficiencies

EnerGuide (CSA P.4.1-02) - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

Rating	NNXT3933I	NNXT4236I
EnerGuide (CSA P.4.1-02)	72%	72%

Technical Specifications

MODEL	FRONT WIDTH (A)	BACK WIDTH (C)	HEIGHT	DEPTH	GLASS SIZE (B)
NNXT3933I	38" (965mm)	11-5/8" (295mm)	34" (864mm)	19-1/8" (486mm)	33"w x 22-5/8"h
NNXT4236I	41" (1041mm)	14-5/8" (371mm)	34" (864mm)	19-1/8" (486mm)	36"w x 22-5/8"h


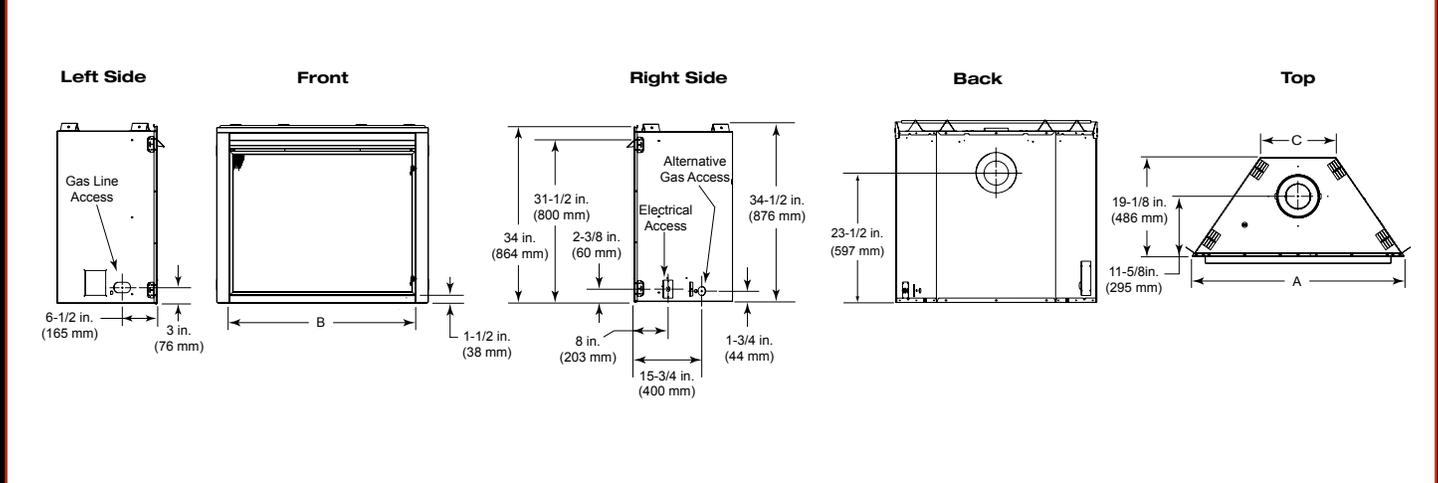


Clearances

MODEL	A	B	C	D	E	F	G
NNXT3933I	39" (991mm)	35-1/2" (902mm)	19-5/8" (498mm)	43-3/8" (1102mm)	47" (1194mm)	53-1/4" (1353mm)	40" (1016mm)
NNXT4236I	42" (1067mm)	37-5/8" (956mm)	19-5/8" (498mm)	43-3/8" (1102mm)	47" (1194mm)	53-1/4" (1353mm)	43" (1092mm)

Framing

MODEL	A ROUGH OPENING (WIDTH)	B ROUGH OPENING (HEIGHT)	C ROUGH OPENING (DEPTH)	D ROUGH OPENING (DVP PIPE)	D ROUGH OPENING (SLP PIPE)
NNXT3933I	39" (991mm)	34-7/8" (886mm)	19-5/8" (498mm)	10" (254mm)	9" (229mm)
NNXT4236I	42" (1067mm)	34-7/8" (886mm)	19-5/8" (498mm)	10" (254mm)	9" (229mm)

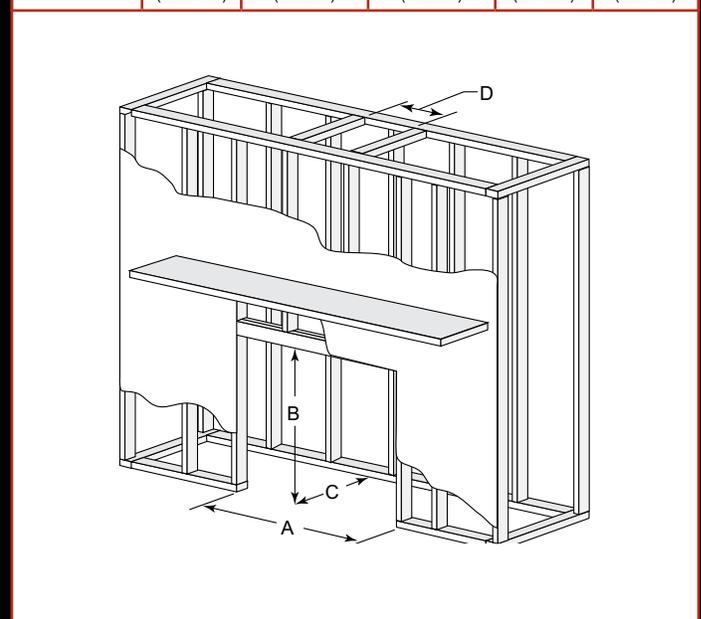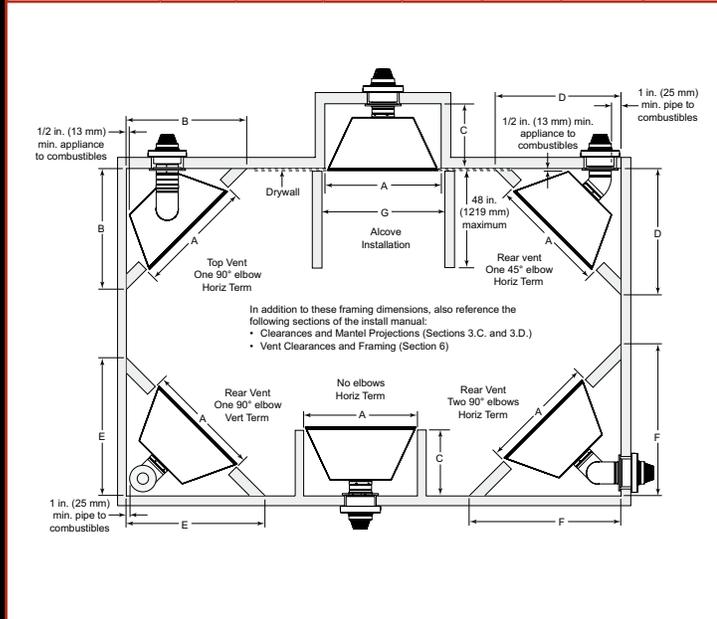

The rough framing dimensions shown represent the distance from stud to stud only and do not take into consideration the addition of drywall. Please refer to installation instructions for complete specifications and drawings when installing this product. Go to heatilator.com to download.

Available From

heatilator
The first name in fireplaces

a brand of
Hearth & Home Technologies®

1915 West Saunders Street
Mt. Pleasant, Iowa 52641
800-927-6841 | heatilator.com

[facebook.com/Heatilator](https://www.facebook.com/Heatilator)
twitter.com/Heatilator
[youtube.com/HeatilatorFireplaces](https://www.youtube.com/HeatilatorFireplaces)

HTL-1067U-0413

Limited Lifetime Warranty*

The strongest in the industry, Heatilator provides a limited lifetime warranty on gas-burning products of the most important aspects: firebox and heat exchanger.

The information provided in this literature is for planning purposes only and subject to change. Please consult the installation manual for actual installation. Actual product appearance may differ from product images. *For full warranty details go to heatilator.com. Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatilator.com/fireplacesafety



Look for the EnerGuide Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P4 1-02