

PRODUCT SPECIFICATIONS

WDVP600 Echelon Direct Vent Fireplace System



DIMENSIONS

Actual size: $57\frac{1}{8}"$ W x $35\frac{7}{16}"$ H x $18\frac{15}{16}"$ D
(1451 mm x 900 mm x 481 mm)


Viewing area: $47\frac{1}{8}"$ W x $13\frac{3}{4}"$ H (648 sq in.)
(1197 mm x 349 mm)

Framing Dimensions: $57\frac{5}{8}"$ W x $35\frac{5}{8}"$ H x $18\frac{5}{8}"$ D
(1464 mm x 905 mm x 473 mm)

FIELD INSTALLED ACCESSORIES

- Trim Kits: Black Texture Inside Fit Trim Kit (WDV600TKB)
- Signature Command System Dual Forced Blowers (160 cfm) BLOTBLDVSC
- Contemporary Stainless Steel Face (WDV600CSS)
- Contemporary Textured Black Face (WDV600FBT)
- Contemporary Iron Age Face (WDV600FIA)
- Aged Driftwood Log Set (ADW600)
- Safety Screen Barrier Included




FRAMING DIMENSIONS

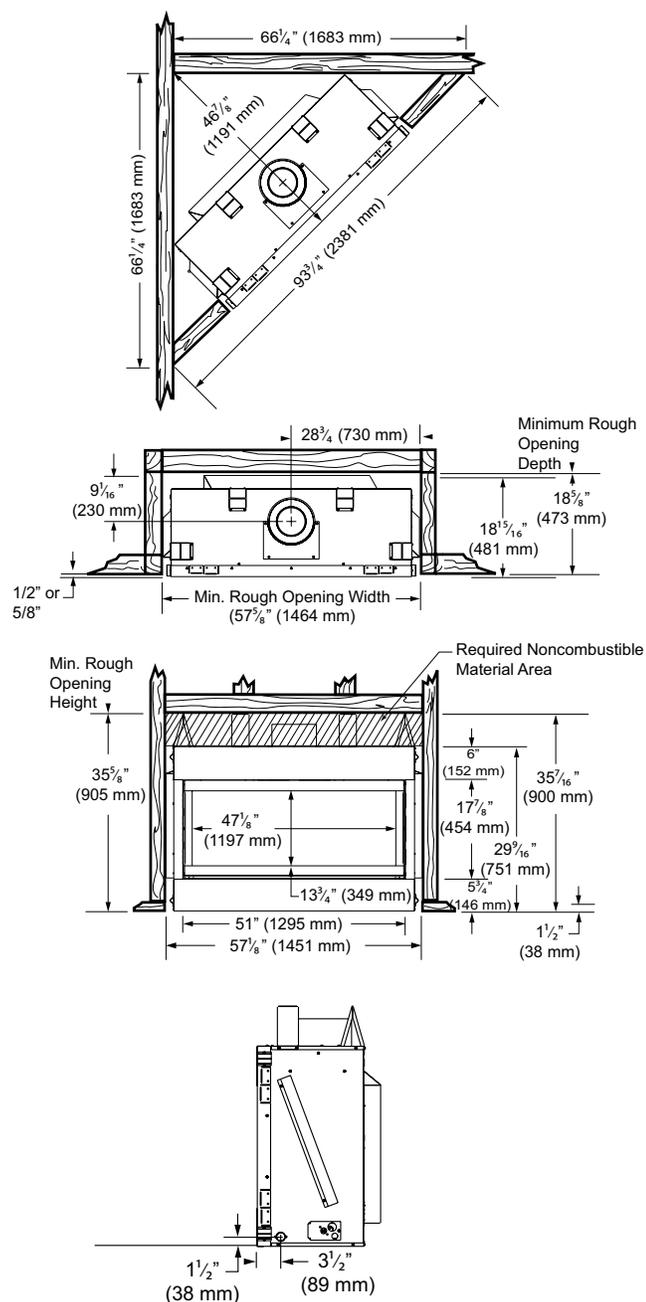

PRODUCT SPECIFICATIONS

WDVP600 Echelon

Direct Vent Fireplace System

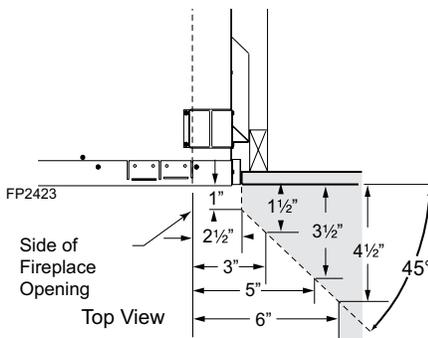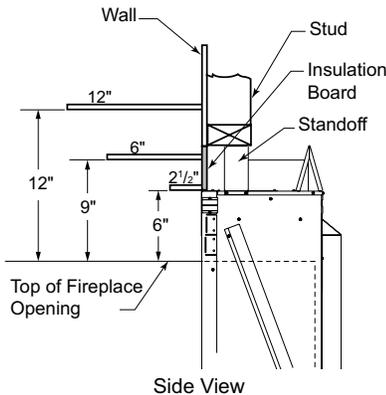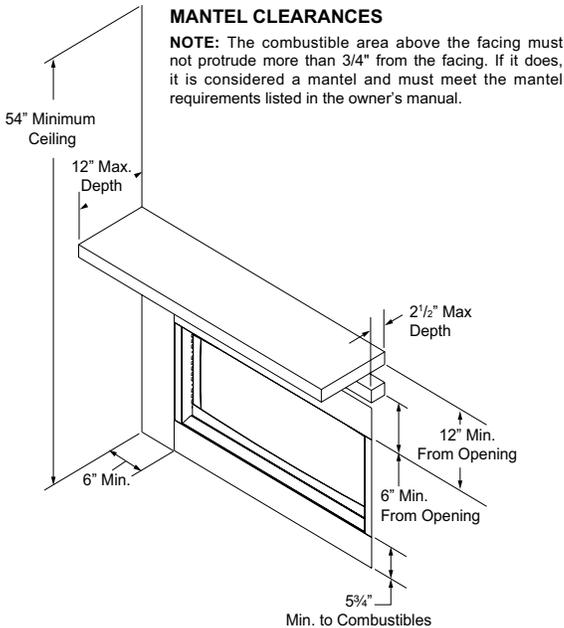

TECHNICAL SPECIFICATIONS

Highly featured contemporary unit with compact design for ease of installation

Max. BTU Input: 45,000 BTU/HR NG; 40,000 BTU/HR LP

Ignition System: Signature Command System

Comes with TSFSC hand held remote

Gas Type: Natural or LP

Top venting only with 5 x 8 DVP (requires 12" rise before 90 degree elbow for horizontal runs)

18" flex line with On/Off shut-off valve included

Contemporary bronze glass beads and natural stone kit included

Anti-reflective ceramic glass door with quick latch system for easy access

Contemporary glass illumination light system

Black Porcelain Liner Kit Standard

CSA Design Certified

CLEARANCE TO FLUE

Minimum 1" (76mm) clearance to the top along horizontal length until flue penetrates outside wall*

Minimum of 1" (25 mm) clearance to combustibles permitted at outside wall

CLEARANCE TO COMBUSTIBLES

Fireplace: 0" clearance to standoffs on all sides

Floor of Unit to Ceiling: 54" (m) to combustibles

Firebox Opening to Wall: 6" (152mm)

Hearth Requirement: 0"

EFFICIENCY DATA

Thermal Efficiency: Up to 80%

AFUE Efficiency: 65.9% (Nat.) / 66.1% (LP)

P4 Canada Efficiency: 70.2% (Nat.) / 72.2% (LP)

*When vertical rise is 7-1/2' (2.29 m) or higher from base of unit, the horizontal vent clearance to combustibles is 1" (25 mm) on all sides.



149 Cleveland Drive, Paris, Kentucky 40361

www.majesticproducts.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. ©2015 Hearth & Home Technologies® 1115v2