

PRODUCT SPECIFICATIONS BDVSC(7)500 Direct Vent



GLASS VIEWING AREA

33"W x 20-3/8"H (672 Square Inches)

TECHNICAL INFORMATION

Max. Btu Input: 26,000 BTU/HR

Ignition System: Signature Command™ System

Gas Type: Natural or LP

Flue Type: Simpson Dura-Vent, Selkirk Metalbestos, MetalFab

Termination: Rear/Top Vent Convertible

Clearance to Flue for Interior: 3" Top, 1" Bottom and Sides**

Clearance to Flue for Outside Wall: 1"

Clearance to Fireplace: 1/2"

CSA Design Certified

FIELD INSTALLED ACCESSORIES

Louvers: Polished Brass, Pewter

Curved Trim: Brass, Pewter, Black

Medium Trim Kit: Brass, Pewter, Black

Control Variable Thermostat Controlled Forced Air Blower
(160 cfm) - BLOT

Signature Command Forced Air Blower (160 cfm) - BLOTSC
Fan and Cord: FK12 (160 cfm)

FK12 Speed Control: SCVS

Cottage Clay firebrick

Cottage Red firebrick


Mesh Glass Cover

Ambient Technologies™ Remote Controls and Thermostats

Wood Cabinet Surrounds

Designer Facings

** If vertical rise is 7-1/2 feet or higher when in top vent configuration only, the vent clearance to combustibles is 1" on all sides of the horizontal run.

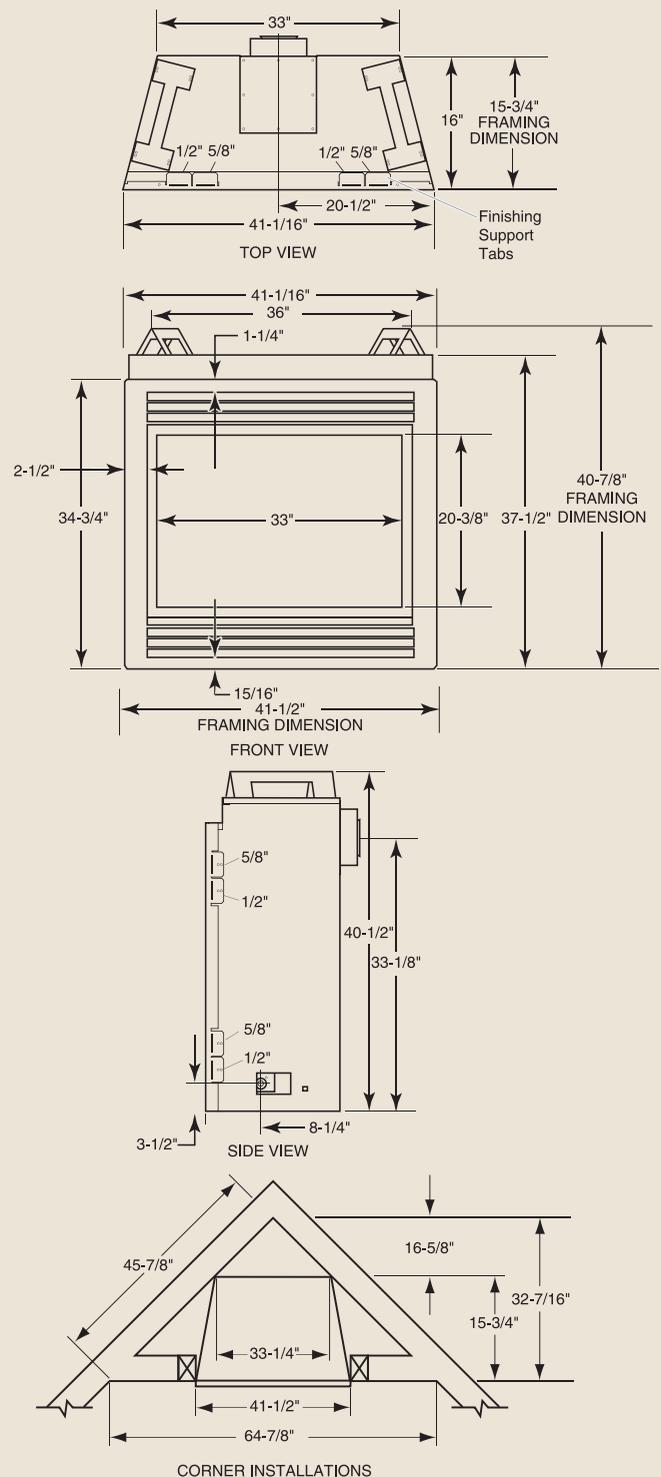

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361

www.monessenhearth.com

 **Monessen**

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2010 Monessen Hearth Systems Co. 04/10