



Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.


Allusion Heritage 36"

Traditional Electric Fireplace
Post-Paint Installation

FRAMING DIMENSIONS

MODEL	UNIT	W1	H1*	D1*	W2	D2	D3
SF-ALLH36	in.	37-3/4	31-1/2	12	55	38-29/32	27-1/2
	mm	959	800	305	1397	988	699

***NOTE:** The H1 framing dimension is with the bottom trim removed. The bottom trim can only be used for an off-the-ground installation. If installing the appliance on a sub-floor, the H1 framing dimension must be adjusted to accommodate the finishing flooring thickness.

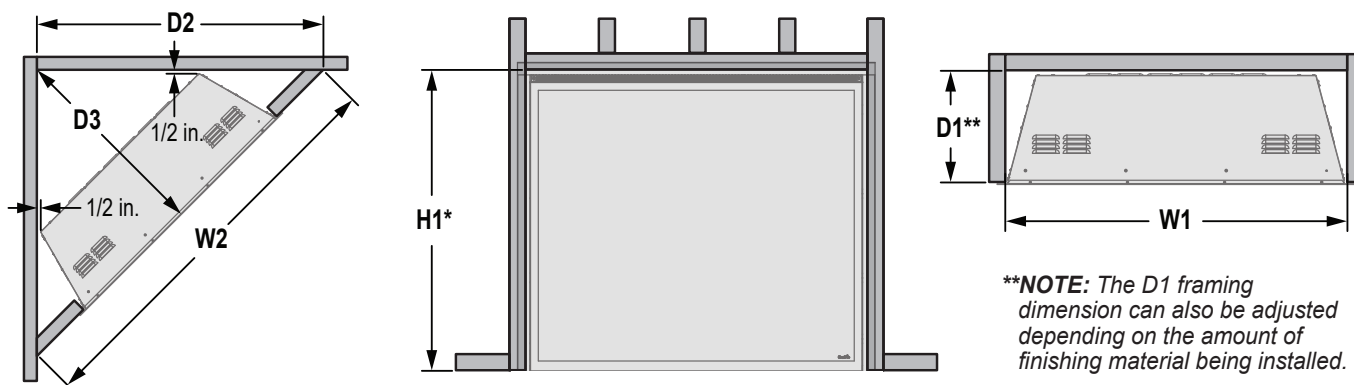



****NOTE:** The D1 framing dimension can also be adjusted depending on the amount of finishing material being installed.

MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
TOP	0 in.
BOTTOM	0 in.
SIDES	0 in.
BACK	0 in.

AREA	CLEARANCES
FRONT	36 in. [914 mm]
OVERHANG (0-6.9 in.)	0 in.
OVERHANG (7-12 in.)	2-1/2 in. [64 mm]

Maximum Combustible and Non-Combustible Overhang Projections

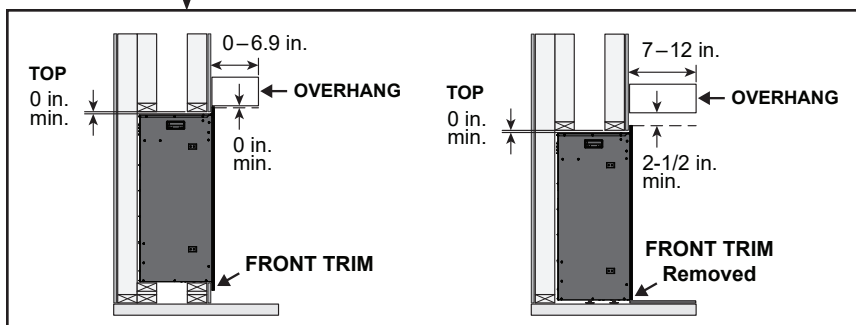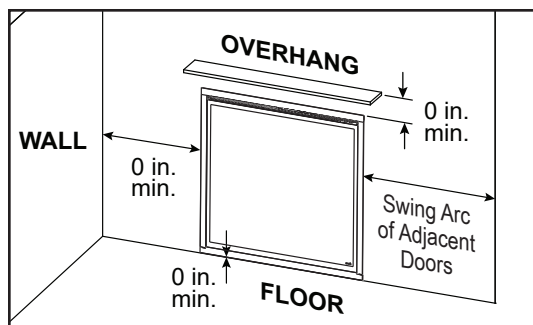

ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz/1400W	Hardwire or plug-in	5,000
20 AMP, 240V/60 Hz/2800W	Hardwire only	10,000

Product information provided is not complete and is subject to change without notice.
Product installation must adhere strictly to instructions accompanying product to
avoid risk of fire and potential injury.


Allusion Heritage 36"

APPLIANCE CERTIFICATION

MODEL: SF-ALLH36 | LABORATORY: CSA International | STANDARD: CSA C22.2 No 46-13; UL 2021 (4th Edition)
TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters

PRODUCT DIMENSIONS


MODEL	UNIT	A	B	C	D	E*	F	G	H	I
SF-ALLH36	in.	39-1/4	33	34	26-11/16	11-1/2	31	18-3/4	36-3/4	30-3/4
	mm	997	838	864	678	292	787	476	933	781

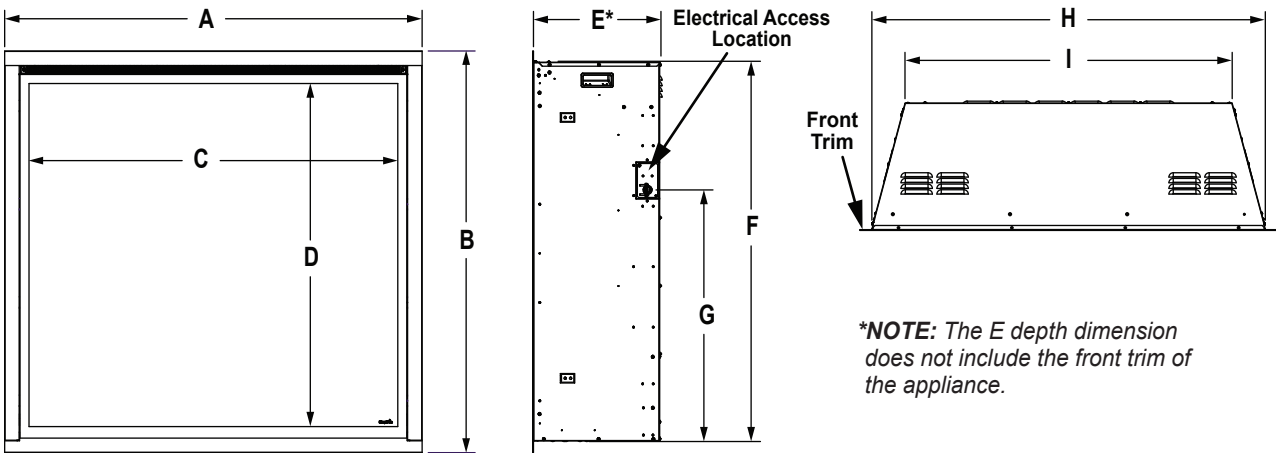

**NOTE: The E depth dimension does not include the front trim of the appliance.*

FINISHING & FLOORING

MAX COMBINED DRYWALL & FINISHING MATERIAL THICKNESS IS 3"

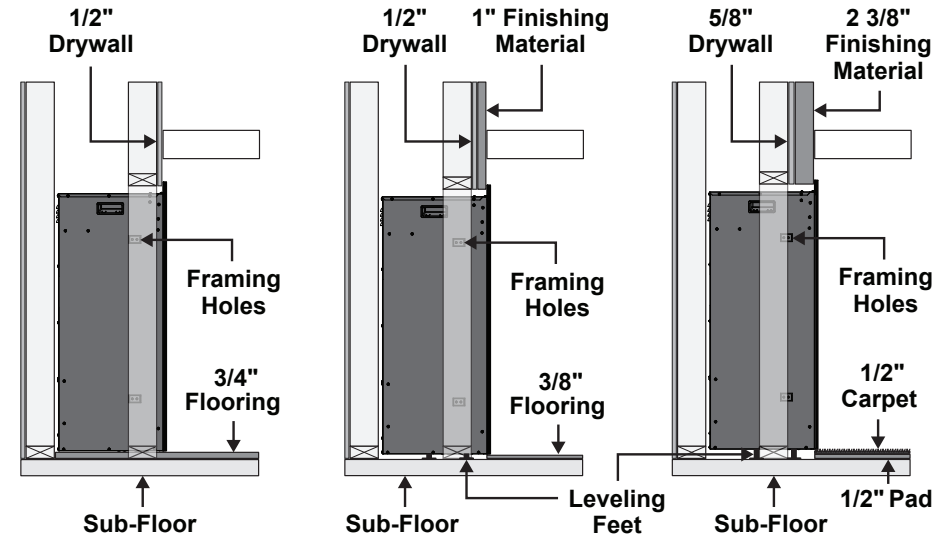

Post-Paint Installation:
The drywall/finishing material must be installed before installation of the appliance into the wall.
Drywall/finishing material must be brought to the edge of the framed opening to ensure that the front trim of the appliance overlaps the finishing material on all sides.

MAX FLOORING THICKNESS IS 1" WHEN USING LEVELING BOLTS