



Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.


Allusion Heritage 42"

Traditional Electric Fireplace
Post-Paint Installation

FRAMING DIMENSIONS

MODEL	UNIT	W1	H1*	D1*	W2	D2	D3
SF-ALLH42	in.	42	40	13-1/2	62	44-1/32	30-3/4
	mm	1067	1016	343	1575	1118	781

***NOTE:** The H1 framing dimension is with the bottom trim removed. The bottom trim can only be used for an off-the-ground installation. If installing the appliance on a sub-floor, the H1 framing dimension must be adjusted to accommodate the finishing flooring thickness.

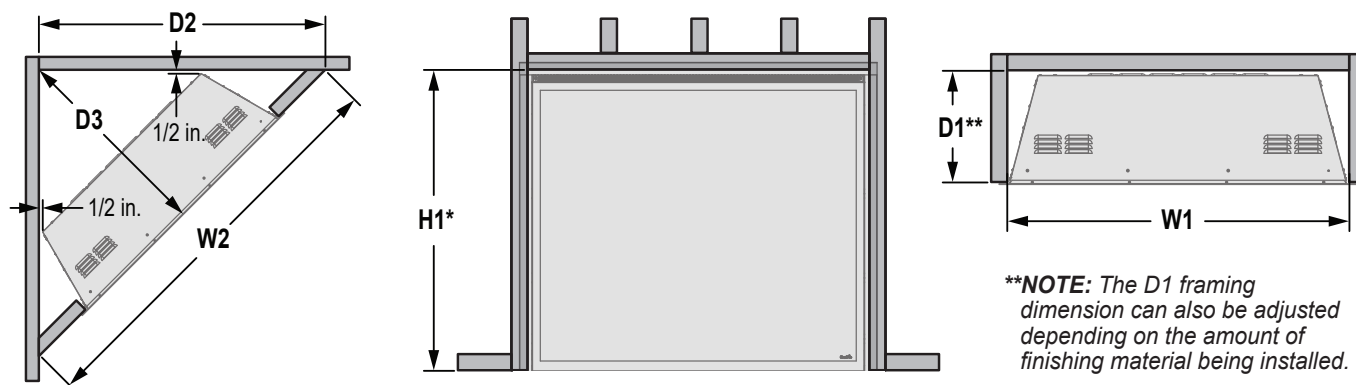



****NOTE:** The D1 framing dimension can also be adjusted depending on the amount of finishing material being installed.

MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
TOP	0 in.
BOTTOM	0 in.
SIDES	0 in.
BACK	0 in.

AREA	CLEARANCES
FRONT	36 in. [914 mm]
OVERHANG (0-6.9 in.)	0 in.
OVERHANG (7-12 in.)	2-1/2 in. [64 mm]

Maximum Combustible and Non-Combustible Overhang Projections

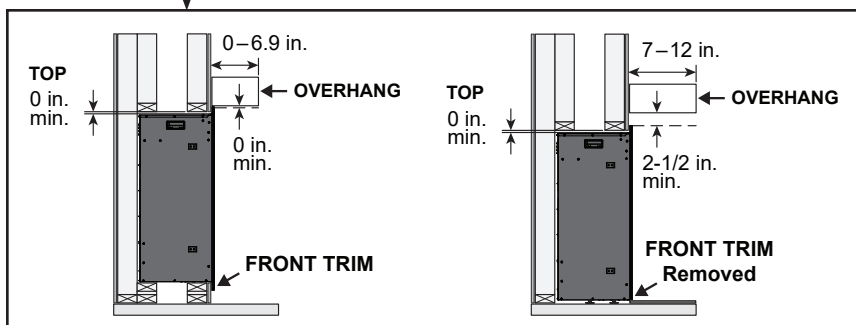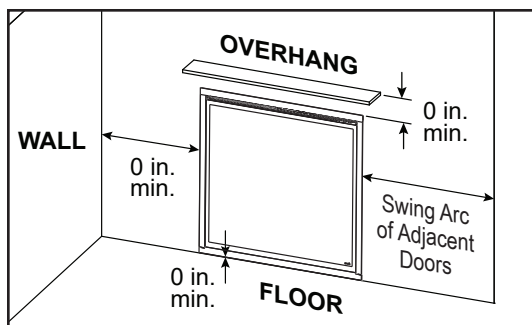

ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz/1400W	Hardwire or plug-in	5,000
20 AMP, 240V/60 Hz/2800W	Hardwire only	10,000

Product information provided is not complete and is subject to change without notice.
Product installation must adhere strictly to instructions accompanying product to
avoid risk of fire and potential injury.


Allusion Heritage 42"

APPLIANCE CERTIFICATION

MODEL: SF-ALLH42 | LABORATORY: CSA International | STANDARD: CSA C22.2 No 46-13; UL 2021 (4th Edition)
TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters


PRODUCT DIMENSIONS

MODEL	UNIT	A	B	C	D	E*	F	G	H	I
SF-ALLH42	in.	43-7/16	41-3/4	38-7/16	35-7/16	13-1/4	39-5/8	26-1/4	41	34-1/8
	mm	1103	1060	976	900	337	1006	667	1041	867

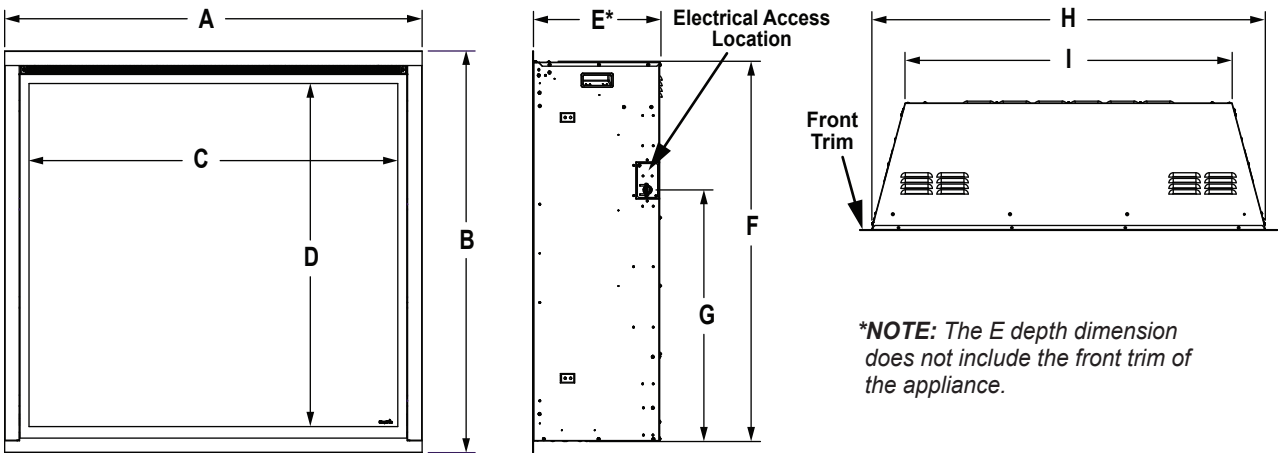

FINISHING & FLOORING

MAX COMBINED DRYWALL & FINISHING MATERIAL THICKNESS IS 3"

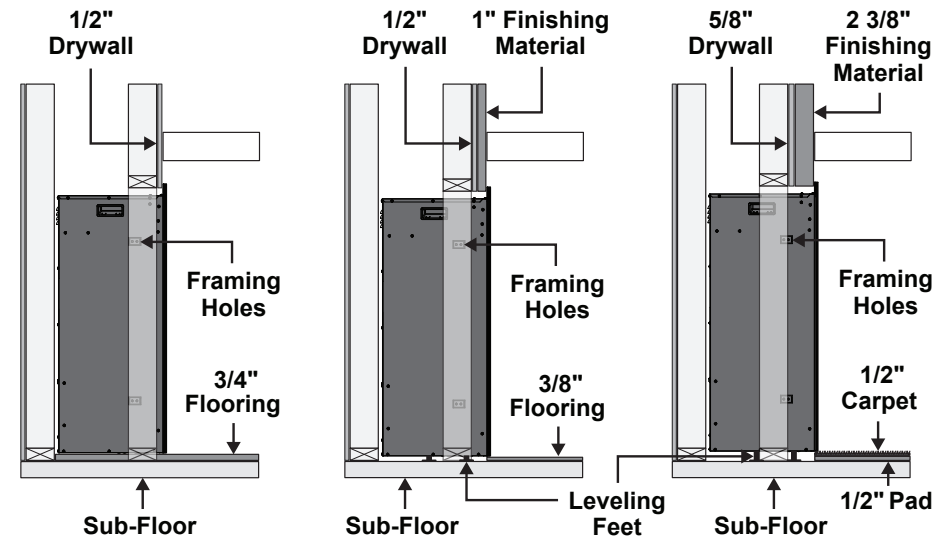

Post-Paint Installation:

The drywall/finishing material must be installed before installation of the appliance into the wall.
Drywall/finishing material must be brought to the edge of the framed opening to ensure that the front trim of the appliance overlaps the finishing material on all sides.

MAX FLOORING THICKNESS IS 1" WHEN USING LEVELING BOLTS