




Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

## Allusion Platinum 50"

Linear Electric Fireplace  
Post-Paint Installation

### FRAMING DIMENSIONS

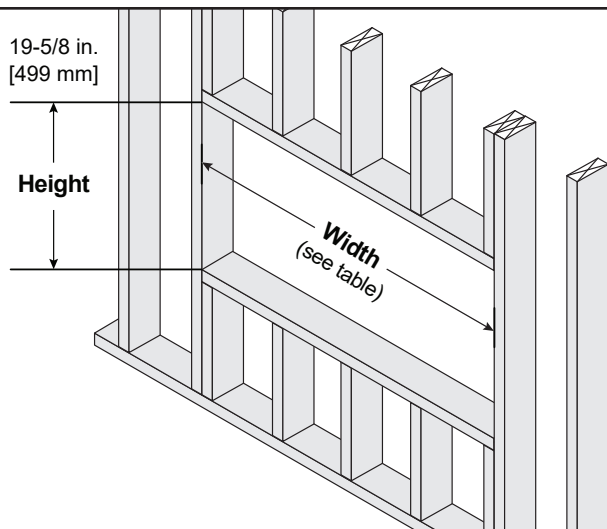



| MODEL     | UNIT | HEIGHT | WIDTH | DEPTH |
|-----------|------|--------|-------|-------|
| SF-ALLP50 | in.  | 19-5/8 | 51    | 5-1/2 |
|           | mm   | 499    | 1295  | 140   |

**Minimum Framing Depth**  
2x6 Wall (5-1/2 in. [140 mm])

### MINIMUM CLEARANCES TO COMBUSTIBLES

| AREA   | CLEARANCES |
|--------|------------|
| TOP    | 0 in.      |
| BOTTOM | 0 in.      |
| SIDES  | 0 in.      |
| BACK   | 0 in.      |

| AREA            | CLEARANCES      |
|-----------------|-----------------|
| FRONT           | 36 in. [914 mm] |
| OVERHANG (120V) | 0 in.           |
| OVERHANG (240V) | 0 in.           |

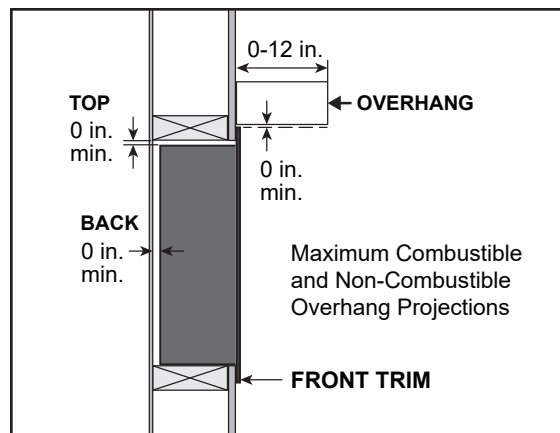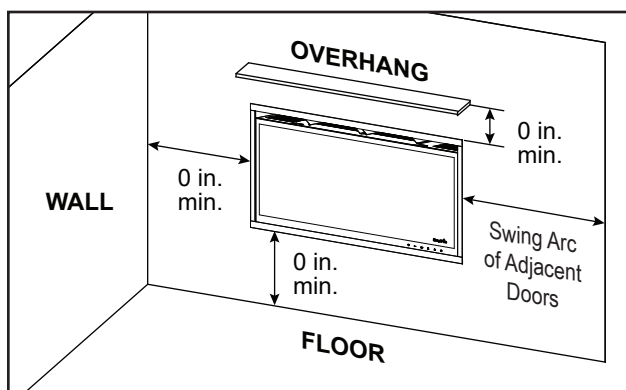

### ELECTRICAL CONNECTION REQUIREMENTS

| CIRCUIT                  | CONNECTION METHOD   | BTUS   |
|--------------------------|---------------------|--------|
| 15 AMP, 120V/60 Hz/1400W | Hardwire or plug-in | 5,000  |
| 20 AMP, 240V/60 Hz/2800W | Hardwire only       | 10,000 |

Product information provided is not complete and is subject to change without notice.  
 Product installation must adhere strictly to instructions accompanying product to  
 avoid risk of fire and potential injury.


## Allusion Platinum 50"

### APPLIANCE CERTIFICATION


MODEL: SF-ALLP50 | LABORATORY: CSA International | STANDARD: CSA C22.2 No 46-13; UL 2021 (4th Edition)  
 TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters

### PRODUCT DIMENSIONS

| MODEL     | UNIT | A      | B      | C      | D       | E       | F       | G*      | H     |
|-----------|------|--------|--------|--------|---------|---------|---------|---------|-------|
| SF-ALLP50 | in.  | 52-5/8 | 20-7/8 | 48-3/8 | 15-3/16 | 50-5/16 | 19-5/16 | 5-11/16 | 8-3/8 |
|           | mm   | 1336   | 530    | 1229   | 386     | 1278    | 491     | 145     | 213   |

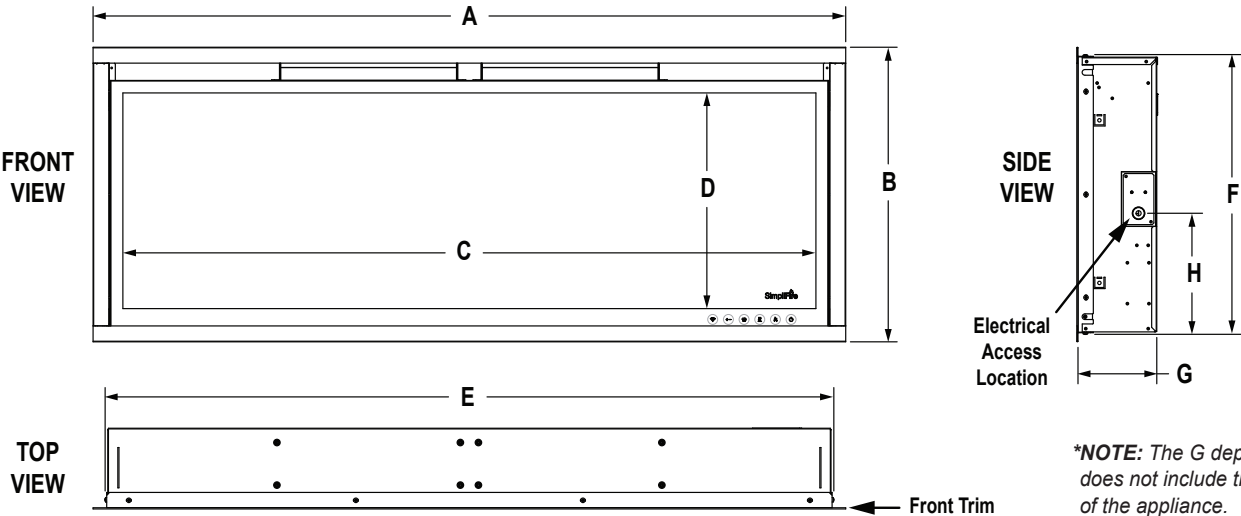

### FINISHING

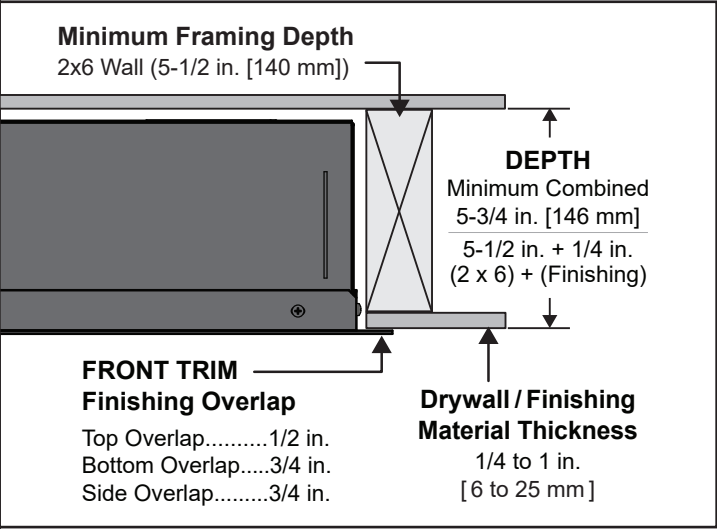

**Post-Paint Installation:** The drywall/finishing material must be installed before installation of the appliance into the wall. Drywall/finishing material must be brought to the edge of the framed opening to ensure that the front trim of the appliance overlaps the finishing material on all sides.

**Required Depth:** The appliance requires a minimum combined wall framing and drywall/finishing material thickness of 5-3/4 inches, such as a 2x6 framed wall with a minimum of a 1/4 inch of drywall/finishing material.

The maximum thickness of drywall/finishing material is 1 inch, making the accepted range 1/4 to 1 inch.

The Allusion Platinum is designed for use on painted drywall, tile, wood paneling, shiplap, and other smooth finishes including porcelain and granite, with a total thickness up to 1 inch thick when combined with drywall.