




Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

Allusion Platinum 60"

Linear Electric Fireplace
Post-Paint Installation

FRAMING DIMENSIONS

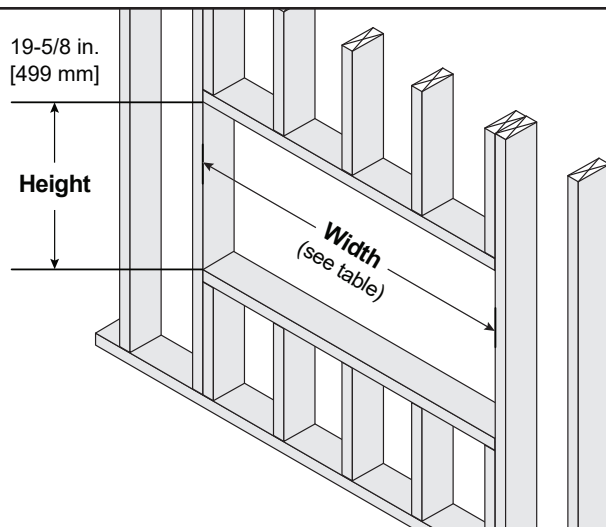



MODEL	UNIT	HEIGHT	WIDTH	DEPTH
SF-ALLP60	in.	19-5/8	61	5-1/2
	mm	499	1549	140

Minimum Framing Depth
2x6 Wall (5-1/2 in. [140 mm])

MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
TOP	0 in.
BOTTOM	0 in.
SIDES	0 in.
BACK	0 in.

AREA	CLEARANCES
FRONT	36 in. [914 mm]
OVERHANG (120V)	0 in.
OVERHANG (240V)	0 in.

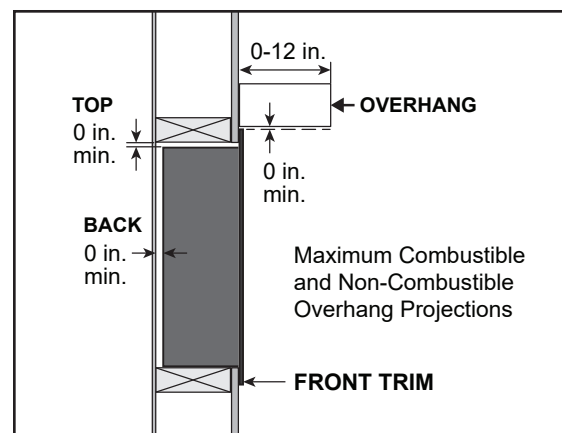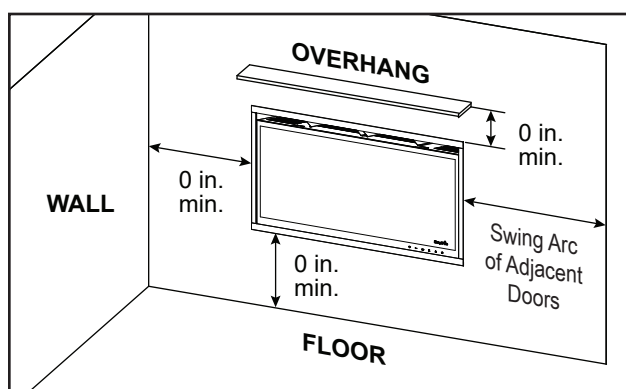

ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz/1400W	Hardwire or plug-in	5,000
20 AMP, 240V/60 Hz/2800W	Hardwire only	10,000

Product information provided is not complete and is subject to change without notice.
Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.


Allusion Platinum 60"

APPLIANCE CERTIFICATION


MODEL: SF-ALLP60 | LABORATORY: CSA International | STANDARD: CSA C22.2 No 46-13; UL 2021 (4th Edition)
TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters

PRODUCT DIMENSIONS

MODEL	UNIT	A	B	C	D	E	F	G*	H
SF-ALLP60	in.	62-5/8	20-7/8	58-5/16	15-3/16	60-1/2	19-5/16	5-11/16	8-3/8
	mm	1590	530	1480	386	1536	491	145	213

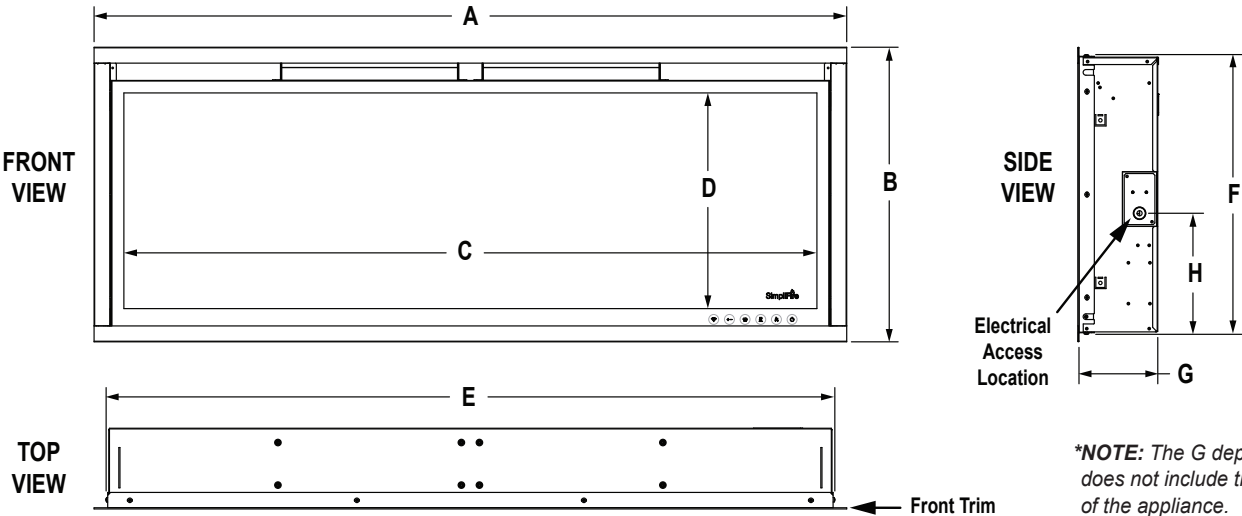

FINISHING

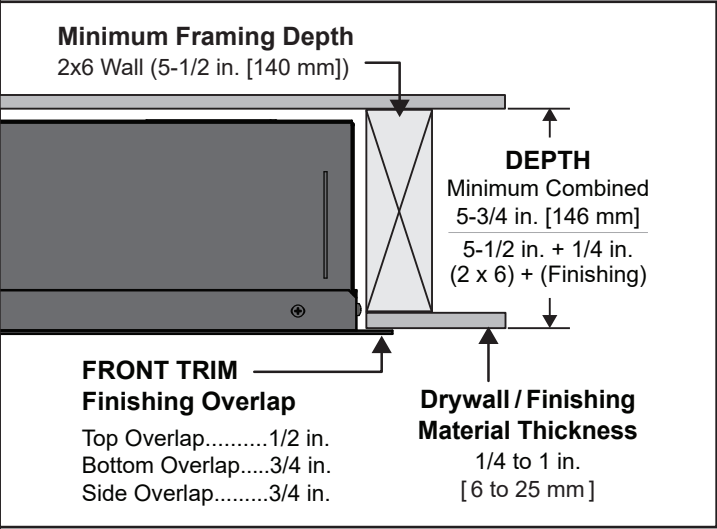

Post-Paint Installation: The drywall/finishing material must be installed before installation of the appliance into the wall. Drywall/finishing material must be brought to the edge of the framed opening to ensure that the front trim of the appliance overlaps the finishing material on all sides.

Required Depth: The appliance requires a minimum combined wall framing and drywall/finishing material thickness of 5-3/4 inches, such as a 2x6 framed wall with a minimum of a 1/4 inch of drywall/finishing material.

The maximum thickness of drywall/finishing material is 1 inch, making the accepted range 1/4 to 1 inch.

The Allusion Platinum is designed for use on painted drywall, tile, wood paneling, shiplap, and other smooth finishes including porcelain and granite, with a total thickness up to 1 inch thick when combined with drywall.