


Specifications

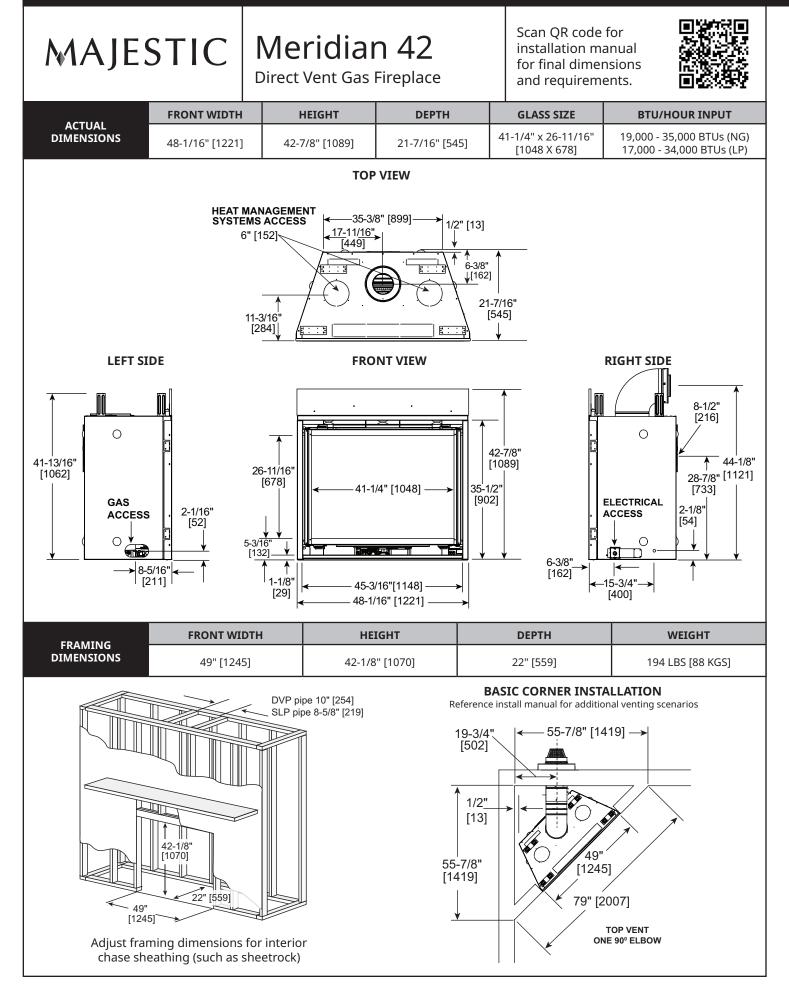


COMBUSTIBLE MANTEL PROJECTIONS

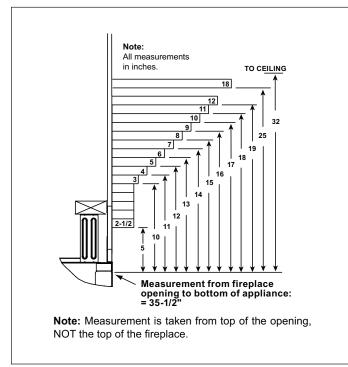

NON-COMBUSTIBLE MANTEL PROJECTIONS

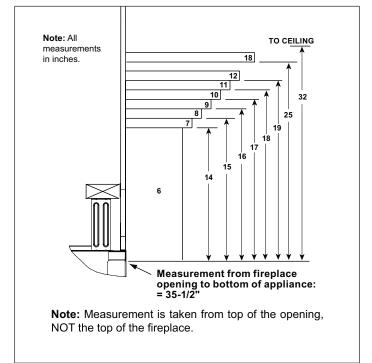


COMBUSTIBLE MANTEL LEGS OR WALL PROJECTIONS




Combustible Mantel Leg or Wall Projections (Acceptable on both sides of opening)

NON-COMBUSTIBLE MANTEL LEGS OR WALL PROJECTIONS



If using heat management please refer to the fireplace installation manual for framing guidelines and reduced mantel clearances. Additional information on venting, TV clearances, finishing requirements, fronts, etc can be found in the installation and owner's manual

EXTERIOR CHASE MINIMUM HEIGHT REQUIREMENTS

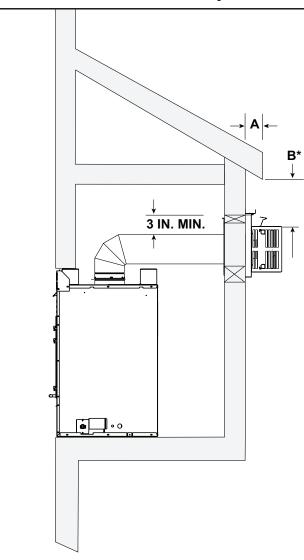

* NOTE: If overhang (A) is less than 2 inches, clearance from top of termination cap to bottom of overhang (B) may be 0 inches.


- A Measured from back of vent cap to end of overhang
- B Measured from bottom of overhang to top of termination cap

Vinyl Siding Shield (TRAP-VSS) Information

TRAP-VSS <u>required</u> if overhang (A) is greater than 3 inches but less than 5 inches and B dimension is less than 18 inches.

- TRAP-VSS <u>recommended</u> if either of the below is true:
- Overhang (A) is less than 5 inches (to combat water infiltration) - A vinyl overhang is present

WALL PENETRATION

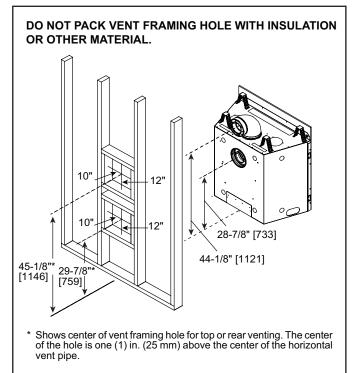

PRODUCT LISTING CODES	
US	ANSI Z21.88-2019
CAN	CSA 2.33-2019
CUL US LISTED	UL307B

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

MAJESTIC

Majestic — A Brand of Hearth & Home Technologies 7571 215th Street West | Lakeville, MN 55044 877-486-9123 | majesticproducts.com | majesticproducts.ca

