




Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.


TRANSCEND INDOOR/OUTDOOR SEE-THROUGH

LUXURY GAS FIREPLACES

INTERIOR FRONT VIEW

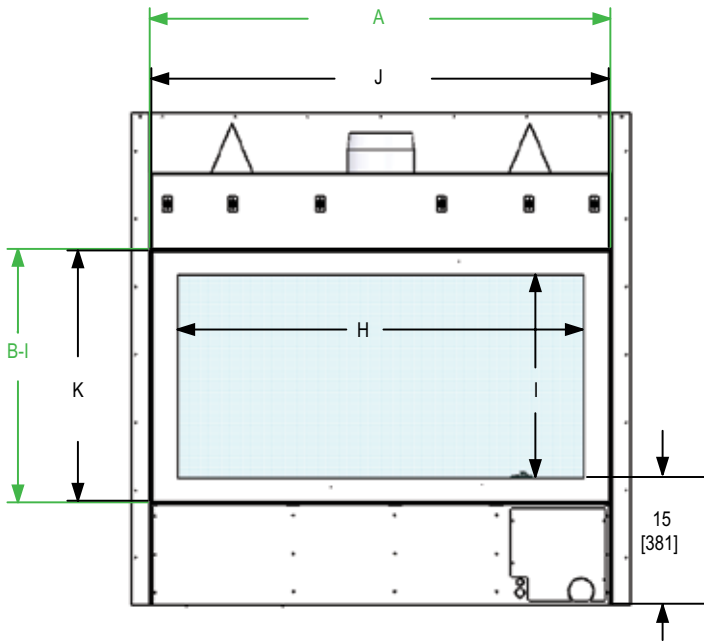


EXTERIOR FRONT VIEW

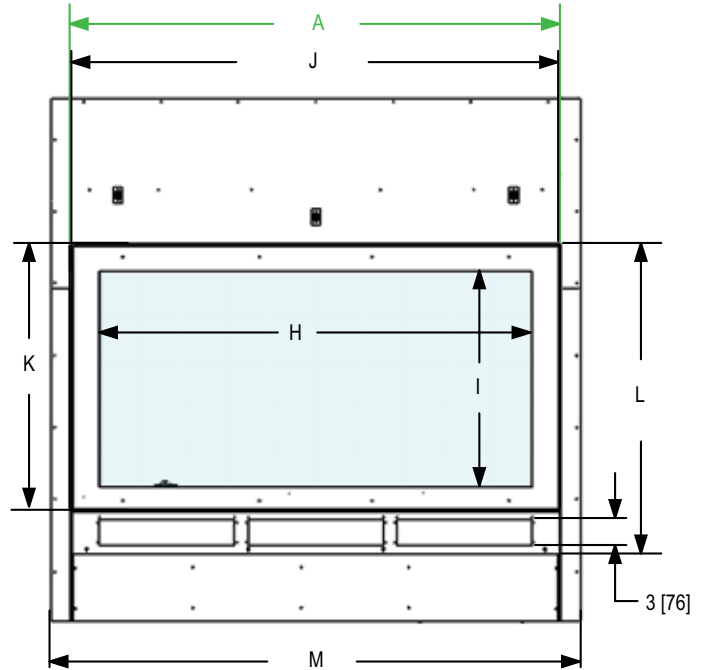


The dimensions in green are the allowable finishing width and height required to fit the glass into the fireplace. Finishing materials must not overlap these dimension.

SIDE VIEWS

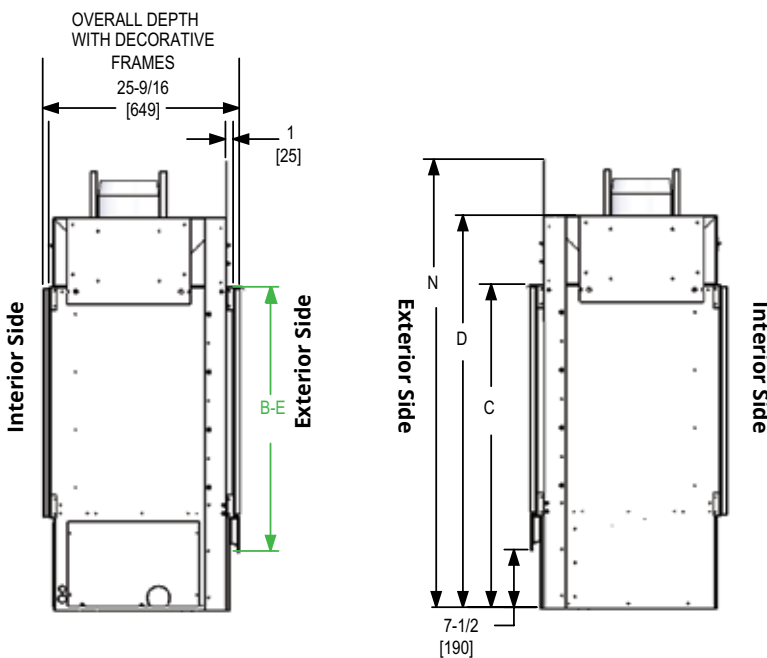

TOP VIEW

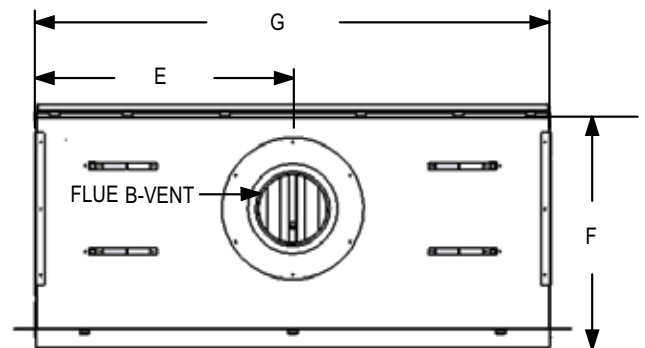

SPECIFICATIONS

Model #	BTU'S	EXHAUST B-VENT	OUTSIDE AIR	RS SERIES POWER-VENT	IN-LINE POWER-VENT
3IDOD-24GL	40,000	8"	10"	RS012	RSIF160
4IDOD-24GL	60,000	8"	10"	RS012	RSIF160
5IDOD-24GL	80,000	8"	10"	RS012	RSIF160
6IDOD-24GL	100,000	10"	10"	RS014	RSIF180
7IDOD-24GL	120,000	10"	10"	RS014	RSIF180
8IDOD-24GL	140,000	10"	12"	RS014	RSIF180
3IDOD-36GL	40,000	8"	10"	RS012	RSIF160
4IDOD-36GL	60,000	8"	10"	RS012	RSIF160
5IDOD-36GL	80,000	8"	10"	RS012	RSIF160
6IDOD-36GL	100,000	10"	10"	RS014	RSIF180
7IDOD-36GL	120,000	10"	10"	RS014	RSIF180
8IDOD-36GL	140,000	10"	12"	RS014	RSIF180

- If using an in-line power vent, use a -IN after the model number at time of order
- It is important to refer to the installation and operating manual PRIOR to installation; verify all measurements and clearances for your particular installation
- Dimensions are in inches and [millimeters]
- Air intake collar may be rotated to vent off the side, or from the bottom of the fireplace
- Use UL approved B-Vent pipe and follow all manufacturer installation guidelines
- Vent run approved up to 110' with quantity of 11, 90 degree elbows. 1" clearance to B-Vent must be maintained

IMPORTANT: MINIMUM FRAMING DIMENSIONS ARE TO COMBUSTIBLES WITH 1/2" CLEARANCE STANDOFFS IN PLACE

FIREPLACE DIMENSIONS

Model #	A FINISHING WIDTH	B I INTERIOR FINISHING HEIGHT	B E EXTERIOR FINISHING HEIGHT	C FIREBOX TOP HEIGHT	D OVERALL HEIGHT	E EDGE TO CENTER FLUE	F DEPTH	G OVERALL WIDTH	H VIEWING AREA WIDTH	I VIEWING AREA HEIGHT	J GLASS FRAME WIDTH	K GLASS FRAME HEIGHT	L GLASS FRAME HEIGHT WITH OD INTAKE	M OUTER FLANGE WIDTH	N OUTER FLANGE HEIGHT
3IDOD-24GL	42-17/32 [1,080]	30 [762]	34-23/32 [2,600]	42-1/32 [1,067]	51 [1,295]	21-1/4 [540]	24 [610]	42-17/32 [1,080]	36 [914]	24 [610]	42-5/32 [1,071]	29-5/8 [752]	34-9/16 [864]	46-15/16 [1,192]	58-7/32 [1,479]
4IDOD-24GL	54-17/32 [1,385]	30 [762]	34-23/32 [2,600]	42-1/32 [1,067]	51 [1,295]	27-1/4 [692]	24 [610]	54-17/32 [1,385]	48 [1,219]	24 [610]	54-5/32 [1,375]	29-5/8 [752]	34-9/16 [864]	58-15/16 [1,497]	58-7/32 [1,479]
5IDOD-24GL	66-17/32 [1,690]	30 [762]	34-23/32 [2,600]	42-1/32 [1,067]	51 [1,295]	33-1/4 [845]	24 [610]	66-17/32 [1,690]	60 [1,524]	24 [610]	66-5/32 [1,680]	29-5/8 [752]	34-9/16 [864]	70-15/16 [1,802]	58-7/32 [1,479]
6IDOD-24GL	78-17/32 [1,995]	30 [762]	34-23/32 [2,600]	42-1/32 [1,067]	51 [1,295]	39-1/4 [848]	24 [610]	78-17/32 [1,995]	72 [1,829]	24 [610]	78-5/32 [1,985]	29-5/8 [752]	34-9/16 [864]	82-15/16 [2,107]	58-7/32 [1,479]
7IDOD-24GL	90-17/32 [2,299]	30 [762]	34-23/32 [2,600]	42-1/32 [1,067]	51 [1,295]	45-1/4 [1,149]	24 [610]	90-17/32 [2,299]	84 [2,134]	24 [610]	90-5/32 [2,290]	29-5/8 [752]	34-9/16 [864]	94-15/16 [2,411]	58-7/32 [1,479]
8IDOD-24GL	102-17/32 [2,604]	30 [762]	34-23/32 [2,600]	42-1/32 [1,067]	51 [1,295]	51-1/4 [1,302]	24 [610]	102-17/32 [2,604]	96 [2,438]	24 [610]	102-5/32 [2,595]	29-5/8 [752]	34-9/16 [864]	106-15/16 [2,716]	58-7/32 [1,479]
3IDOD-36GL	42-17/32 [1,080]	36 [914]	46-23/32 [1,187]	54-1/32 [1,372]	63 [1,600]	21-1/4 [540]	24 [610]	42-17/32 [1,080]	36 [914]	36 [914]	42-5/32 [1,071]	41-5/8 [1,057]	46-9/16 [1,245]	46-15/16 [1,192]	70-7/32 [1,783]
4IDOD-36GL	54-17/32 [1,385]	36 [914]	46-23/32 [1,187]	54-1/32 [1,372]	63 [1,600]	27-1/4 [692]	24 [610]	54-17/32 [1,385]	48 [1,219]	36 [914]	54-5/32 [1,375]	41-5/8 [1,057]	46-9/16 [1,245]	58-15/16 [1,497]	70-7/32 [1,783]
5IDOD-36GL	66-17/32 [1,690]	36 [914]	46-23/32 [1,187]	54-1/32 [1,372]	63 [1,600]	33-1/4 [845]	24 [610]	66-17/32 [1,690]	60 [1,524]	36 [914]	66-5/32 [1,680]	41-5/8 [1,057]	46-9/16 [1,245]	70-15/16 [1,802]	70-7/32 [1,783]
6IDOD-36GL	78-17/32 [1,995]	36 [914]	46-23/32 [1,187]	54-1/32 [1,372]	63 [1,600]	39-1/4 [848]	24 [610]	78-17/32 [1,995]	72 [1,829]	36 [914]	78-5/32 [1,985]	41-5/8 [1,057]	46-9/16 [1,245]	82-15/16 [2,107]	70-7/32 [1,783]
7IDOD-36GL	90-17/32 [2,299]	36 [914]	46-23/32 [1,187]	54-1/32 [1,372]	63 [1,600]	45-1/4 [1,149]	24 [610]	90-17/32 [2,299]	84 [2,134]	36 [914]	90-5/32 [2,290]	41-5/8 [1,057]	46-9/16 [1,245]	94-15/16 [2,411]	70-7/32 [1,783]
8IDOD-36GL	102-17/32 [2,604]	36 [914]	46-23/32 [1,187]	54-1/32 [1,372]	63 [1,600]	51-1/4 [1,302]	24 [610]	102-17/32 [2,604]	96 [2,438]	36 [914]	102-5/32 [2,595]	41-5/8 [1,057]	46-9/16 [1,245]	106-15/16 [2,716]	70-7/32 [1,783]

PRODUCT LISTING CODES	
US	ANSI Z21.50-2019
CAN	CSA 2.22-2019



Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.



Lakeville, MN Stellar.heatnglo.com
Phone: 888-427-3973 952-224-4072