


HARMAN™
BUILT TO A STANDARD, NOT A PRICE



TL 2.0/TL 2.6
WOOD STOVES



BUILT TO A STANDARD NOT A PRICE

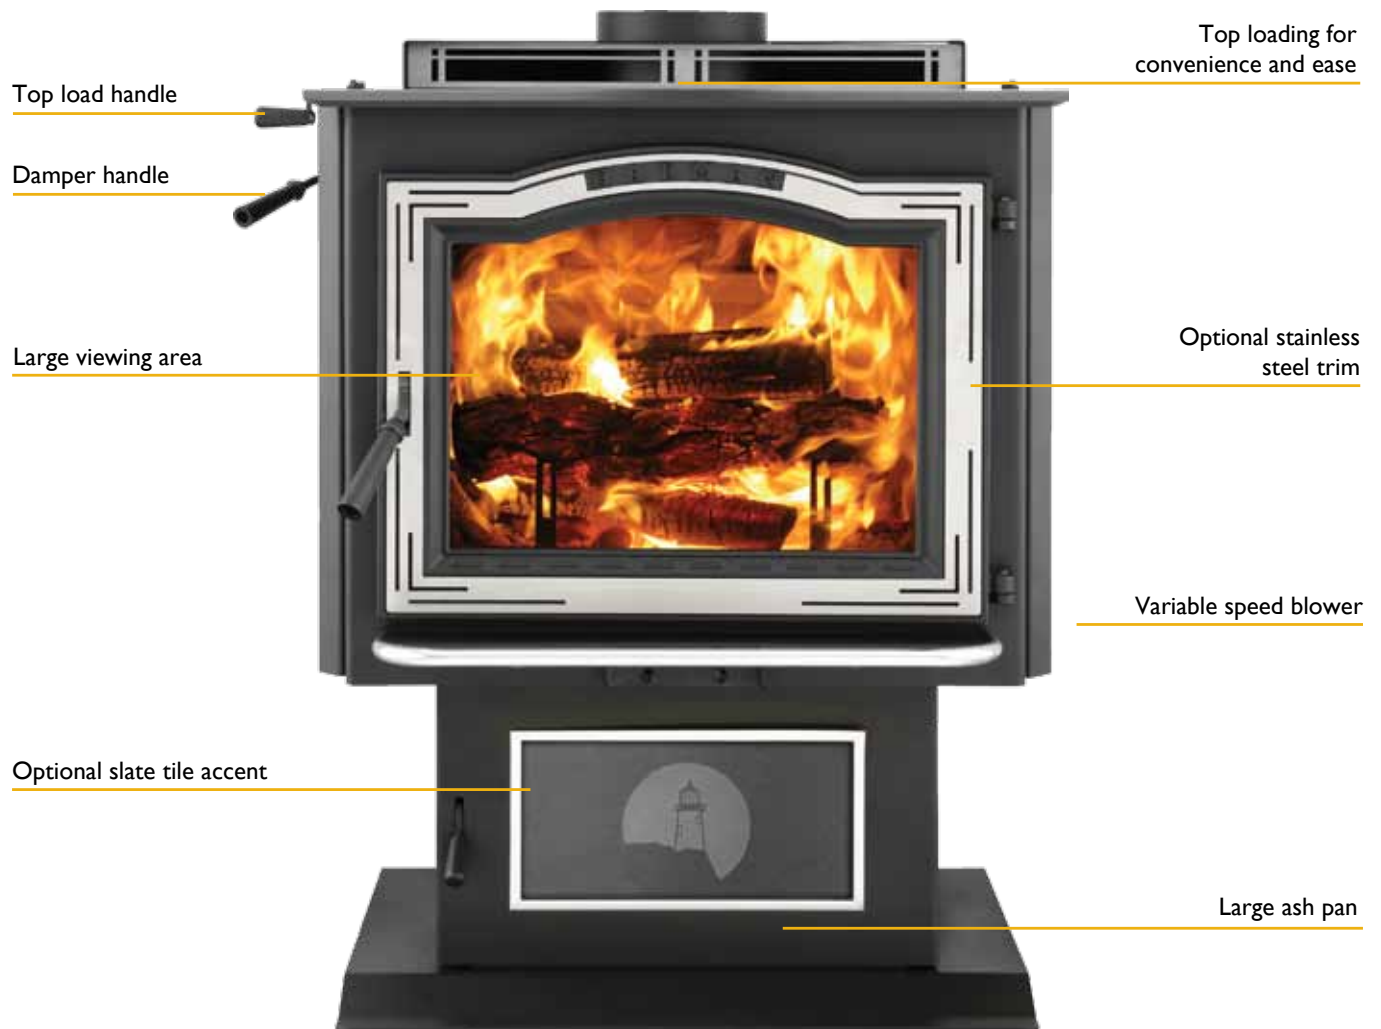

TL 2.0/TL 2.6 WOOD STOVES

The TL 2.0 and 2.6 are practical and efficient options to supplement home heating. Harman FireDome technology helps deliver even heat and long burns—for up to 17 hours of heat from each load of wood. Distinctive features provide unique styling options, or even a cooking grill.

Take advantage of distinctive, powerful and eco-friendly heating. Customize your TL with unique finishing options.

Above & Cover: TL 2.0 shown with optional stainless steel door trim and optional slate tile.
Right: TL 2.6 shown with optional stainless steel door trim and legs.





TL 2.6 shown with optional stainless steel door trim and pedestal base with Horses slate tile.

FEATURES & OPTIONS

Features

- FireDome Plus Combustion System
- Even heat and long burns
- Top-loading for convenience and extended performance
- Large ash pan for less-frequent maintenance



Top Loading



Huge Ash Pan

Options

- TL 2.6 available with pedestal base or legs
- Brushed stainless steel trim
- Cooking grill
- Firescreen
- Slate tile accents
- Blower (150 CFM)



TL 2.6 with pedestal base



TL 2.6 with legs



Optional Cooking Grill



Brushed Stainless Steel Trim



Standard Door Trim

Slate Tile Accents



Deer



Floral




Horses



Lighthouse

Firedome Plus Combustion System

Harman™ FireDome technology maximizes efficiency and extends burn times—for up to 17 hours of even heat with each load of wood. Two combustion cycles completely burn the wood, smoke and exhaust.

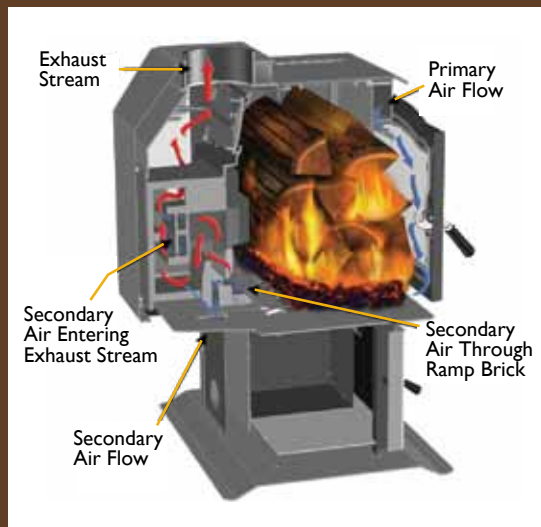

Scan with your smartphone to learn more about the Firedome Combustion System, or visit HarmanStoves.com.






TL 2.0 shown with optional stainless steel door trim and optional slate tile.

SPECIFICATIONS

TL 2.0 WOOD STOVE	BTU/hr Range	Heating Capacity ¹	Log Length	Fuel Type	Flue Size	Blower Size	Ship Weight	Width	Height	Depth
	11,000 - 58,000	1,200 - 3,100 sq. ft.	19" max.	Cord wood	6" top	150 CFM	452 lbs	25.8"	35.3"	26.0"


Dimensions




Clearances

A - Unit to Sidewall	14"
B - Unit to Backwall	13"
C - Chimney Connector to Sidewall	24"
D - Chimney Connector to Backwall	18"
E - Unit to Adjacent Wall	16"
F - Chimney Connector to Adjacent Wall	22.5"


Standard Install



Corner Install




Floor Protection




TL 2.6 WOOD STOVE	BTU/hr Range	Heating Capacity ¹	Log Length	Fuel Type	Flue Size	Blower Size	Ship Weight	Width	Height	Depth
	11,000 - 64,000	1,400 - 3,200 sq. ft.	19" max.	Cord wood	6" top or rear	100 CFM	525 lbs	25.8"	With pedestal - 36.8" With legs - 34.7"	28.6"


Dimensions




Side View (Legs)



Side View (Pedestal)




Top View




Clearances

A - Unit to Sidewall	17"
B - Unit to Backwall	17"
C - Chimney Connector to Sidewall	27"
D - Chimney Connector to Backwall	20"
E - Unit to Adjacent Wall	14.5"
F - Chimney Connector to Adjacent Wall	23"


Standard Install



Corner Install



Floor Protection



YOUR HARMAN DEALER IS:

HARMANTM
BUILT TO A STANDARD. NOT A PRICE

A brand of
Hearth & Home Technologies®

352 MOUNTAIN HOUSE ROAD
HALIFAX, PA 17032
WWW.HARMANSTOVES.COM

facebook.com/HarmanStoves
twitter.com/HarmanStoves
youtube.com/HarmanStoves

LIMITED LIFETIME WARRANTY²

The strongest in the industry, Harman provides a limited lifetime warranty on most important aspects: firebox and heat exchanger.

¹See your local authorized Harman dealer for help in determining the product that best suits your heating needs based on climate and home efficiency.

²For full warranty details, visit www.harmanstoves.com

Actual product appearance, including flame, may differ from image. Tested to: CAN/CSA B366.10-M91, UL 391, ASTM 1509-95, UL C1482-M1990. Product specifications and pricing subject to change without notice. The images and descriptions in this brochure are provided to assist you in product selection only. BTU values based on EPA testing standards. Typically, burning cordwood will result in higher BTU rating depending on moisture content. Refer to installation manual for complete clearance requirements and specifications.

Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.harmanstoves.com/fireplacesafety

HAR-1207U-0812