

&

CRESCENT II

DIRECT VENT GAS FIREPLACE

HEAT & GLO

CRESCENT II

Think creatively. Get inspired. The Crescent II is ideal for smaller spaces. Bring arched elegance to more places with a compact design.

ELEGANTLY COMPACT

Every room deserves a fire. And the Crescent II fits where other fireplaces won't. Specially designed for smaller spaces. Like corners. Bedrooms. Offices. And more.

SKILLFULLY CRAFTED

The arch. A timeless symbol of strength. The Crescent II was designed with the same vigor. Its patented FireBrick® construction has many appeals. Increased efficiency. Intricate detail. And vivid fires.



FRONT OPTIONS



ESSENCE
Available in Bronze

DF-CRES2-BK
Available in Black

ESSENCE FRONT INTERCHANGEABLE DECORATIVE PANELS



WAVERLY



MISSION



CLASSIC

INTELLIFIRE™ IGNITION SYSTEM



The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs.

FIREBRICK® TECHNOLOGY



FireBrick is a patented, energy-saving ceramic material molded into an authentic masonry design. FireBrick produces up to 25% more radiant heat than metal fireboxes—heating rooms faster and using less fuel. This increases efficiency and reduces heating costs.


DIRECT VENT TECHNOLOGY



Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.

CRESCENT II SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HOUR INPUT
	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING		
CRESCENT II	23-1/4 [591]	24-1/2 [622]	4-1/2 [114]	24-1/2 [622]	30-3/4 [781]	37 [940]	15-1/8 [384]	15-3/8 [391]	15-1/2 x 21 [394 x 533]	8,500 - 11,500 (NG)

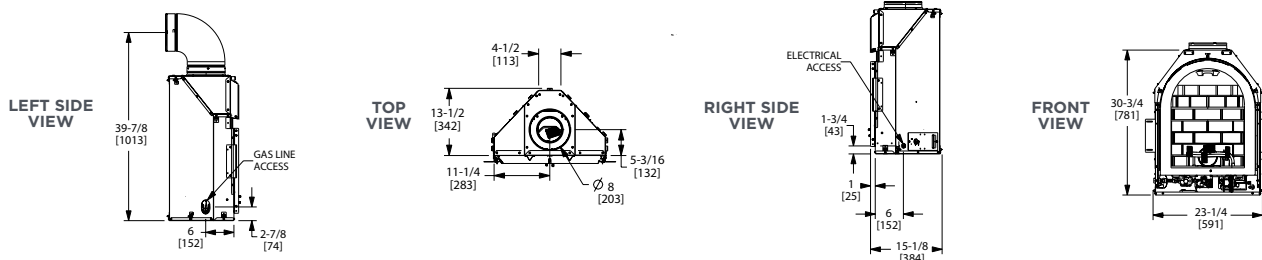

Dimensions above are in inches and millimeters. Reference dimensions only. We recommend measuring individual units at installation. NOTE: Combustible material should not be installed over the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Pictures in this brochure are not a true representation of the fireplace and/or flames.

For complete information on this model, please contact us at:

HEAT & GLO

No one builds a better fire

Web: heatnglo.com
Phone: (888) 427-3973 (952) 985-6000
E-mail: info@heatnglo.com

[facebook.com/HeatandGlo](https://www.facebook.com/HeatandGlo)
twitter.com/HeatandGlo
[youtube.com/HeatandGlo](https://www.youtube.com/HeatandGlo)

HNG-1012U-1117

LIMITED LIFETIME WARRANTY¹

The strongest in the industry, Heat & Glo® provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

¹ For full warranty details, go to www.heatnglo.com.

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplacesafety

