


HARMAN®

BUILT TO A STANDARD, NOT A PRICE

OAKWOOD

WOOD STOVE

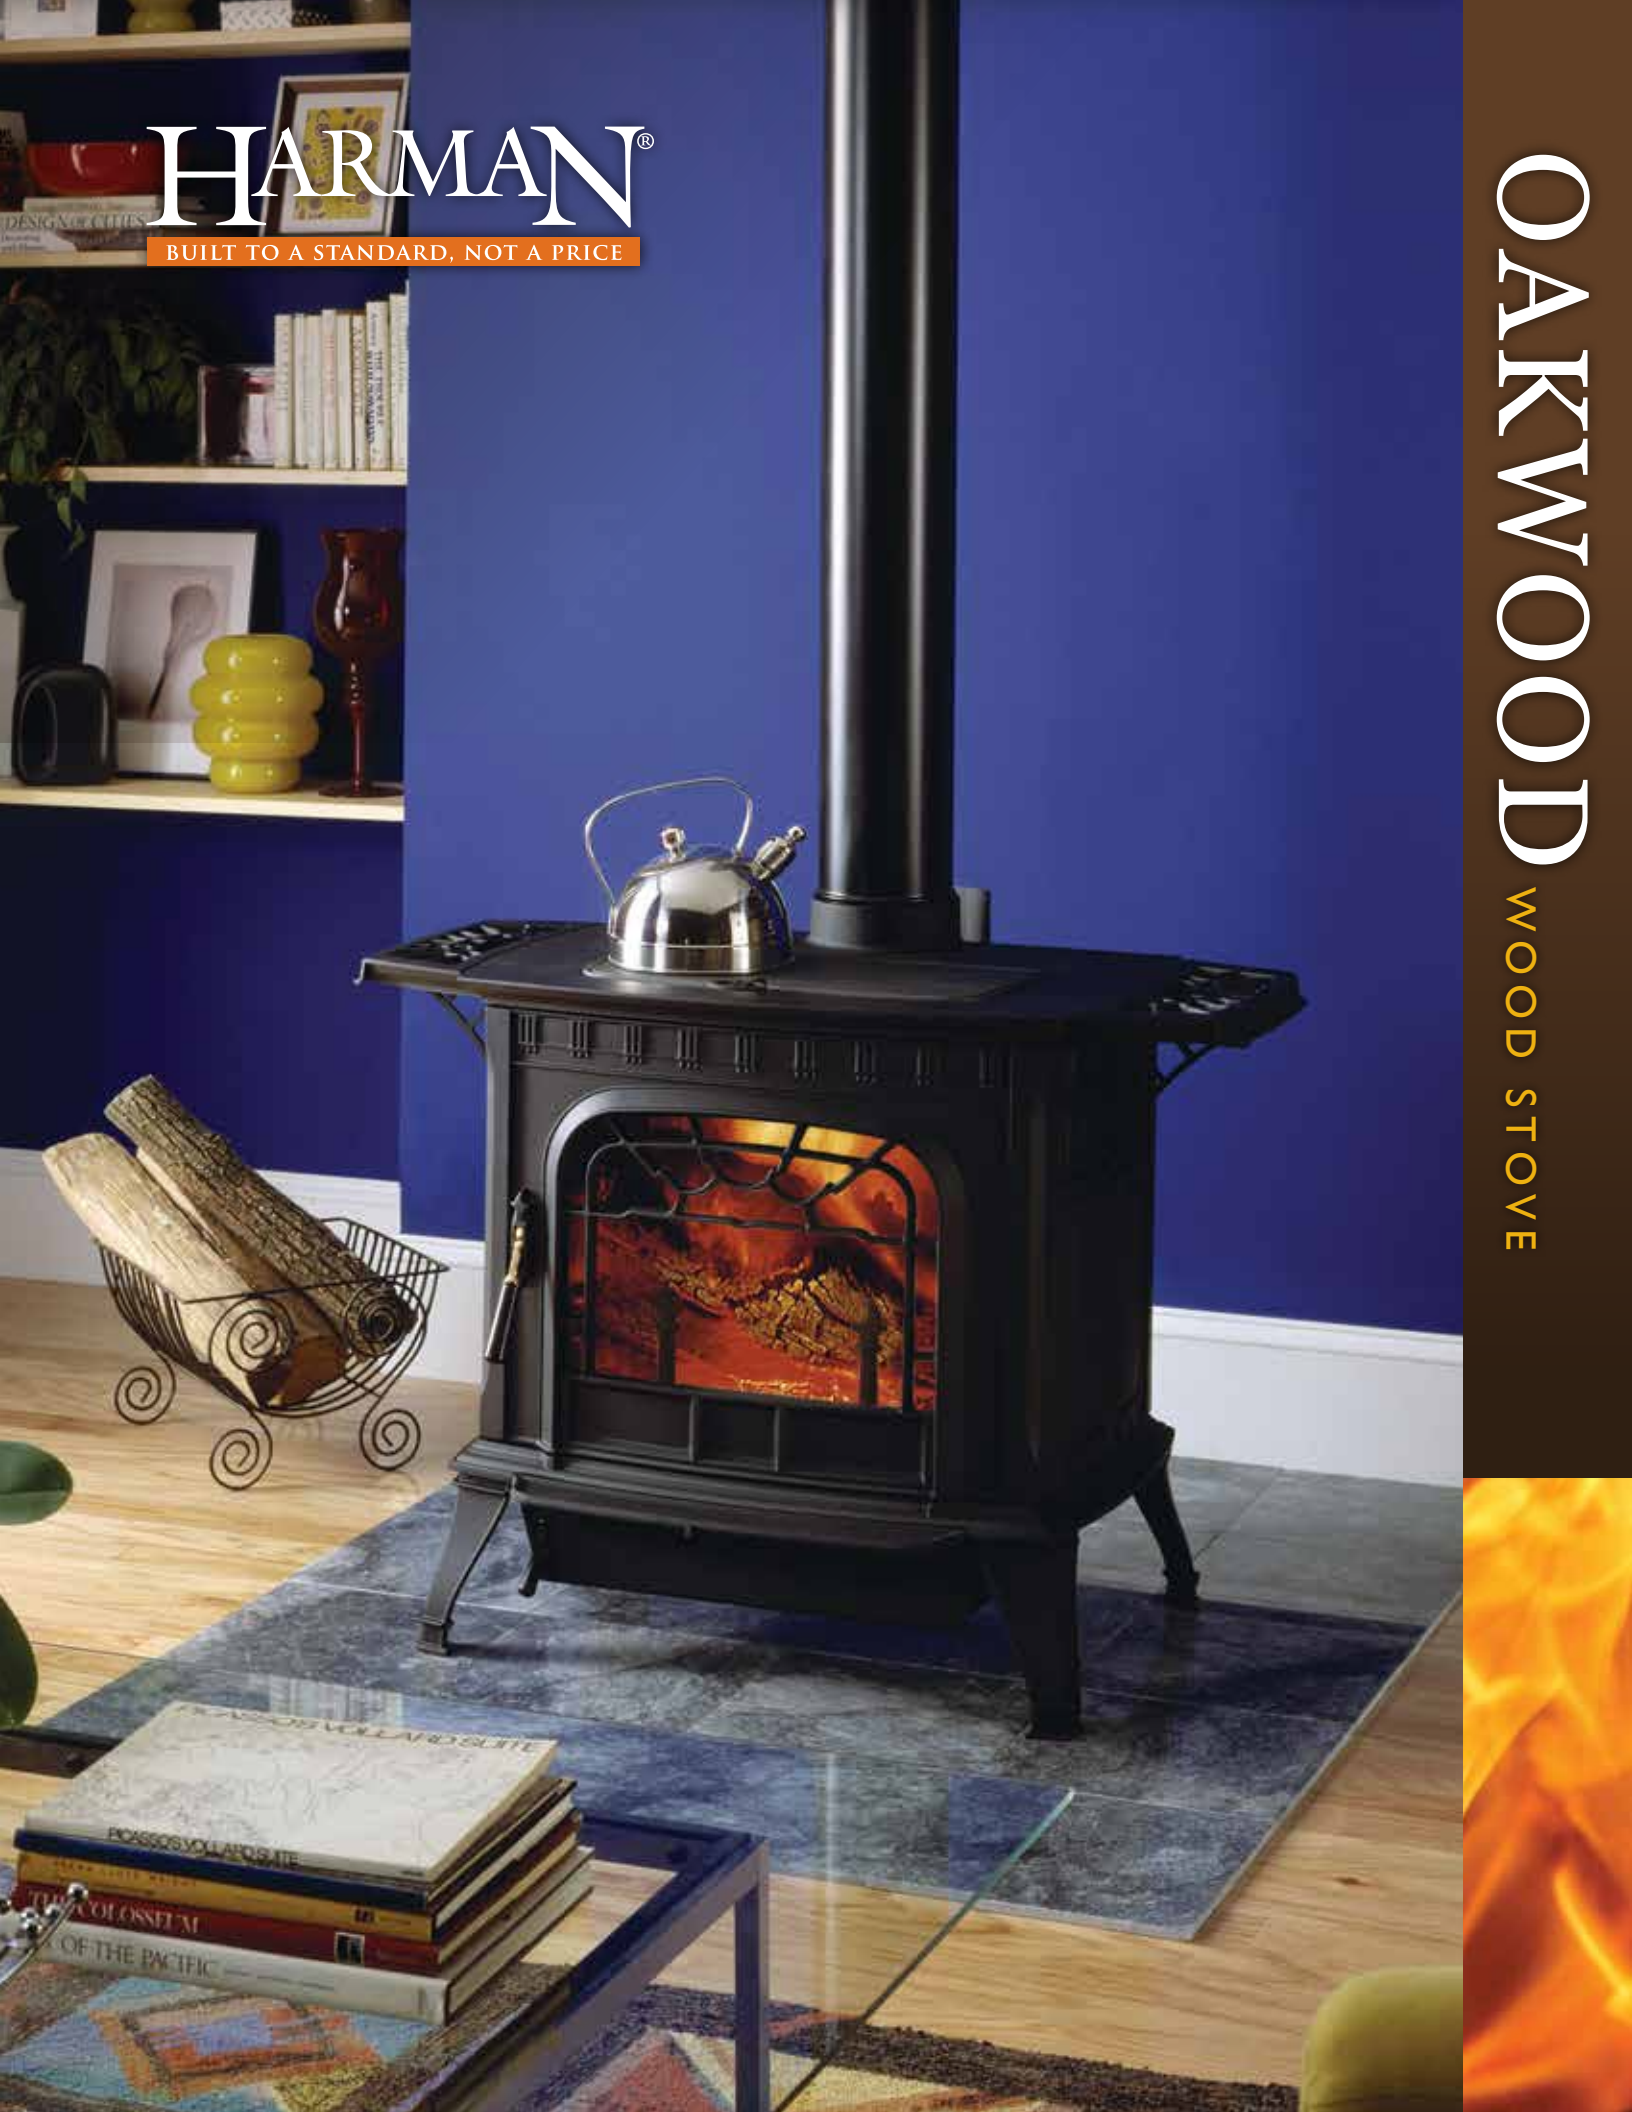


Distinctive Style, Uncompromising Standards

Intricate detail, superb craftsmanship and impressive heat output make the Oakwood a great addition to any space. FireDome technology helps this large stove achieve powerful, even heat—for up to 17 hours from each load of wood.

Distinctive features in the Oakwood offer added utility and ease. A large ash pan with its own door provides easy maintenance and less-frequent cleaning. A top-loading door makes filling the entire 2.3 cu. ft. firebox safer. Top or rear venting options accommodate more spaces and offer installation flexibility.

For even heat, long burns and distinctive style, turn to the Oakwood.

FireDome Technology
delivers even heat
and the longest
burns available.

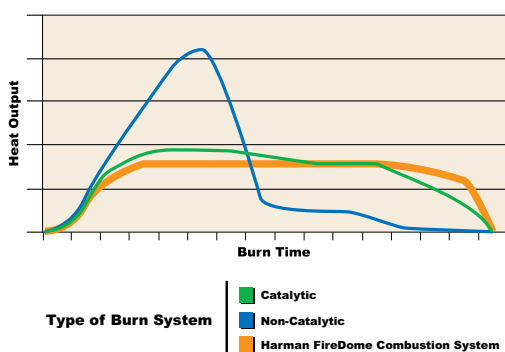

Features

- 42,000 BTUs — heats 1,400 to 3,600 sq. ft.¹
- 2.3 cu. ft. firebox capacity / 21" maximum log length
- Up to 17 hours of steady, even heat from each load of wood
- Top loading for easier loading; larger loads and less mess
- Top or rear venting
- FireDome Technology

Options

- Cooking Grill
- Warming Shelves
- Outside air kit
- Cozy Screen
- Bottom Heat Shield
- Rear Heat Shield



An optional **cooking grill** lets you enjoy a char-grilled meal while heating your home.

FireDome Technology

Harman™ FireDome technology maximizes efficiency and extends burn times—for up to 17 hours of even heat with each load of wood. Two combustion cycles completely burn the wood, smoke and exhaust.


Scan with your smartphone to learn more, or visit HarmanStoves.com.




OAKWOOD WOOD STOVE	BTU/hr Range	Heating Capacity ¹	Fuel Type	Firebox Capacity	Log Length	Average Emissions	Flue Size	Outside Air Size	Ship Weight	Width	Height	Depth
	11,000 - 42,000	1,400 - 3,600 sq. ft.	Wood	2.3 cubic ft.	21" max	2.2 grams/hr; 0.8 grams/hr on low	6"	3" (optional)	480 lbs.	30-1/4"	28-5/8"	29-15/16"

Dimensions


Front View (of Top Vent)




Side View (of Top Vent)



Top View (of Top Vent)




Side View (of Rear Vent)




Clearances to Combustibles

	Single Wall Pipe				Double Wall Pipe			
	With Shield		Without Shield		With Shield		Without Shield	
	Top Vent	Rear Vent	Top Vent	Rear Vent	Top Vent	Rear Vent	Top Vent	Rear Vent
A	19	14	28	28	13	10		
B	23	N/A	32	N/A	17	N/A		
C	38	N/A	38	N/A	34	N/A		
D	26	22	26	26	22	22		
E	16	16	16	16	16	16		
F	22	16	24	24	19	16		

Standard Installation

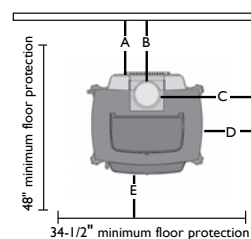

Corner Installation



Cover: Oakwood shown with optional warming shelves.

YOUR HARMAN DEALER IS:

HARMAN
BUILT TO A STANDARD, NOT A PRICE

A brand of
Hearth & Home Technologies®

352 MOUNTAIN HOUSE ROAD
HALIFAX, PA 17032
WWW.HARMANSTOVES.COM

[facebook.com/HarmanStoves](https://www.facebook.com/HarmanStoves)

twitter.com/HarmanStoves

[youtube.com/HarmanStoves](https://www.youtube.com/HarmanStoves)

LIMITED LIFETIME WARRANTY²

The strongest in the industry, Harman provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

¹ See your local authorized Harman dealer for help in determining the product that best suits your heating needs based on climate and home efficiency.

² For full warranty details, visit www.harmanstoves.com

Actual product appearance, including flame, may differ from image. Product specifications and pricing subject to change without notice. Tested to: UL 1482-1996, UL 737-1996 and ULCS-5627-00. EPA Certified.

The images and descriptions in this brochure are provided to assist you in product selection only. Refer to installation manual for complete clearance requirements and specifications. Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.harmanstoves.com/fireplacesafety