

HARMAN®
BUILT TO A STANDARD, NOT A PRICE

TL 300
WOOD STOVE




Head of the Family

The Harman TL 300 is the powerhouse of the TL family. This efficient top loading wood stove uses Harman FireDome technology to deliver even heat and long burns—for up to 18 hours of heat from each load of wood.

Staying warm all season long is easy with the TL 300. A top load door offers safer, easier loading and maximizes the amount of wood in the firebox for longer burns. It uses a single lever handle which seals the top load door in one motion for smokeless loading. The TL 300 can also quickly convert to an open wood-burning fireplace. Distinctive features like custom trim options, a large ash pan, quiet blower and optional cooking grill offer unique style and easy maintenance.

An uncompromising commitment to quality is evident in every Harman stove. Experience a practical and efficient home heating option. Experience the TL 300.

FireDome Technology delivers even heat and the longest burns available.

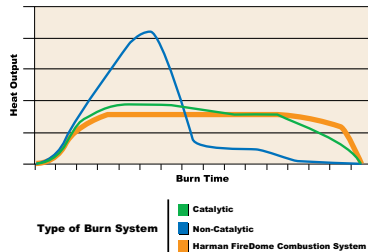

Features

- 75,000 BTUs — heats 1,600 to 4,300 square feet¹
- 3.0 cu. ft. firebox capacity / 20" maximum log length
- Up to 18 hours of steady, even heat from each load of wood
- FireDome Technology
- Top loading for easier loading; larger loads and less mess

Options

- 105 CFM blower
- Cooking grill
- Slate tile accents
- Brushed stainless steel trim
- Fire screen



FireDome Technology

Harman FireDome technology maximizes efficiency and extends burn times—for up to 18 hours of even heat with each load of wood. Two combustion cycles completely burn the wood, smoke and exhaust.




Scan with your smartphone to learn more, or visit HarmanStoves.com.


TL 300 WOOD STOVE	EPA Test Wood BTU Rating*	Cord Wood BTU Rating*	Heating Capacity ¹	Fuel Type	Log Length	Firebox Capacity	Outside Air Size	Weight	Blower Size	Average Emissions	Emissions On Low
	11,200 - 34,500	15,000 - 75,000	1,600 - 4,300 sq. ft.	Wood	18" (20" max)	3 cu. ft.	3" - 4" (optional)	525 lbs.	105 cfm (optional)	1.1 g/	0.8 g/hr

Dimensions


Front View



Side View





Top View





* BTU output varies depending on the type of wood used.

Clearances to Combustibles*



Standard Installation



Corner Installation



Floor Protection



Floor Protection Requirements	Inches	Millimeters
J Sides- USA /CANADA *	8	203
K Front- USA /CANADA *	16	457
L Rear - USA	8	203
L Rear - Canada	Wall	Wall

Floor protector/protection de sol (Min. 51" x 44")

YOUR HARMAN DEALER IS:

HARMAN
BUILT TO A STANDARD, NOT A PRICE

A brand of
Hearth & Home Technologies®

352 MOUNTAIN HOUSE ROAD
HALIFAX, PA 17032
WWW.HARMANSTOVES.COM

[facebook.com/HarmanStoves](https://www.facebook.com/HarmanStoves)

twitter.com/HarmanStoves

[youtube.com/HarmanStoves](https://www.youtube.com/HarmanStoves)

LIMITED LIFETIME WARRANTY²

The strongest in the industry, Harman provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

¹ See your local authorized Harman dealer for help in determining the product that best suits your heating needs based on climate and home efficiency.

² For full warranty details, visit www.harmanstoves.com

Actual product appearance, including flame, may differ from image. Tested to: UL 1482-2010, UL 737-2007, ULC-S627-00, ULC-S628-93. EPA certified. Approved for mobile homes (US only) and shops. Product specifications and pricing subject to change without notice. The images and descriptions in this brochure are provided to assist you in product selection only. BTU values based on EPA testing standards. Typically, burning cordwood will result in higher BTU rating depending on moisture content. Refer to installation manual for complete clearance requirements and specifications. Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.harmanstoves.com/fireplacesafety.

HAR-1203U-1113