
## NO TES: 3 1" C LEA RA NC E TO B-VENT MUST BE MA INTA INED. 8 DIMENSION SHOWN IS ALLOWABLE FINISHING DIMENSION. 9 FIREPLA C E O PTIO NS: COMPONENT LOCATION.

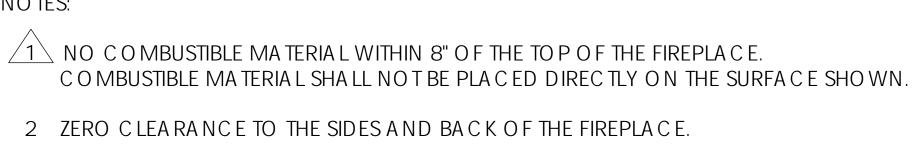

4 GAS PRESSURE LINE: SEE TABLE FOR THE BTU MINIMUM AT 7.0"/11.0" W.C. REQUIRED.  $\overline{\text{NG/LP}}$ 

POWER REQUIREMENT: 120 VAC, 5 AMP MAX DRAW.

5 STEEL 3" SURFACE MAY BE LEFT EXPOSED OR COVERED WITH COMBUSTIBLE FINISHING MATERIAL. FA STENERS SHALL NOT PENETRATE THE 3" SURFACE.

6 COMBUSTIBLE MATERIAL SHALL NOT BE APPLIED TO THIS SURFACE SHOWN ABOVE THE 3" DIMENSION. NON-COMBUSTIBLE MATERIAL MAY BE APPLIED TO SURFACE SHOWN PRIOR TO FINISHING MATERIAL IF FINISHING MATERIAL REQUIRES A STRUCTUAL BACKER.

 $\sqrt{7}$  THE 1/2" C LEARANCE TO COMBUSTIBLES MUST BE MAINTAINED ON THIS SURFACE. IF THE 1/2" STAND OFFS ARE REMOVED, ONLY NON-COMBUSTIBLE MATERIAL SHALL BE INSTALLED AGAINST THIS SURFACE. 1/2" INCH STAND OFFS ARE INCLUDED ON FACE OF FIREPLACE.

FINISHING MATERIAL SHALL NOT OVERLAP DIMENSION SHOWN.

FIREPLACE SHALL HAVE A TRADITIONAL STYLE FLAME WITH OAK LOG SET. FIREPLA C E SHA LL HA V E EMBER BED LIG HTING.


10 THE FIREPLACE WILL COMSUME THE AMOUNT OF **CFM** LISTED IN THE **TABLE**. FIREPLACE SHALL HAVE A SOUND REDUCTION CHAMBER.

TETHERED BOX INCLUDES STANDARD LENGTH 30 FT WIRE HARNESS FOR TETHERED

12 COMBUSTIBLE FURNITURE, CURTAINS AND/OR DECORATIONS ETC. MUST BE A MINIMUM DISTANCE SHOWN FROM OPEN FACE OF FIREPLACE.


13 FIREPLACE WILL BE DESIGNED TO ACCEPT 2" THICK MAXIMUM FIELD INSTALLED FIREPLACE APPROVED, NON-COMBUSTIBLE MATERIAL, PROVIDED BY OTHERS.


5 1/2" C LEARANCE TO COMBUSTIBLES MUST BE MAINTAINED ON THIS SURFACE.

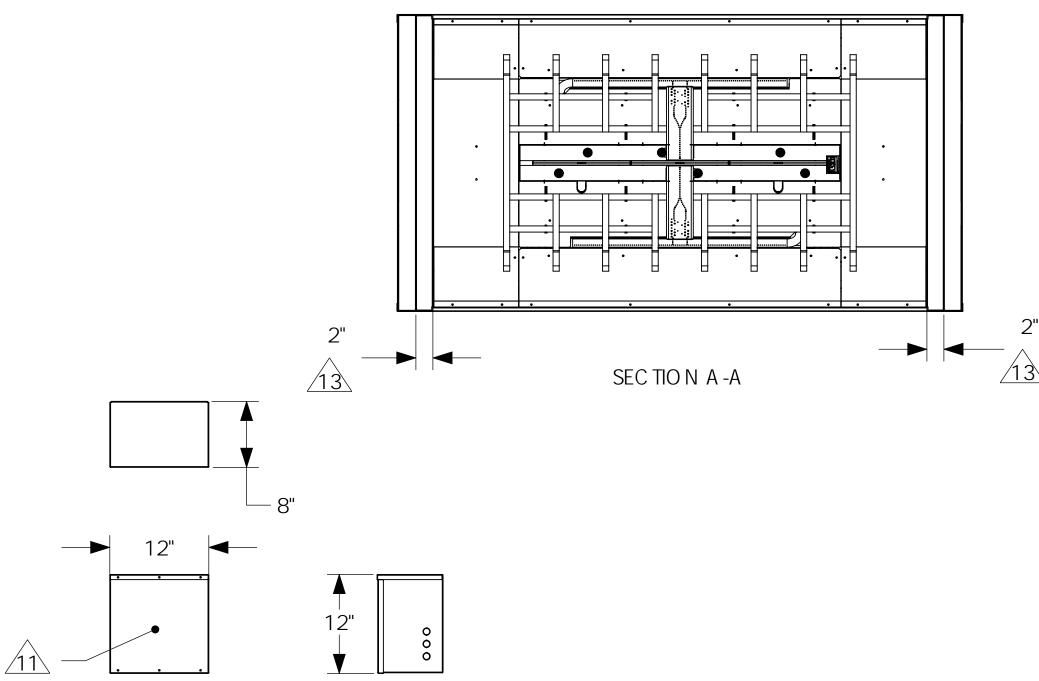


REV	REV ISIO NS	DATE	DRFT	ENG	
01	PRELIMINA RY RELEA SE	5-1-25	WRK	RB	

HE	FLUE SIZE	NG BTU'S	LP BTU'S	CFM					
MODEL NUMBER	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM ∅ "E"	NOTE 4	NOTE 4	NOTE 10	
5-ST-30-TOH	30'	36"	51"	69 25/32'	Ø <b>16</b> "	180,000	162,000	1460	

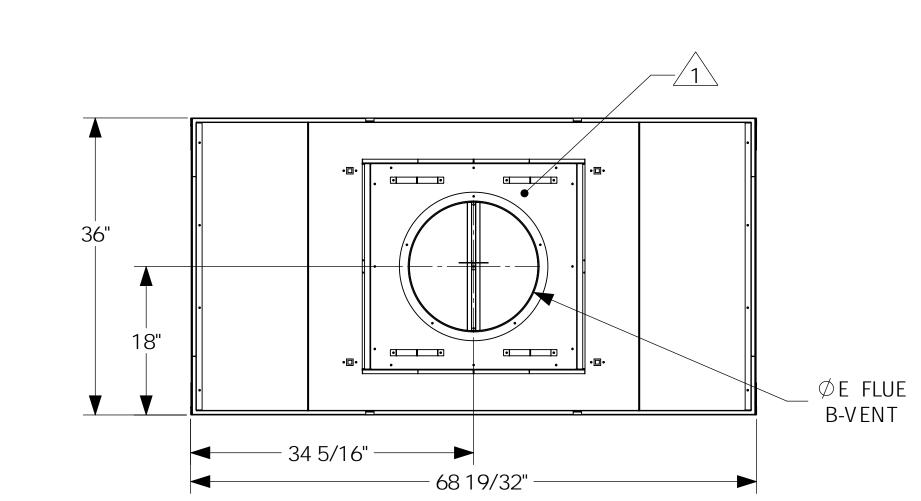

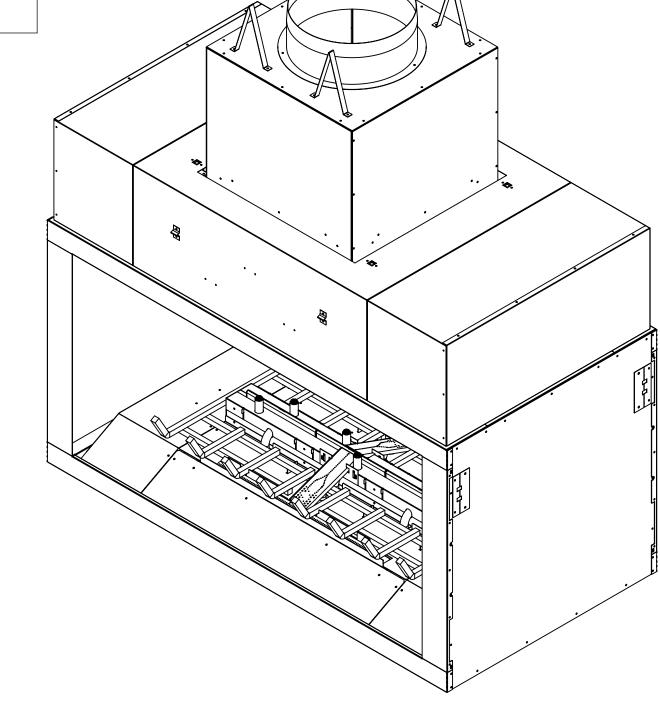

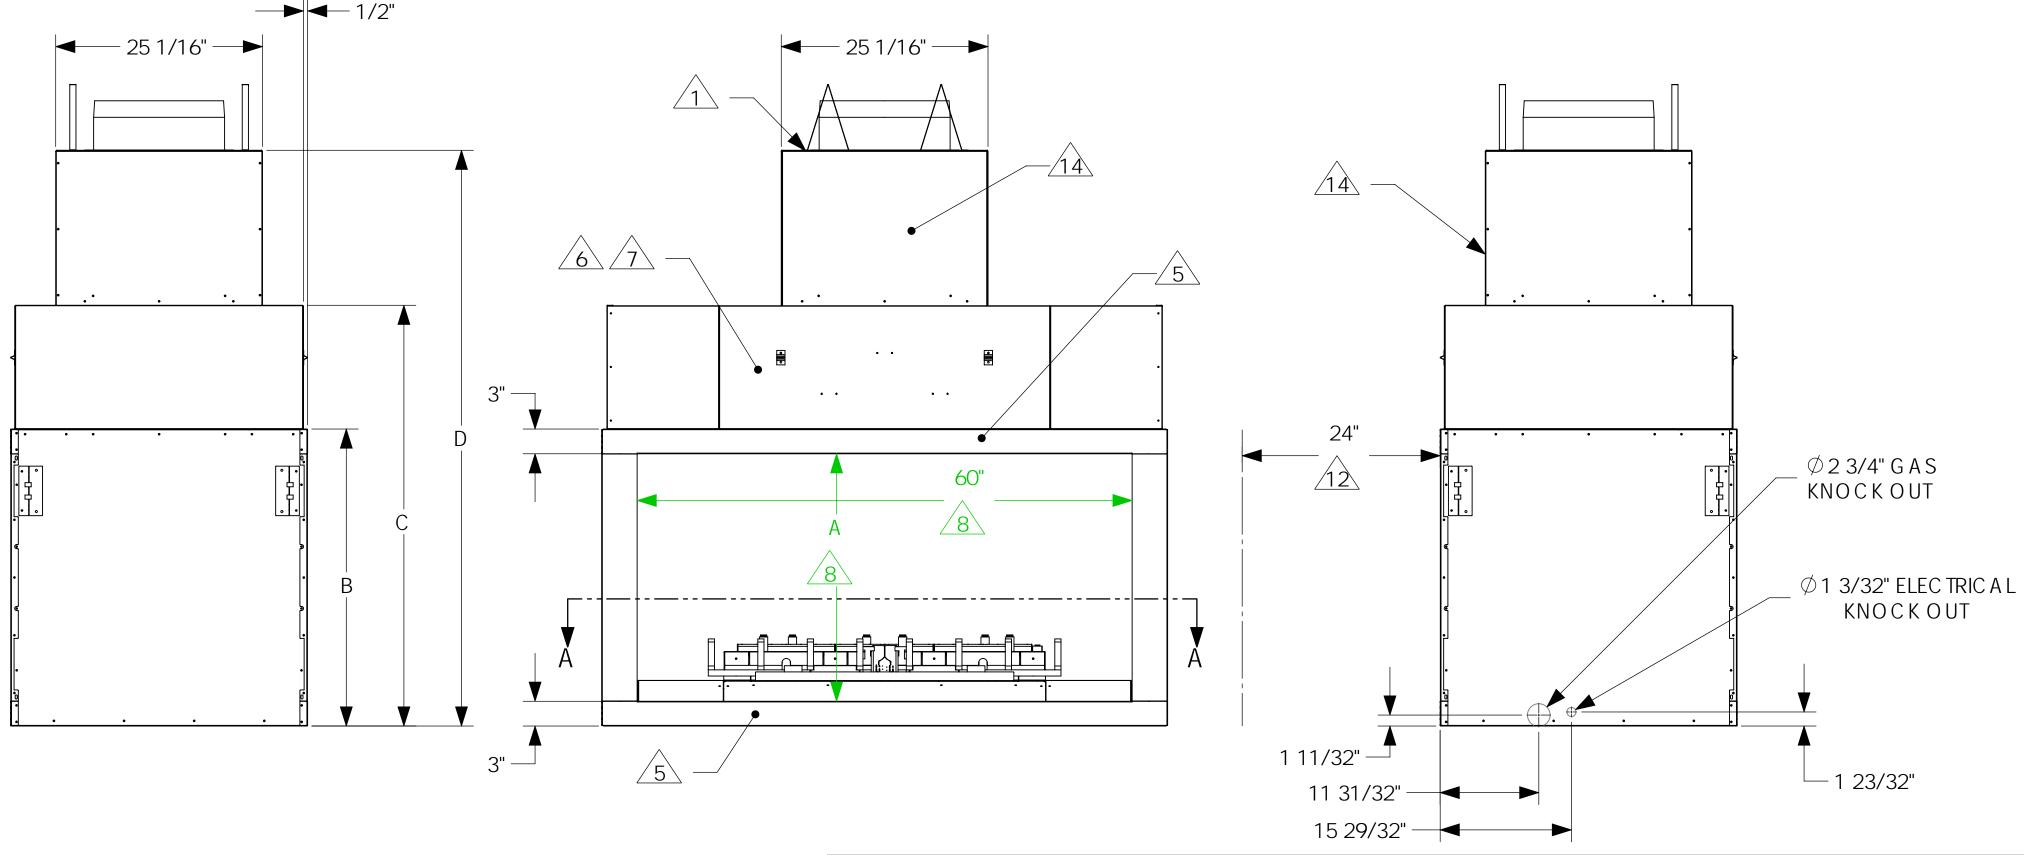


UNLESS O THERWISE SPECIFIED DIMENSIONS ARE IN **INCHES**: TO LERANCE - (1) PLACE DEC: ±0.1 (2) PLACE DEC: ±0.06 (3) PLACE DEC: ±0.031 ANG LE: ±2° FRACTION ±1/16

O UTSIDE MATERIAL. — EDGE OR INSIDE MATERIAL. — O UTSIDE APEX. • INSIDE APEX. - DIMS ENCLOSED BY AN OVALARE CRITICAL DIMENSIONS



4

MO DEL DESCRIPTION: 5' SEE THRU, T	RA DITIC	NAL		
DRAWN BY: W. KUEC HENMEISTER	DATE: 4-28-25	SERIES NA ME:		
ENG INEER: G. BUTLER	SC A LE:	SHEET: SHEET 1 O F 1	DRAWING NUMBER: 5-ST-TO H-SERIES	REV:

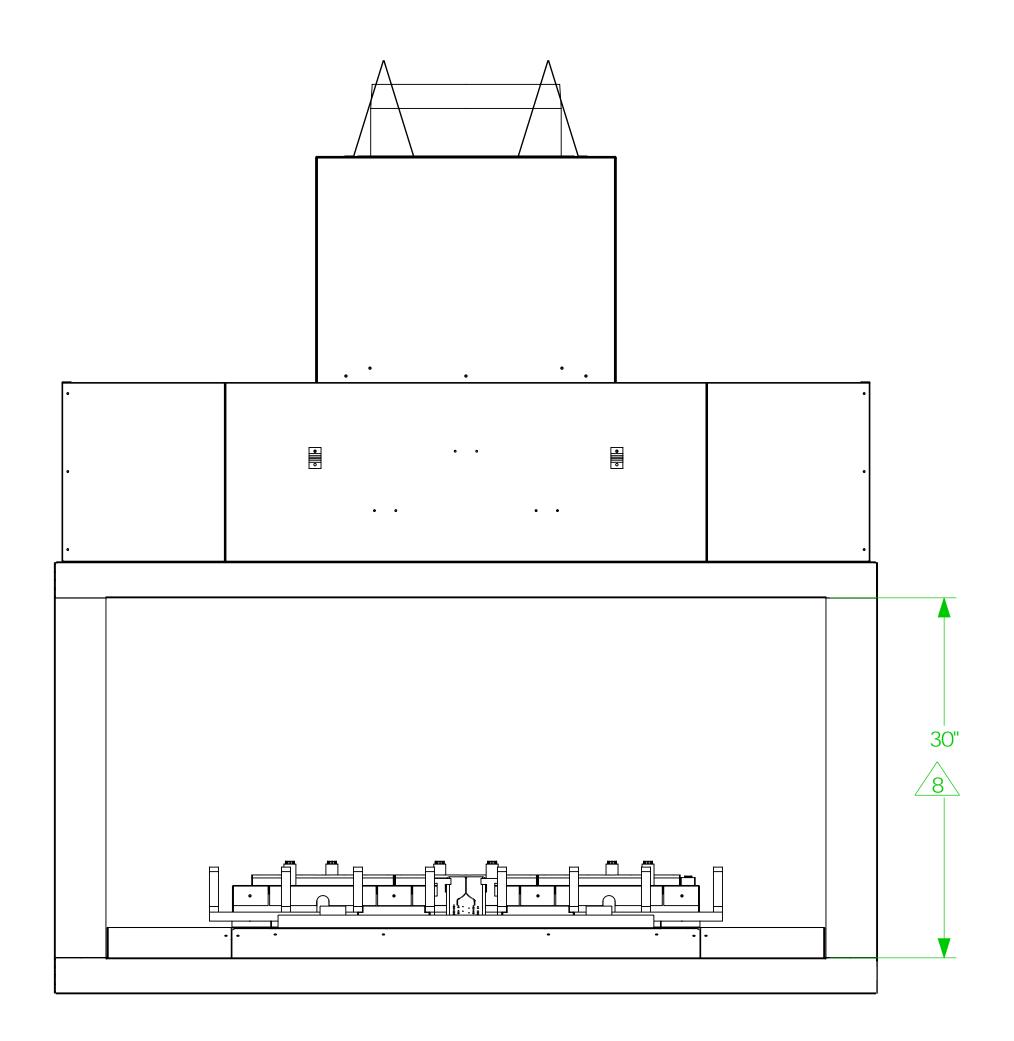

5-ST-30-TO H

4

7

UNLESS O THERWISE SPECIFIED DIMENSIONS A RE IN INCHES. TO LERANCE - (1) PLACE DEC: ±0.1 (2) PLACE DEC: ±0.06 (3) PLACE DEC: ±0.031 ANG LE: ±2° FRACTION ±1/16

O UTSIDE MATERIAL. © EDGE OR INSIDE MATERIAL. OUTSIDE A PEX. • INSIDE A PEX. - DIMS ENCLOSED BY AN OVAL ARE CRITICAL DIMENSIONS

MO DEL DESCRIPTION:

5' SEE THRU, TRADITIONAL

DRAWN BY:

W. KUEC HENMEISTER

DATE:

4-28-25

ENG INEER:

G. BUTLER

SCALE:

N/A

SHEET:

DRAWING NUMBER:

5-ST-TO H-SERIES

O1