
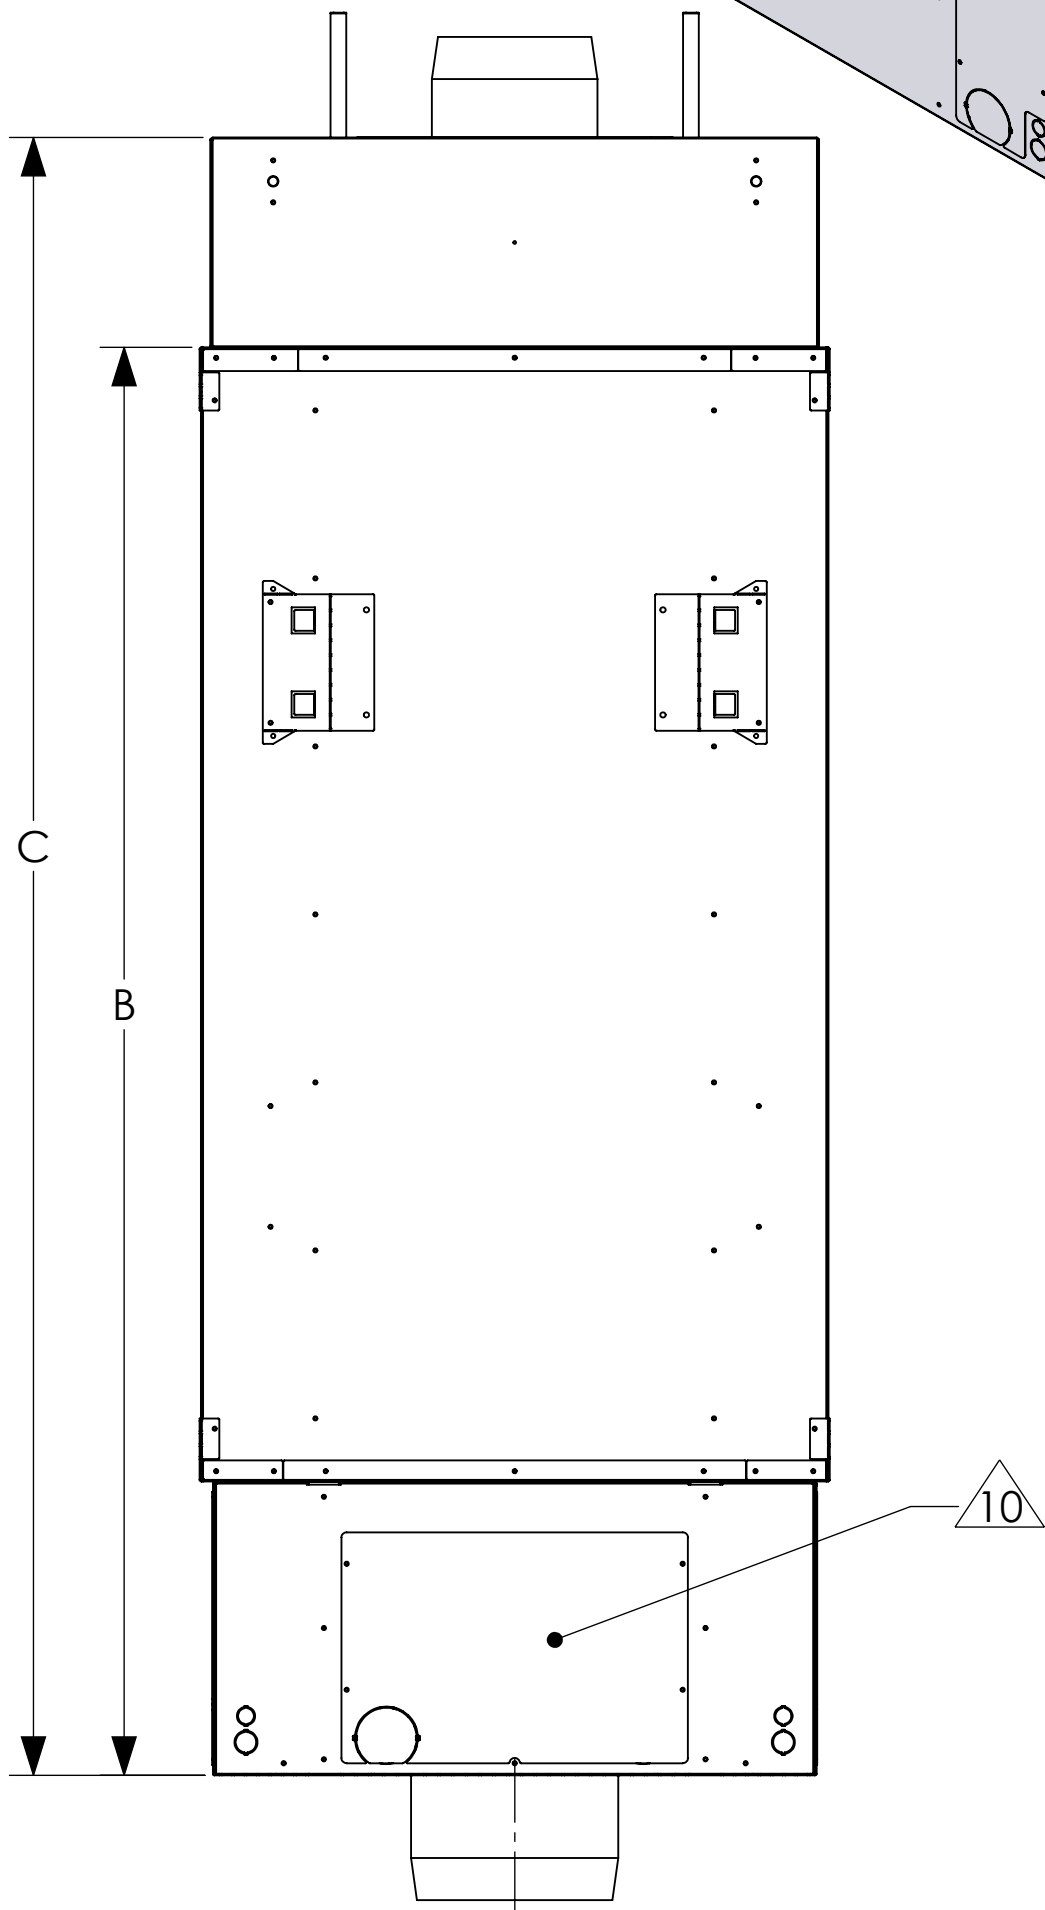
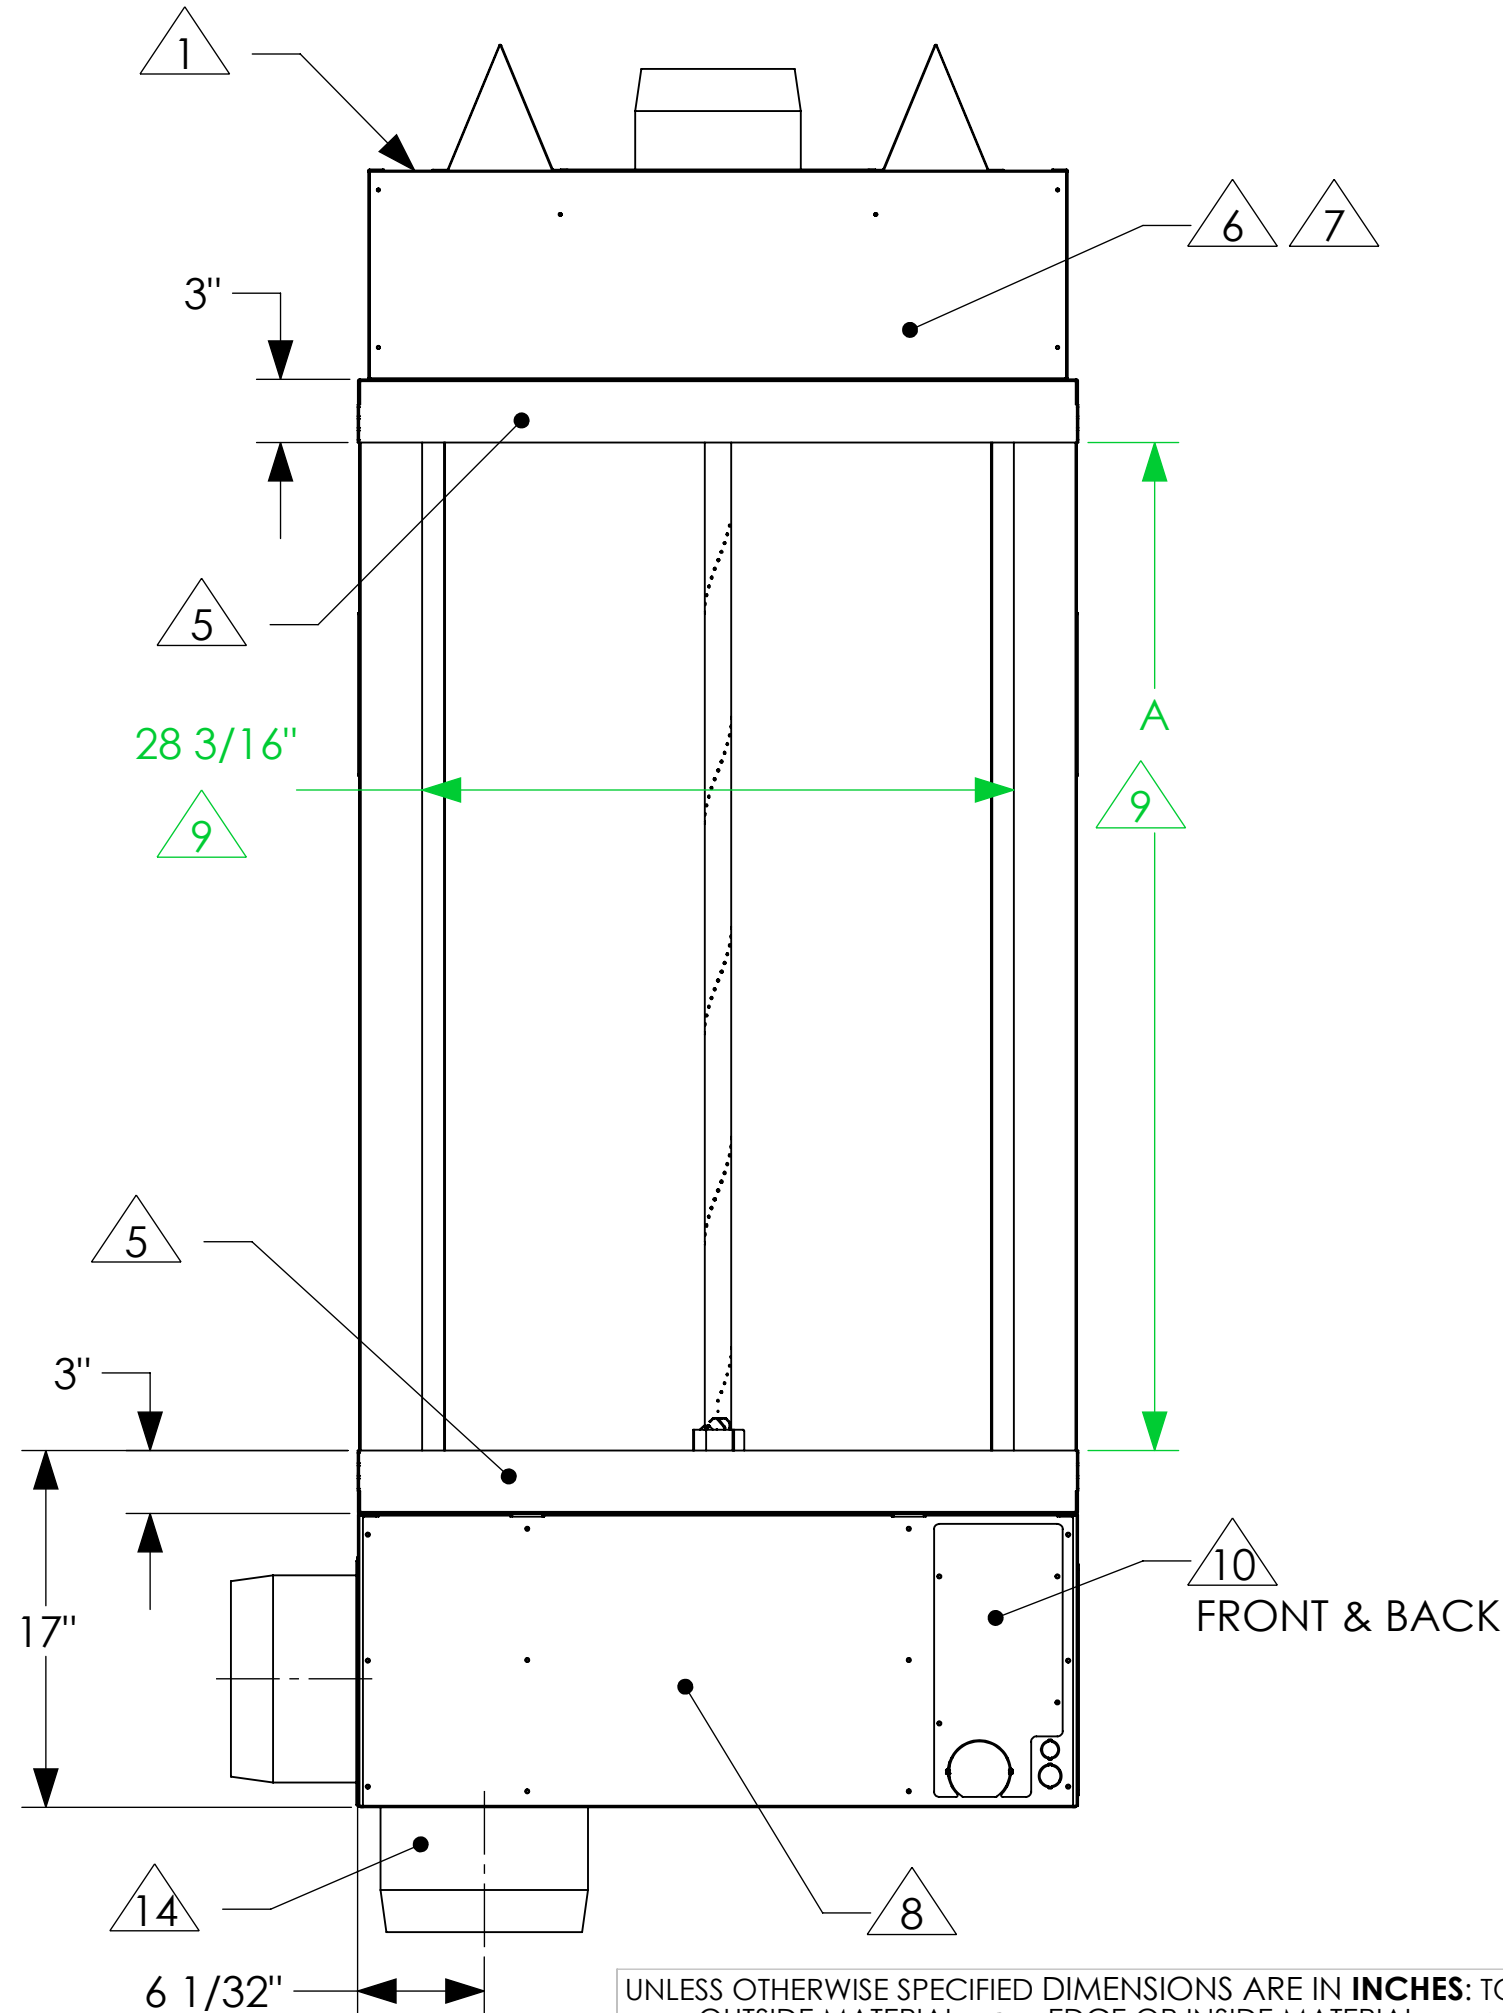
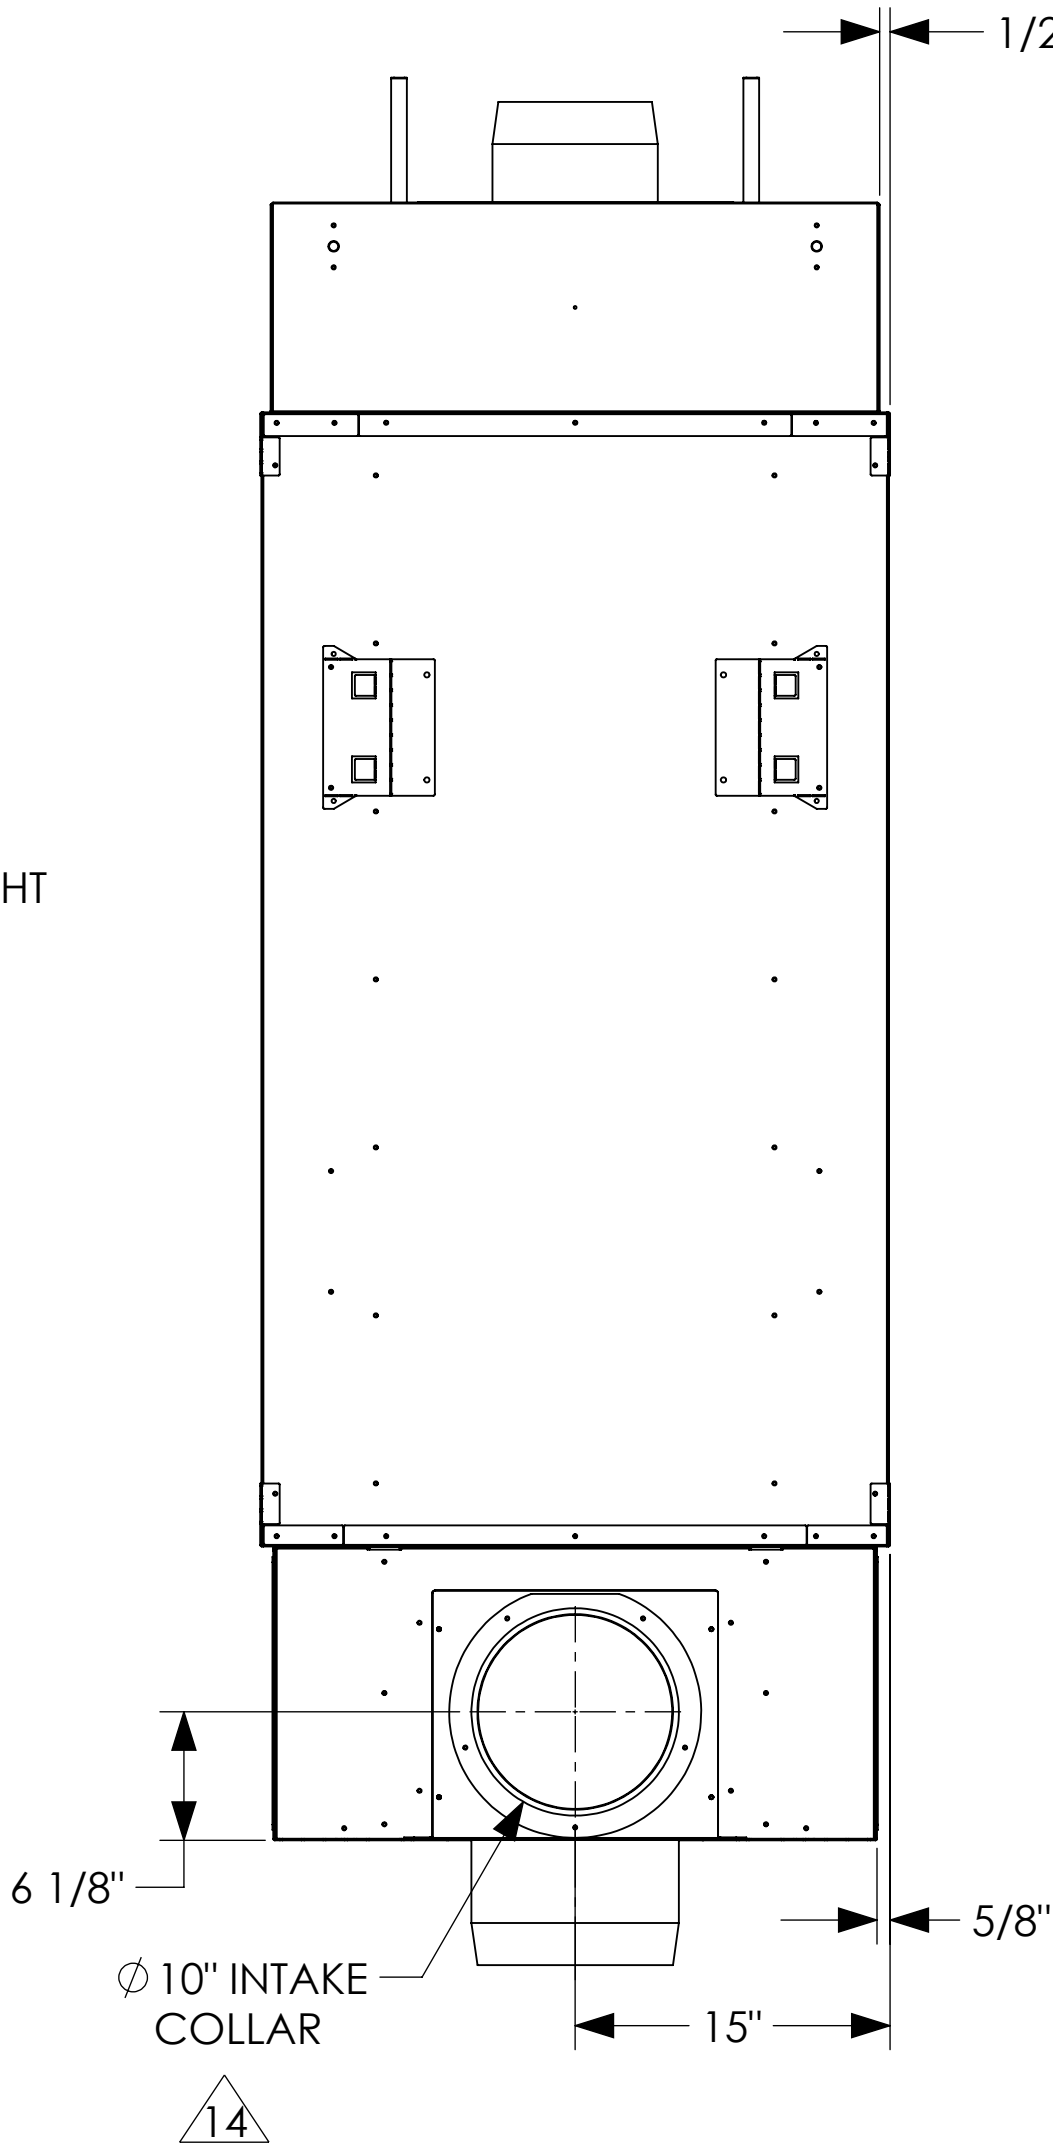
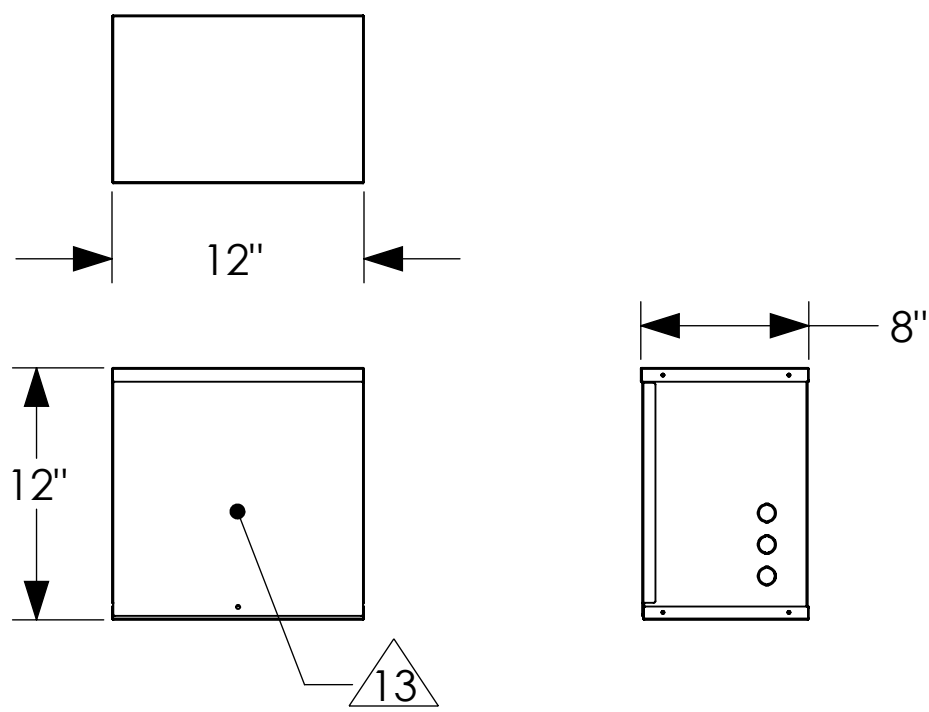
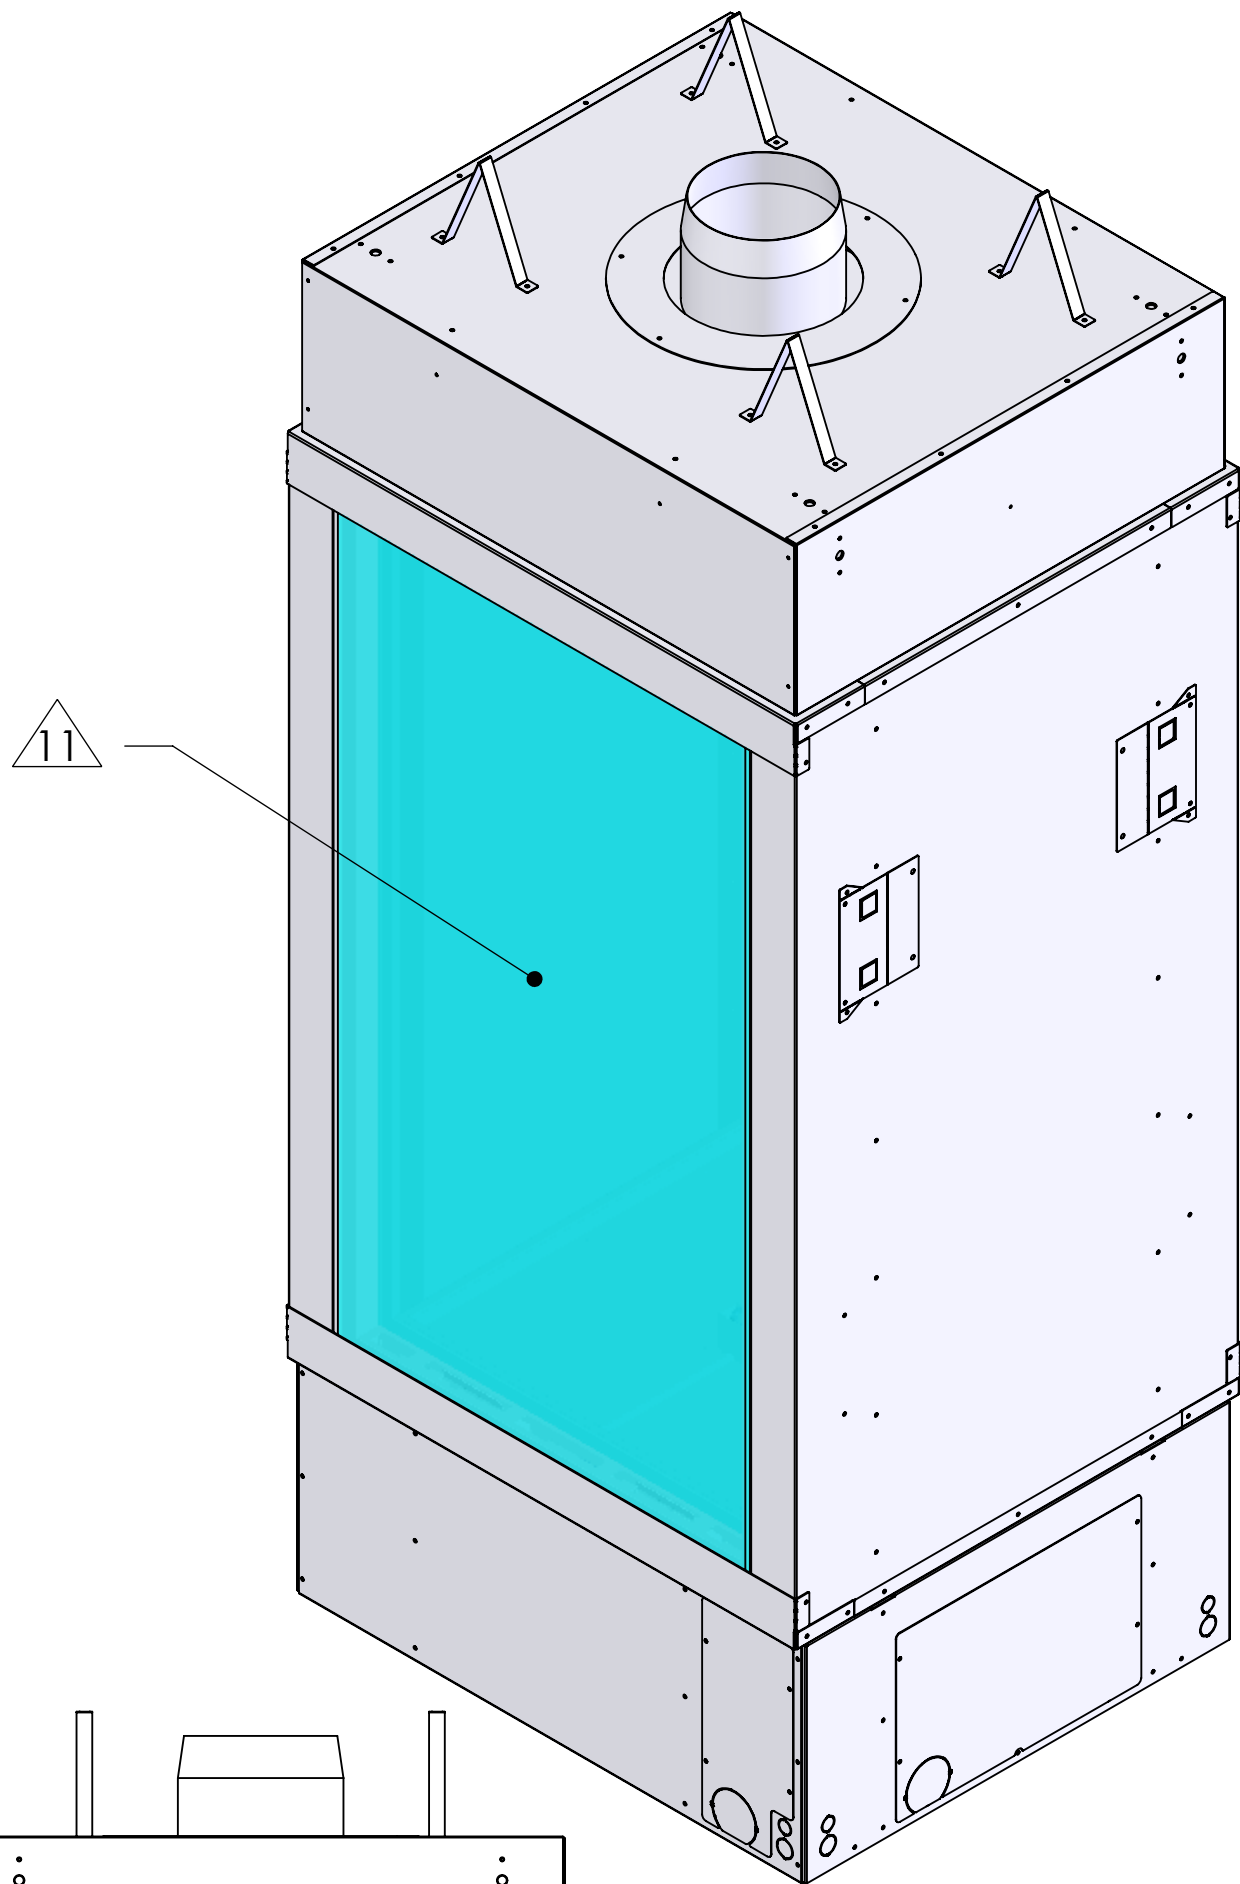


NOTES:

- 1 NO COMBUSTIBLE MATERIAL WITHIN 6" OF THE TOP OF THE FIREPLACE.
COMBUSTIBLE MATERIAL SHALL NOT BE PLACED DIRECTLY ON THE FACE OF THE FIREPLACE, TOP.
- 2 NO COMBUSTIBLE MATERIAL WITHIN 1" OF THE SIDES AND BACK OF THE FIREPLACE.
COMBUSTIBLE MATERIAL SHALL NOT BE PLACED DIRECTLY ON THE FACE OF THE FIREPLACE, BACK AND SIDES.
- 3 1" CLEARANCE TO B-VENT MUST BE MAINTAINED.
- 4 GAS PRESSURE LINE: **SEE TABLE FOR THE BTU** MINIMUM AT 7.0"/11.0" W.C. REQUIRED. **NG/LP**
POWER REQUIREMENT: 120 VAC, 5 AMP MAX DRAW.
- 5 STEEL 3" SURFACE MAY BE LEFT EXPOSED OR COVERED WITH COMBUSTIBLE FINISHING MATERIAL.
FASTENERS SHALL NOT PENETRATE THE 3" SURFACE.
- 6 COMBUSTIBLE MATERIAL SHALL NOT BE APPLIED TO THIS SURFACE SHOWN ABOVE THE 3" DIMENSION.
NON-COMBUSTIBLE MATERIAL MAY BE APPLIED TO SURFACE SHOWN PRIOR TO FINISHING MATERIAL.
IF FINISHING MATERIAL REQUIRES A STRUCTUAL BACKER.
- 7 THE 1/2" CLEARANCE TO COMBUSTIBLES MUST BE MAINTAINED ON THIS SURFACE.
IF THE 1/2" STAND OFFS ARE REMOVED, ONLY NON-COMBUSTIBLE MATERIAL SHALL BE INTALLED AGAINST THIS SURFACE.
1/2" INCH STAND OFFS ARE INCLUDED ON FACE OF FIREPLACE.
- 8 IF STRUCTURAL BACKER IS REQUIRED FOR FINISHING MATERIAL,
COMBUSTIBLE MATERIAL IS ALLOWED IN THE AREA SHOWN BELOW THE 3" DIMENSION.
- 9 **DIMENSION SHOWN IS ALLOWABLE FINISHING DIMENSION. THIS IS THE OPENING SIZE REQUIRED TO FIT THE GLASS PANELS INTO THE FIREPLACE. FINISHING MATERIAL SHALL NOT OVERLAP DIMENSION SHOWN.**
- 10 ACCESS PANELS WILL BE LOCATED IN APPROXIMATE AREAS SHOWN.
GAS AND ELECTRICAL INLETS ARE LOCATED BEHIND THESE PANELS AND WILL BE USED FOR THE INITIAL INSTALL.
THESE PANELS MAY BE USED FOR SERVICE AFTER INSTALLATION IF NOT COVERED.
ACCESS PANELS ARE ALLOWED TO BE FINISHED OVER AS THERE IS ACCESS TO THE GAS AND ELECTRICAL COMPONENTS FROM INSIDE THE FIREPLACE IF SERVICE IS REQUIRED.
- 11 GLASS SHALL NOT BE DIVIDED INTO SECTIONS. GLASS SHALL BE SAFE T TOUCH SYSTEM THAT COMPLIES WITH ANSI STANDARD Z 21.50, MAX TEMPERATURE 172 °F.
GLASS WILL BE 5/16" THICK.
- 12 FIREPLACE OPTIONS:
FIREPLACE SHALL HAVE A SPIRAL BURNER UP THE VERTICAL AXES OF THE FIREPLACE.
FIREPLACE SHALL HAVE MEDIA BED LIGHTING.
- 13 TETHERED BOX INCLUDES 30 FT WIRE HARNESS FOR TETHERED COMPONENT LOCATION.
- 14 INTAKE COLLAR CAN BE ROTATED TO VENT OFF THE SIDE, OR FROM THE BOTTOM OF THE FIREPLACE.
- 15 MODEL # 6-ST-GL-SP & 7-ST-GL-SP WILL BE SHIPPED ON THEIR SIDES, UNIT WILL NEED TO BE TIPPED UPRIGHT IN THE FIELD.

	HEIGHT OPTIONS PER MODEL			FLUE SIZE	NG BTU'S	LP BTU'S
MODEL NUMBER	DIM "A"	DIM "B"	DIM "C"	DIM "D"	NOTE 4	NOTE 4
4-ST-GL-SP	48"	68"	78"	Ø 8"	64,000	60,000
5-ST-GL-SP	60"	80"	90"	Ø 8"	80,000	74,000
6-ST-GL-SP	72"	92"	102"	Ø 10"	100,000	94,000
7-ST-GL-SP	84"	104"	114"	Ø 10"	120,000	114,000

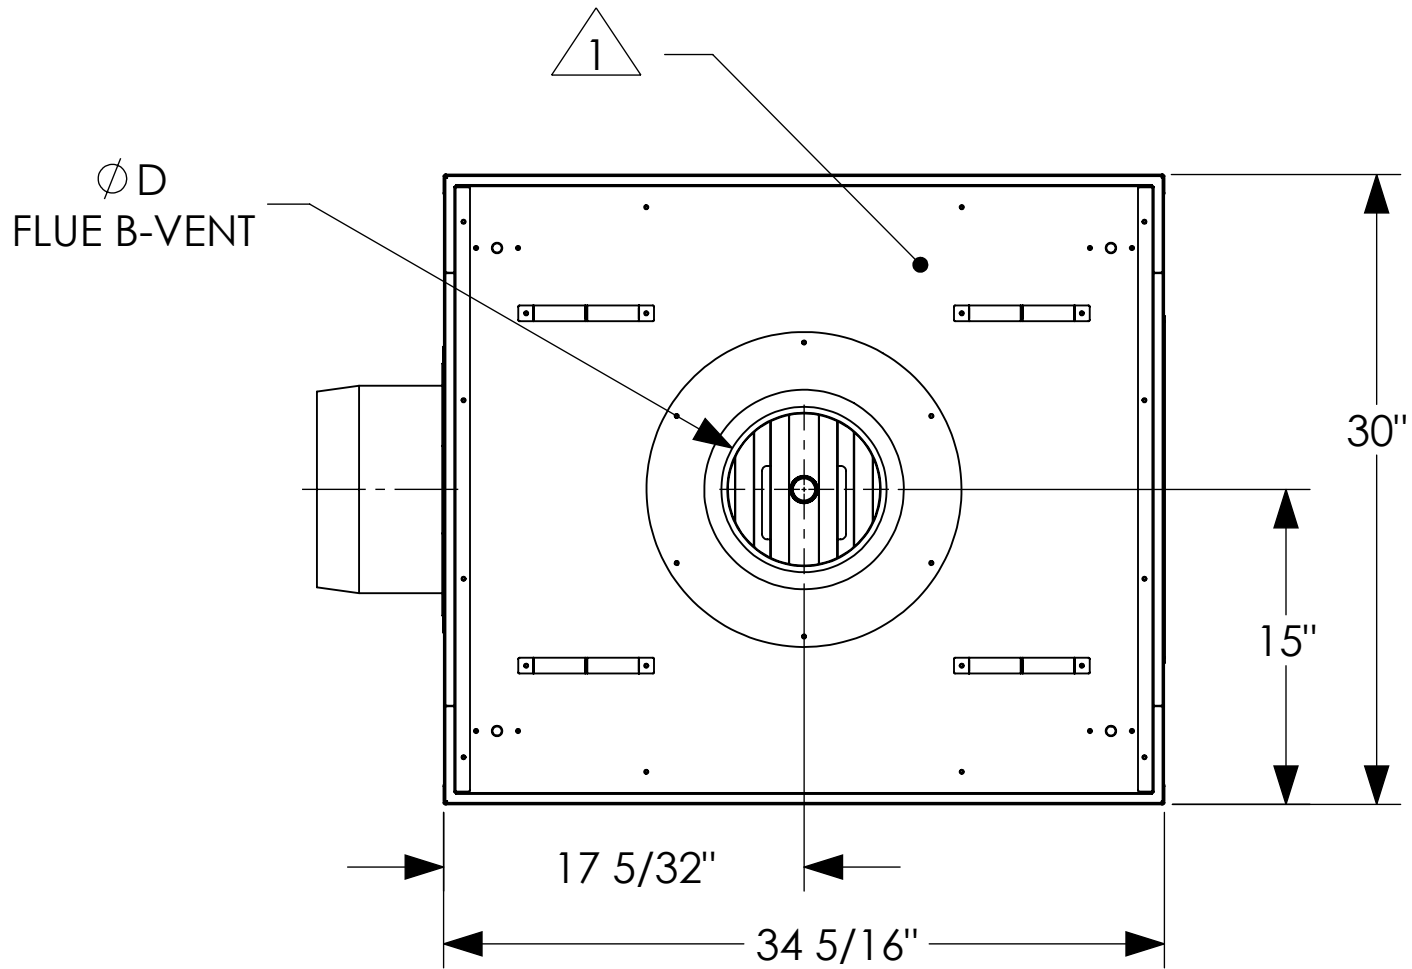

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN **INCHES**: TOLERANCE - (1) PLACE DEC: ±0.1 (2) PLACE DEC: ±0.06 (3) PLACE DEC: ±0.031 ANGLE: ±2° FRACTION ±1/16
◄ OUTSIDE MATERIAL. ○ EDGE OR INSIDE MATERIAL. ◄ OUTSIDE APEX. ● INSIDE APEX. - DIMS ENCLOSED BY AN OVAL ARE CRITICAL DIMENSIONS






STELLAR
by Heat & Glo

DRAWING AND DESIGN IS PROPERTY OF HEARTH & HOME TECHNOLOGIES

MODEL DESCRIPTION: **SPIRAL, SEE THRU**

DRAWN BY: M.LEET	DATE: 1-14-25	SERIES NAME: SPIRAL
ENGINEER: R.BERG	SCALE: N/A	SHEET: SHEET 1 OF 3
		STYLE: SPIRAL-ST-SERIES
		REV: 1

REV	REVISIONS	DATE	DRFT	ENG
1	PRELIMINARY RELEASE	1-14-25	ML	RB

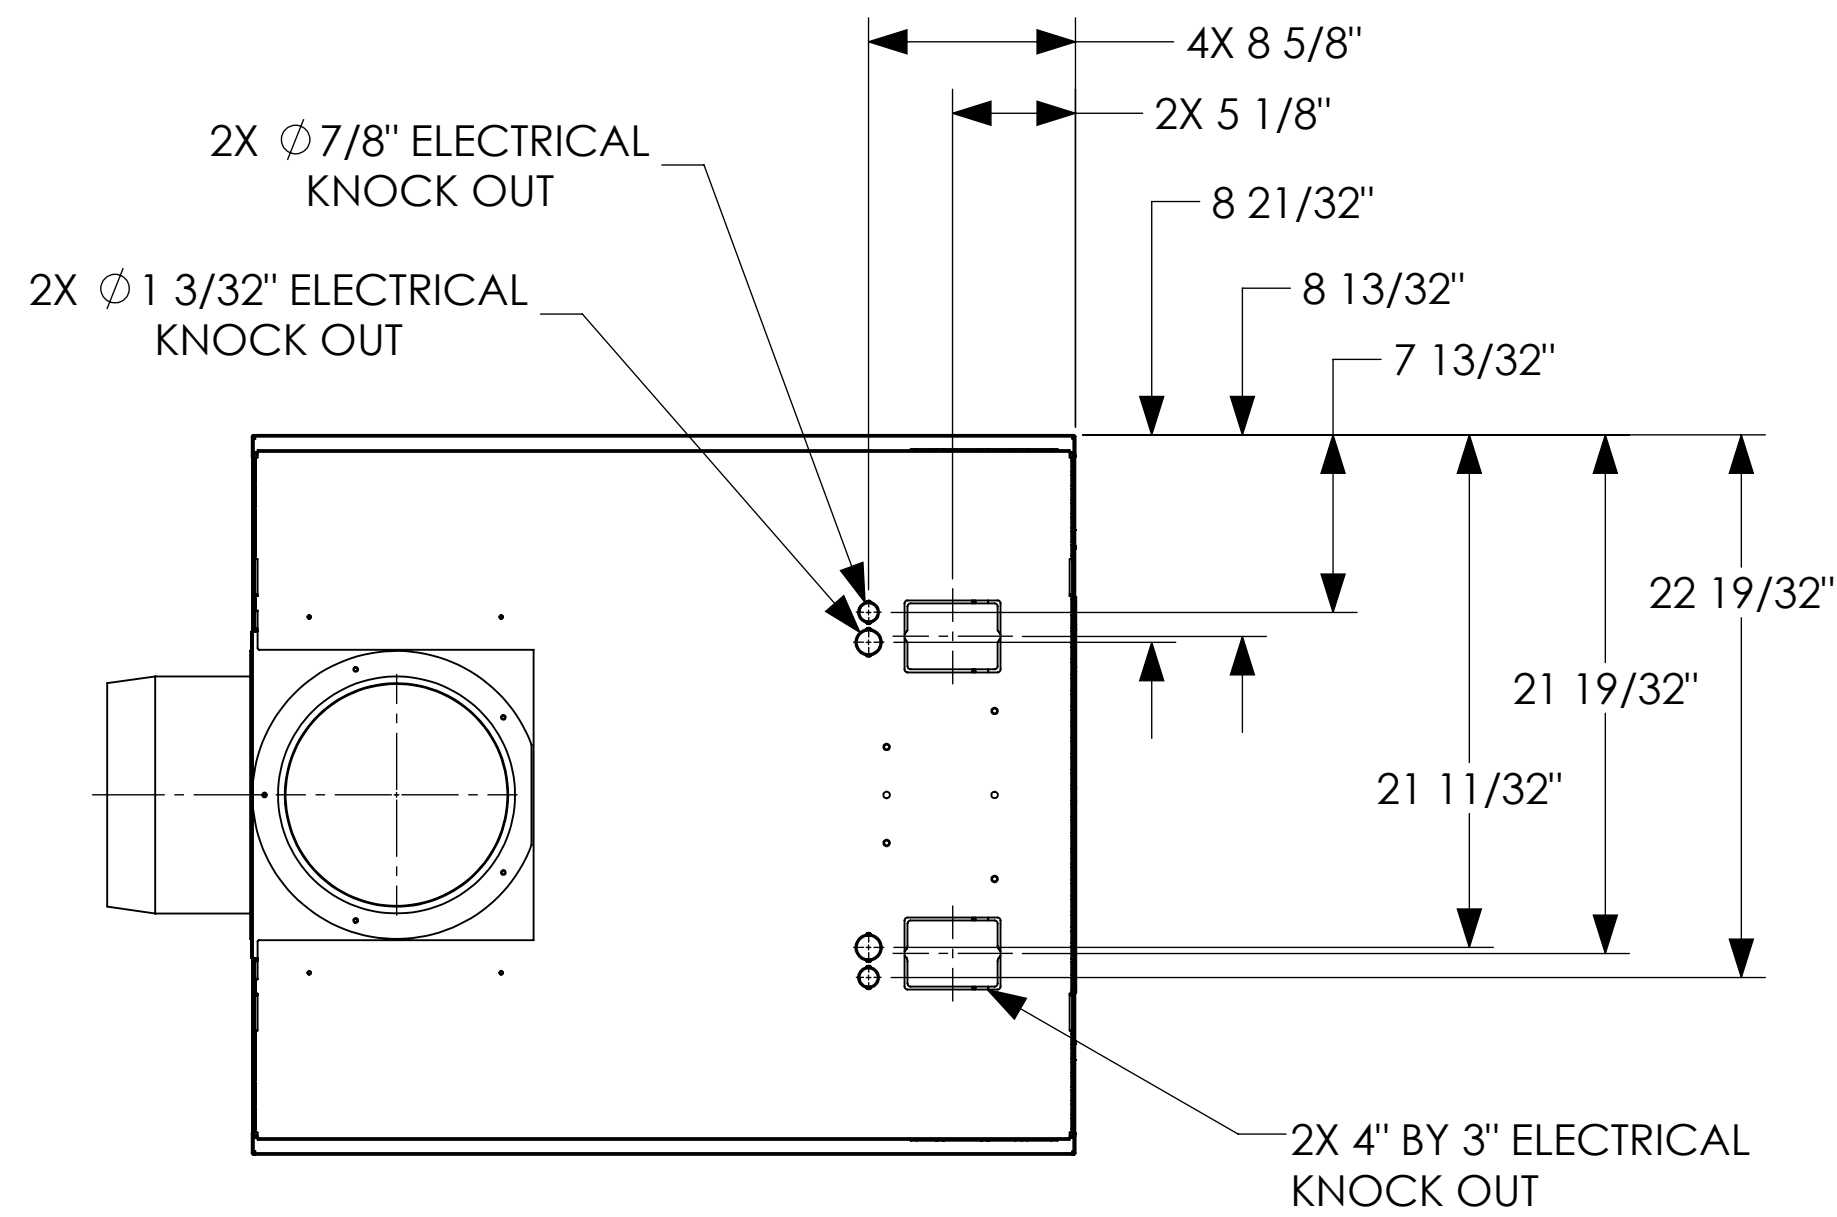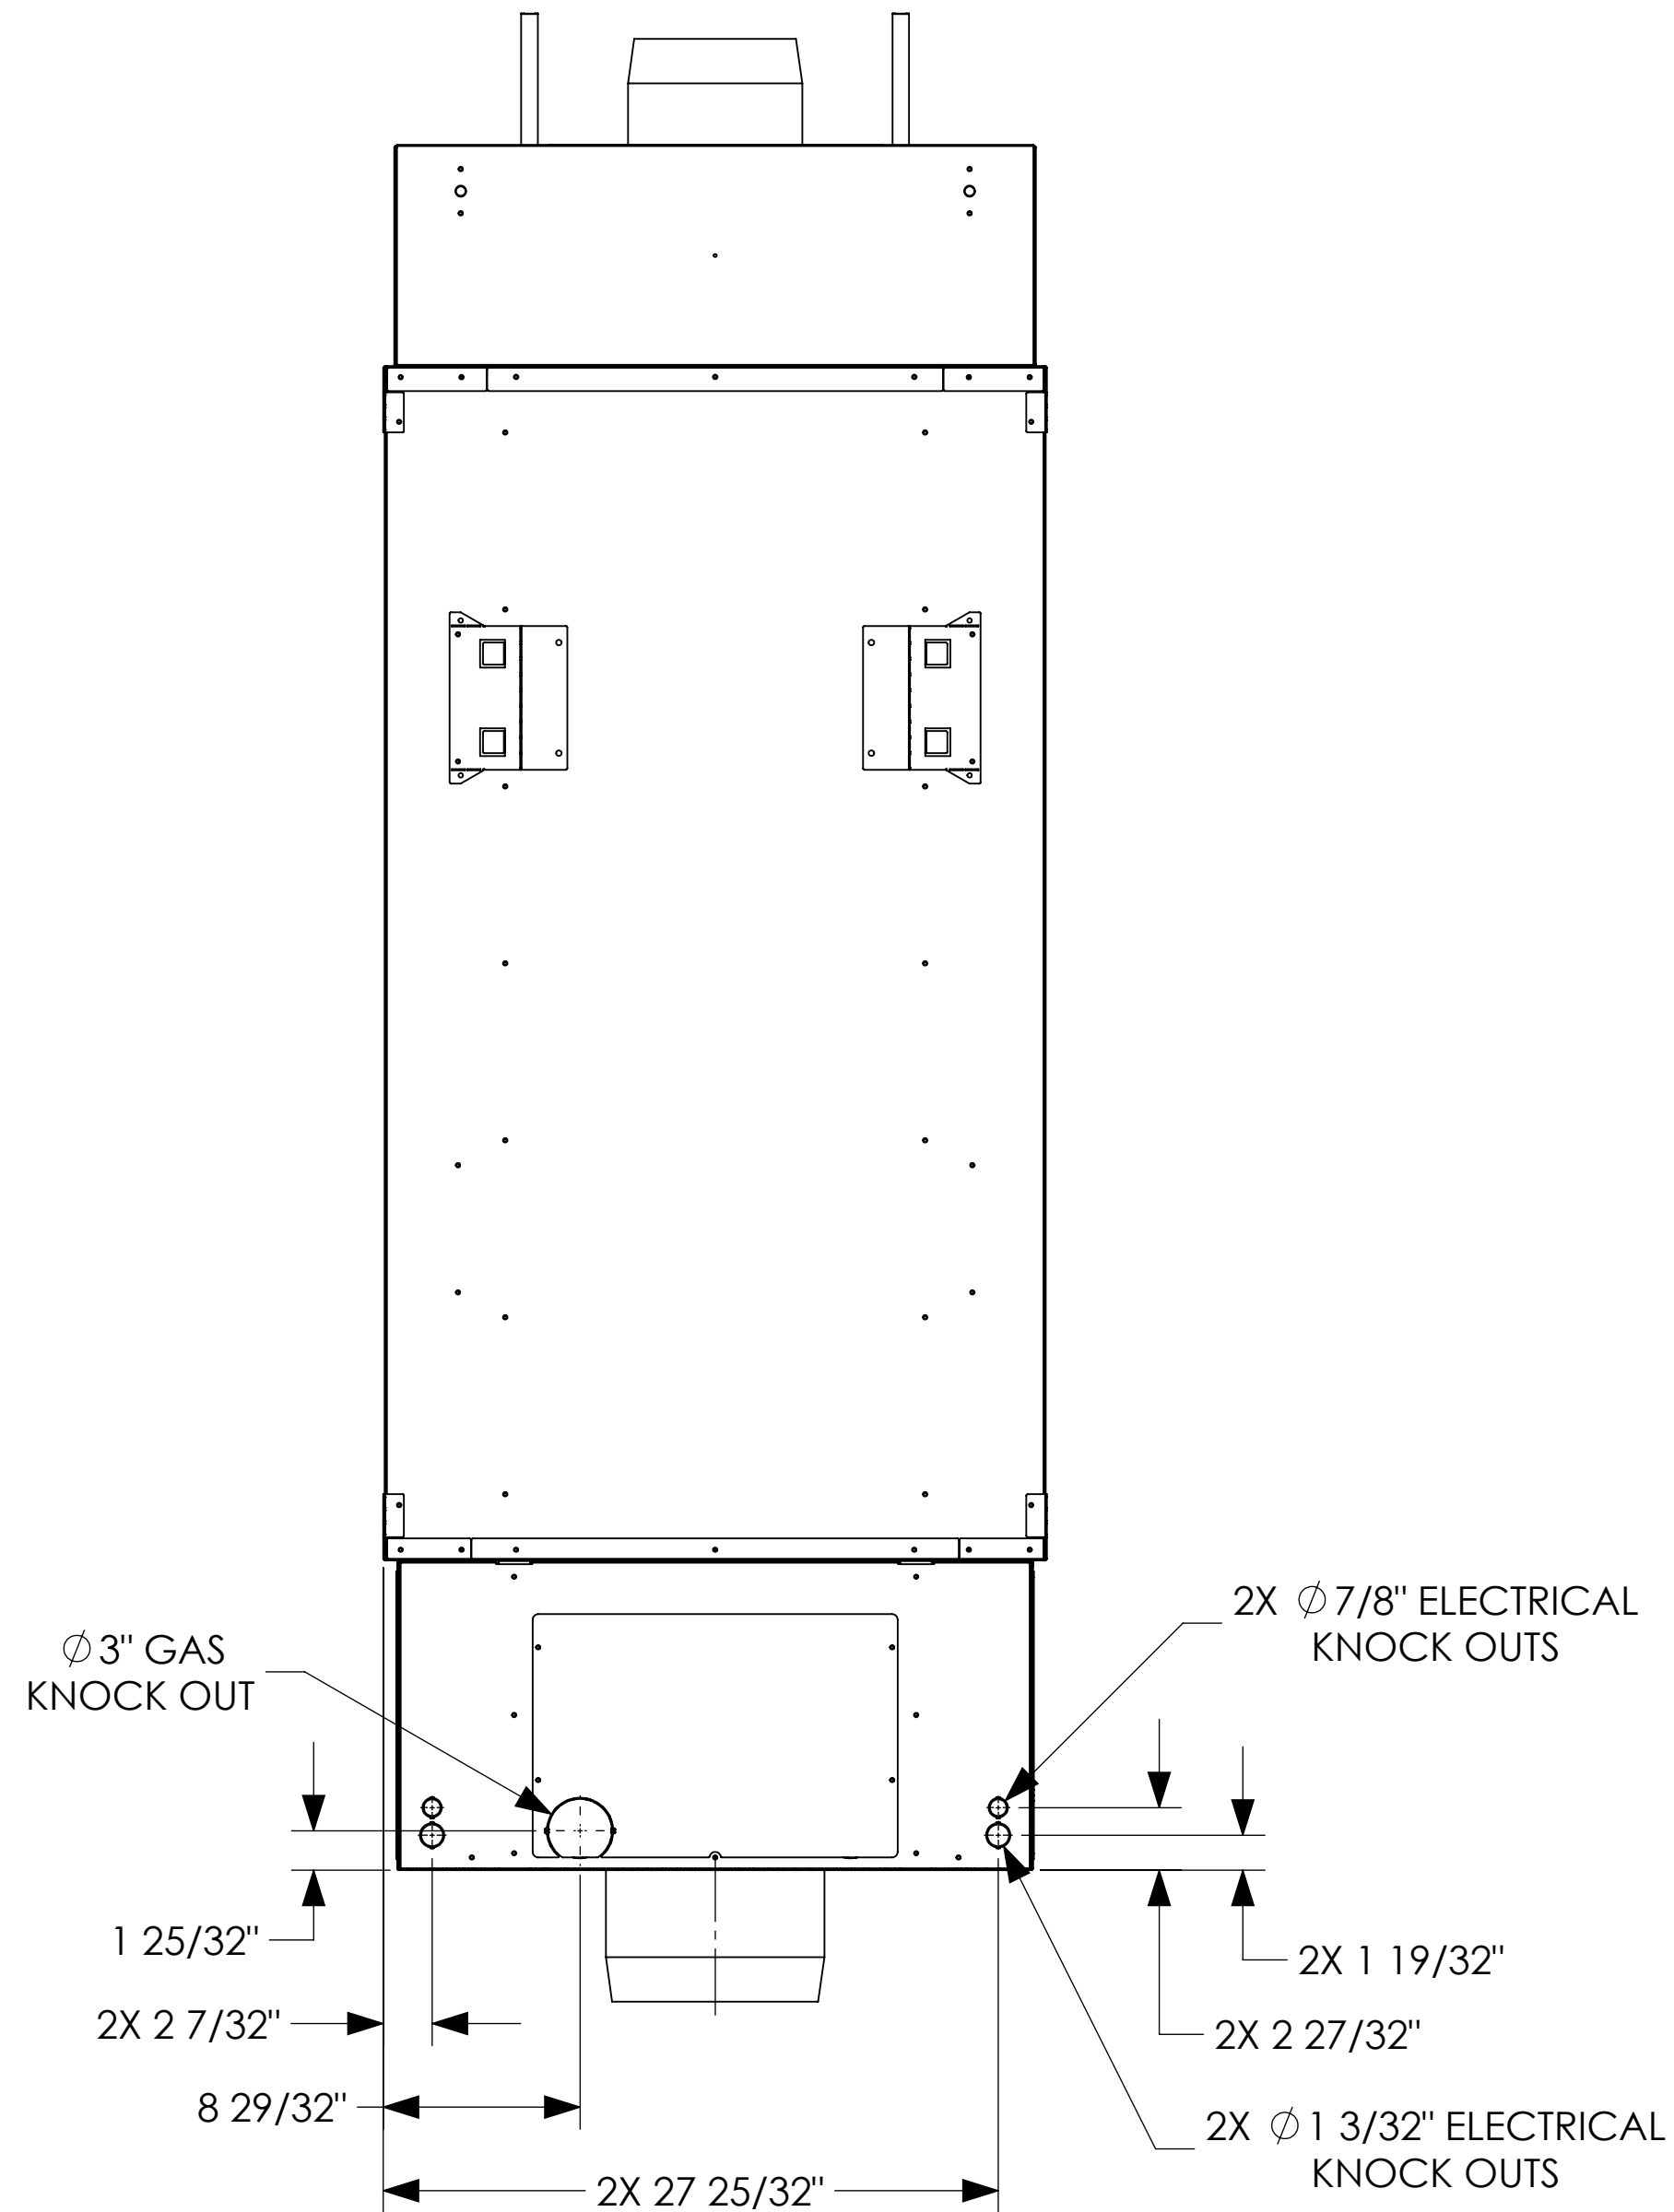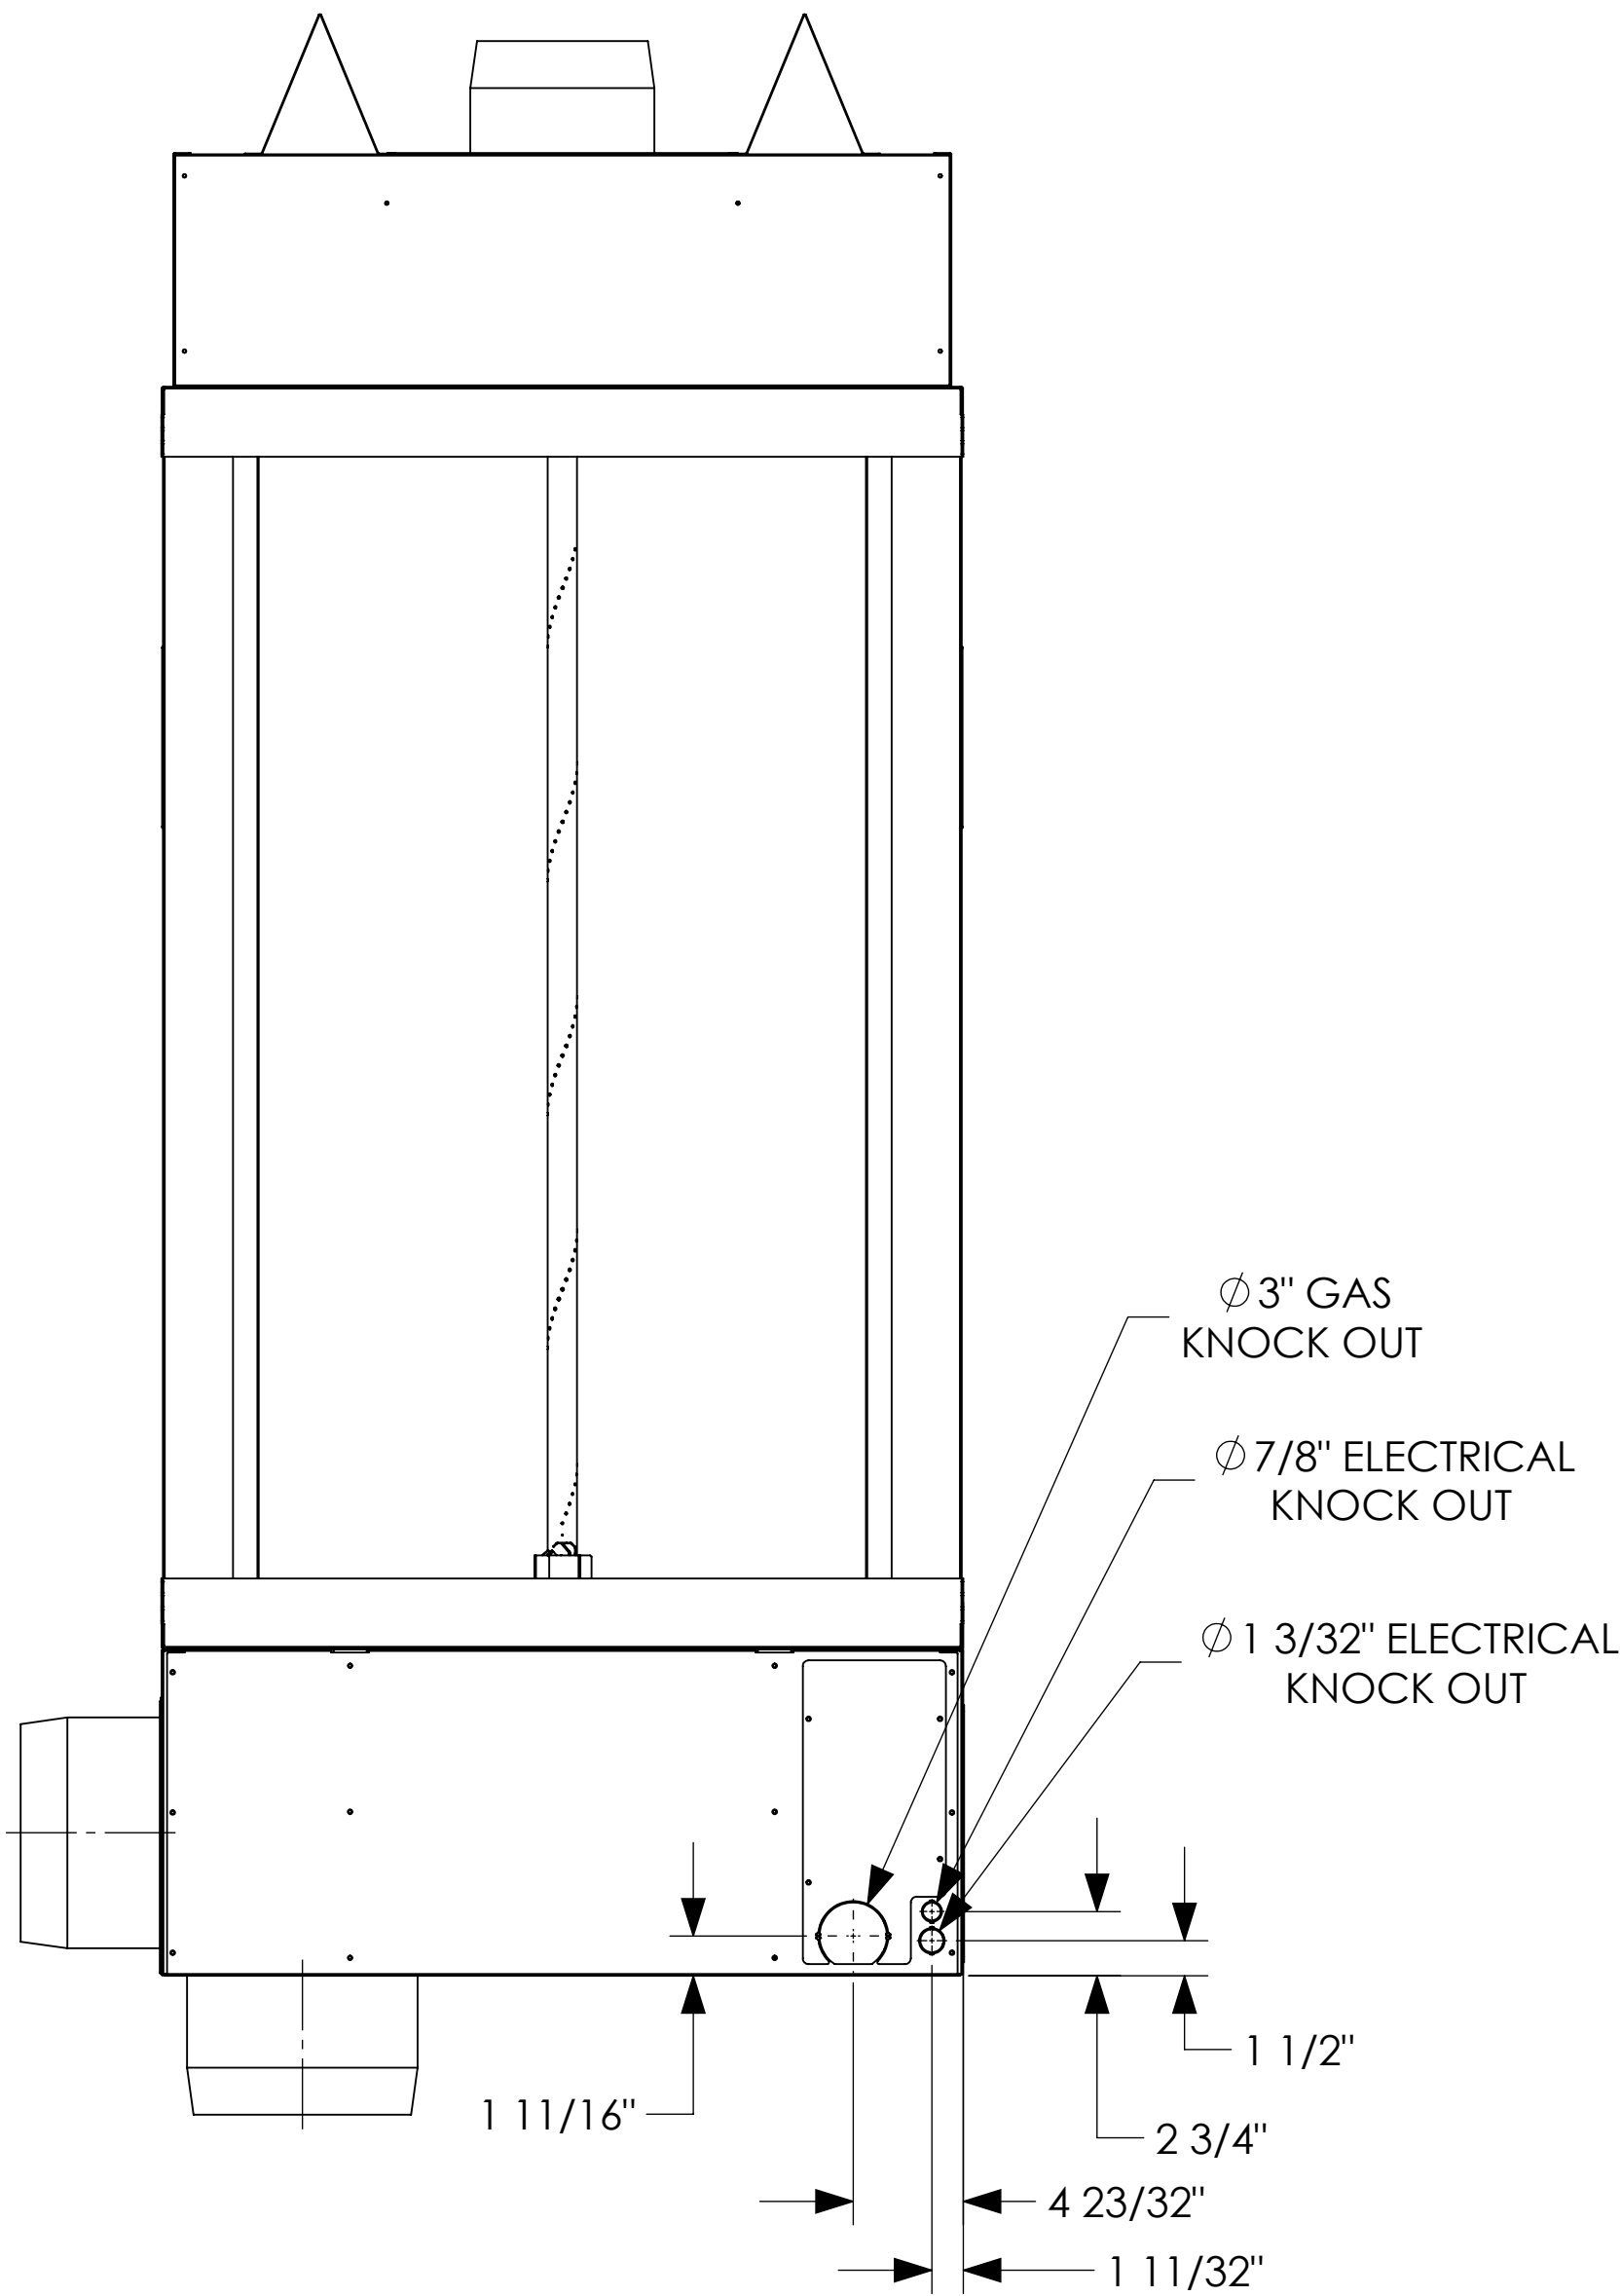


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN **INCHES**: TOLERANCE - (1) PLACE DEC: ±0.1 (2) PLACE DEC: ±0.06 (3) PLACE DEC: ±0.031 ANGLE: ±2° FRACTION ±1/16
◄ OUTSIDE MATERIAL. ○ EDGE OR INSIDE MATERIAL. / OUTSIDE APEX. ● INSIDE APEX. - DIMS ENCLOSED BY AN OVAL ARE CRITICAL DIMENSIONS




DRAWING AND DESIGN IS PROPERTY OF HEARTH & HOME TECHNOLOGIES

MODEL DESCRIPTION: SPIRAL, SEE THRU				
DRAWN BY: M.LEET	DATE: 1-14-25	SERIES NAME: SPIRAL		
ENGINEER: R.BERG	SCALE: N/A	SHEET: SHEET 2 OF 3	STYLE: SPIRAL-ST-SERIES	REV: 1

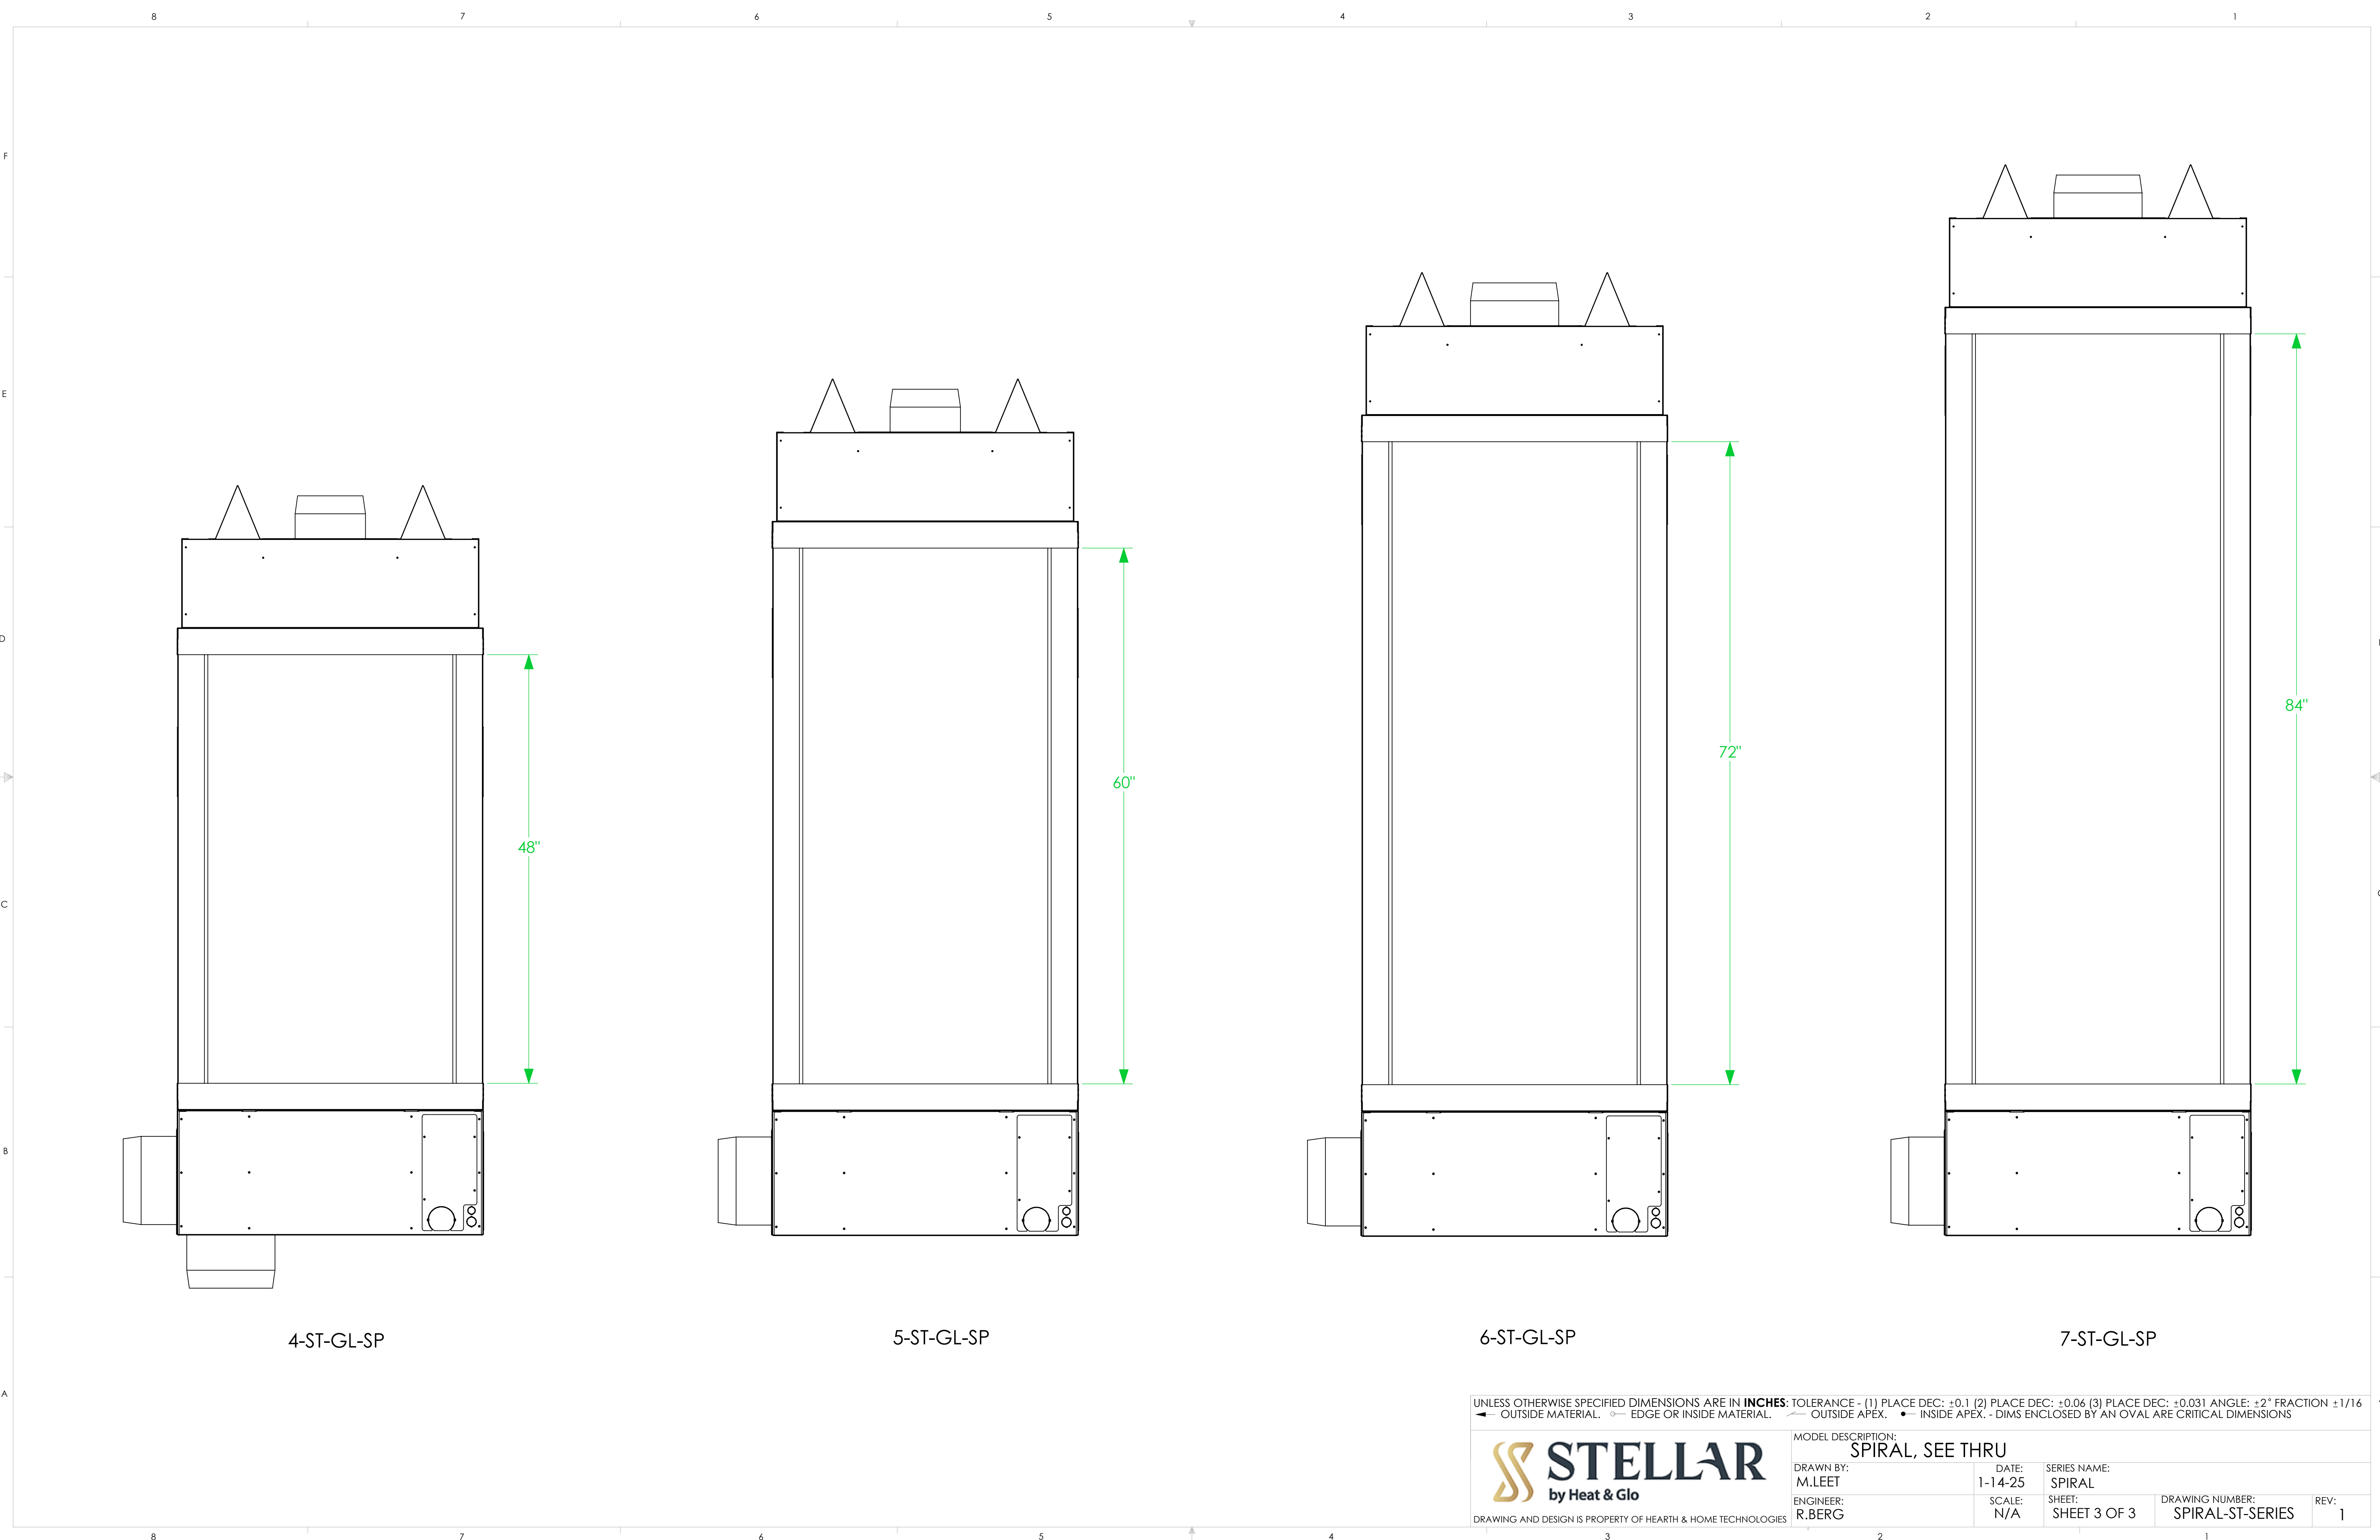

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN **INCHES**: TOLERANCE - (1) PLACE DEC: ± 0.1 (2) PLACE DEC: ± 0.06 (3) PLACE DEC: ± 0.031 ANGLE: $\pm 2^\circ$ FRACTION $\pm 1/16$
◄ OUTSIDE MATERIAL. ◉ EDGE OR INSIDE MATERIAL. ◌ OUTSIDE APEX. ● INSIDE APEX. - DIMS ENCLOSED BY AN OVAL ARE CRITICAL DIMENSIONS

 DRAWING AND DESIGN IS PROPERTY OF HEARTH & HOME TECHNOLOGIES		MODEL DESCRIPTION: SPIRAL, SEE THRU			
		DRAWN BY: M.LEET	DATE: 1-14-25	SERIES NAME: SPIRAL	
	ENGINEER: R.BERG	SCALE: N/A	SHEET: SHEET 3 OF 3	DRAWING NUMBER: SPIRAL-ST-SERIES	REV: 1