



PP60 Pallet Removal

Tools needed: 7/16 deep well socket

1. Loosen the 2 retaining bolts at the rear of the unit and remove the right side panel (dial control side). Fig. 1

2. Reach in from the right side of the unit to access the pallet bolts. Fig. 3 The front 2 pallet bolts are located in front of the pedestal riser, inside of the pedestal base. Fig. 4



Fig. 3



Fig. 1



Fig. 2

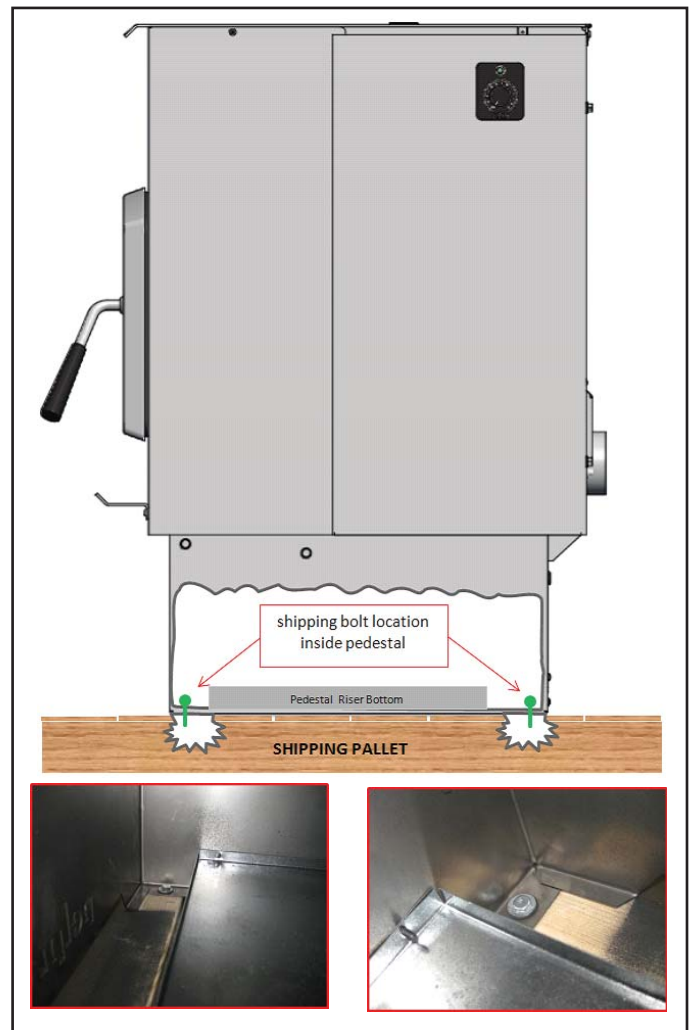


Fig. 4