

Louver Panel

For models: 6000CF-OAK, 8000CF-OAK
- Installation Instructions -



Leave this manual with party responsible for use and operation.


CAUTION! Risk of Cuts or Abrasions. Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.


Note: To install part 2059-201 or 2092-201, proceed to page 2.

Door Models DF-8-CFFS, DF-6-CFFS Installation Instructions


- 1. Remove two screws (discard) and nuts (save for Step 2). See Figure 1.
- 2. Attach louver panel to lower part of door. Tighten kep nut on each side (see Figure 2).

Note: The front edge of the louver panel should slide in between the mesh frame and bottom edge of door (see Figure 2).

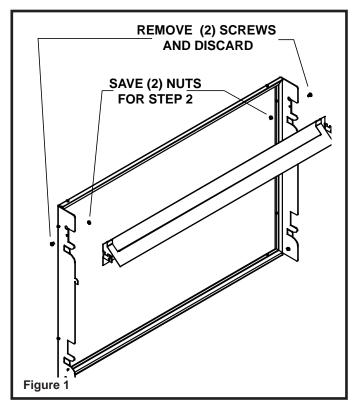

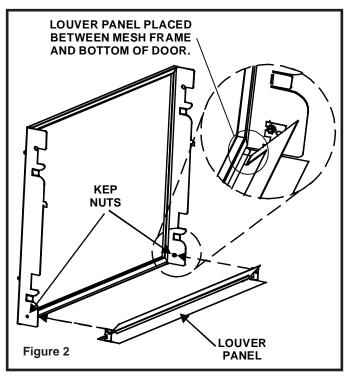

Parts 2059-201 or 2092-201 Installation Instructions

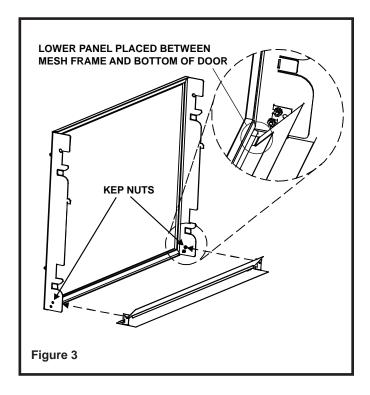

- Remove existing lower mesh panel from door and discard.
- Attach new louver panel by sliding lip under frame. Tighten kep nuts (top one on each side). See Figure 3.

Note: The front edge of the louver panel should slide in between the mesh frame and bottom edge of door (see Figure 3).

Cleaning Instructions for Doors

Use a microfiber cloth and Windex® Original Glass Cleaner or 03M003 Stove Bright® Glass Cleaner to clean the door immediately after installation to remove acids deposited by the installer or technician. Spray the cleaner onto the microfiber cloth and carefully wipe the entire surface. The door should be cleaned in this manner annually by the homeowner to remove fingerprints or other contaminants. Once oxidation of the paint pigment has occurred, cleaning will not restore the original color.

Please contact your Hearth & Home Technologies dealer with any questions or concerns.

For the location of your nearest Hearth & Home Technologies dealer, please visit www.fireside.com.

Hearth & Home Technologies Inc. 7571 215th Street West, Lakeville, MN 55044 www.fireside.com