

Installation Instructions

Models:

Bi-fold Doors Cabinet Doors
GDA-CFXT-BF GDA-CFXT-SB
GDA-CFXT-BFBK GDA-CFXT-BK

These glass doors have been tested for use with specific Hearth & Home Technologies Inc. gas appliances. Check with your local building code agency before you begin installation to ensure compliance with local codes, including the need for permits and follow-up inspections. If you encounter any problems regarding code approvals, or if you need clarification of any of the instructions contained here, contact your Hearth & Home Technologies Inc. dealer. For the dealer nearest you, please visit www.hearthnhome.com

Note: An arrow (▶) found in the text signifies change in content.

Items: • Door Assembly - LH

Fastener Package

• Door Assembly - RH • Door Track

CAUTION




Sharp Edges

 Wear protective gloves and safety glasses during installation.

Step by Step Installation:

- Attach the door track in the center with two screws provided in the fastener pack. Refer to Figure 1.
- Attach the two pivot clips to either side of the door track with the four screws from the fastener pack.
- Holding the door (with the handle to the bottom), insert the bottom door pin into the pivot hole. Tilt the top of the door toward the center of the fireplace so the top pin clears the top door track edge. Slide the pin into the top door track until the pin snaps into the hole in the spring clip.
- Doors may be adjusted by loosening the screws, repositioning the spring clips in the screw slots, tightening the screws.

NOTE: After installing the Cabinet Style Doors, take the clip from the fastener pack and center it on the door panel. Align the back edge of the door clip (the edge with the holes) against the back edge of the panel and secure with the remaining two screws in the existing slots.

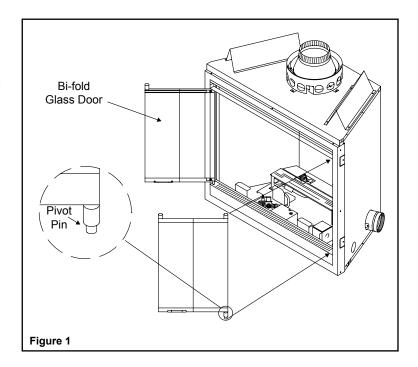



WARNING

Fire Risk Smoke Risk



Doors must be fully opened or fully closed when operating fireplace.

Partially open doors may draw flame, smoke or heat from the fireplace.