



## Door Installation Instructions for Model SL-350TV

1. Remove everything from the packaging and lay the parts out on the floor. Read the directions thoroughly.
2. Loosen the set screw from the hinges and slide the glass out of the hinges.
3. Remove the 2" louver at the bottom of the unit. Remove the top louver.
4. Remove the mesh from the unit.
5. Bend the two tabs down on the new top louvers. The top louvers are the ones with two  $\frac{3}{4}$ " bars on them. Hang the new top louver on the unit.
6. Using the screws included, screw through the two tabs into the face of the unit to secure the louvers to the unit. See Figure 2.
7. Hang the new 2" wide louver on the unit. Place a black bushing in each hole on the ends of the louver. Place a hinge (screw facing in) in each bushing.
8. Place a bushing and hinge in the upper hole in the upper louver.
9. While holding the bushing and hinge with one hand, slide the glass into the hinges. Flush the glass with the back of the hinges and tighten the set screw. **Do not over tighten.**
10. Repeat for other side.
11. After installation the glass panel may have to be made level with each other. **Do not over tighten.**

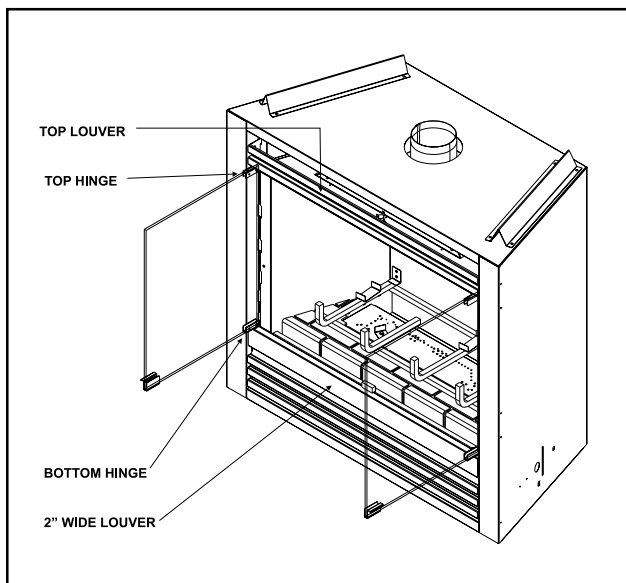


Figure 1

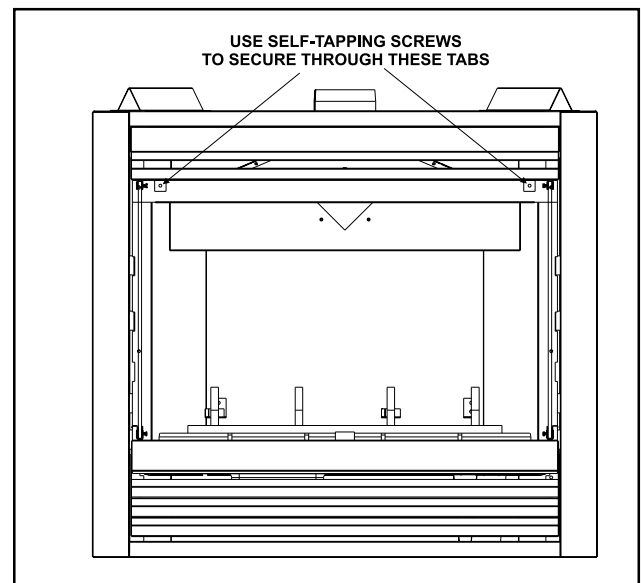


Figure 2