

Replace Junction Box with Cord Bracket Assembly

Models: Tiara I-C, Tiara II-B
Installation Instructions

CAUTION! Risk of Cuts, Abrasions or Flying Debris.
Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.

CAUTION! Do not install damaged components.

TOOLS REQUIRED:

- Phillips screwdriver or cordless drill with 6 inch Phillips bit

Installation Instructions

1. Remove the two screws that fasten the existing junction box to the appliance. See Figure 1. Retain the screws for later use. Discard the junction box.



Figure 1. Remove Junction Box

2. Attach cord bracket assembly to the appliance in the former junction box location. Use screws removed in Step 1 and insert through mounting holes shown in Figure 2. Fasten the ground wire from the power cord on one of the cord bracket mounting holes.



Figure 2. Install Cord Bracket Assembly

3. When attaching fan or other accessories to power cord, feed electrical plug(s) through grommet on bottom of cord bracket. Plug optional fan into receptacle labeled "FAN" only. See Figure 3.

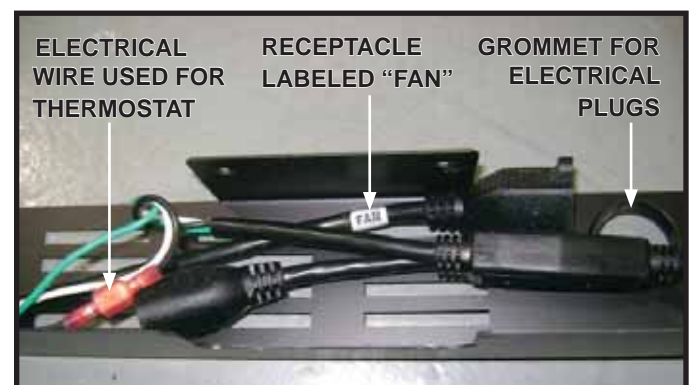


Figure 3.

Please contact your Heat & Glo dealer with any questions or concerns.

For the location of your nearest Heat & Glo dealer, please visit www.heatnglo.com.

Heat & Glo, a brand of Hearth & Home Technologies Inc.
7571 215th Street West, Lakeville, MN 55044
www.heatnglo.com