

FSMQ42ST

Models: MARQ42STIN
- Installation Instructions -



Leave this manual with party responsible for use and operation.

CAUTION! Risk of Cuts, Abrasions or Flying Debris.
Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.

DANGER



HOT GLASS WILL CAUSE BURNS.

DO NOT TOUCH GLASS UNTIL COOLED.

NEVER ALLOW CHILDREN TO TOUCH GLASS.

A barrier designed to reduce the risk of burns from the hot viewing glass is provided with this appliance and shall be installed for the protection of children and other at-risk individuals.

WARNING! Risk of Fire! Combustible materials **MUST NOT** overlap or be placed behind a decorative front.

CAUTION! Do not install damaged components.

1. Remove the outer brick refractory panels from the fireplace.
2. Remove the two firescreen supports from the plastic bag.
3. Remove the nuts from the firescreen supports.
4. Locate the two holes on the left and right side of the glass frame. Place the two threaded studs on the firescreen support through the two holes from underneath the glass frame. Tighten the two nuts down on top of the glass frame. The supports will be angled slightly uphill. Repeat for other side.
5. Remove the glass vanity panel from the top of the firescreen by removing the wire ties.
6. Install the glass vanity panel by installing 4 screws into the top of the glass frame. The vanity panel should sit flush with the outside of the glass. See Figure 1.
7. Replace the outer brick refractory. It is easiest to put the left and right panels in first. Bring the bottoms in toward the center and guide the tops into place while sliding the bottom outward. Put the bottom panel in place last.

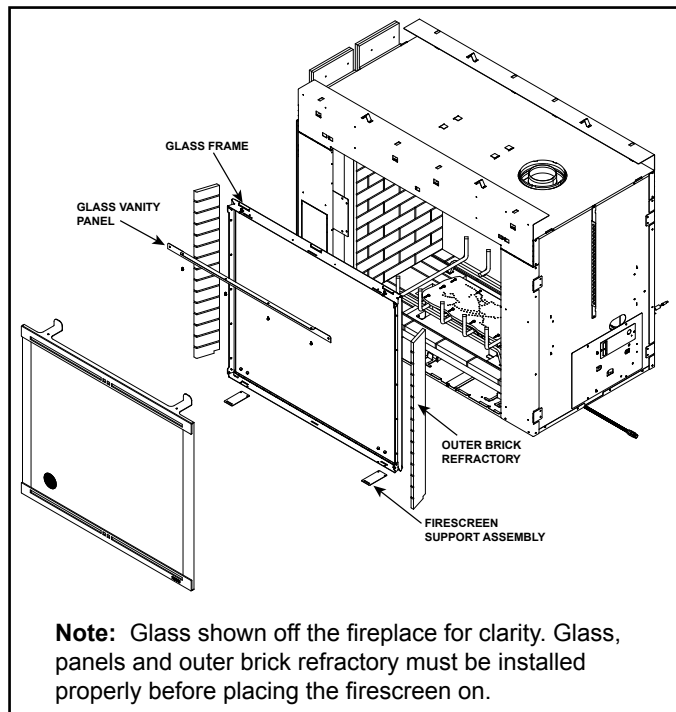


Figure 1

8. Slide the top tabs on the firescreen front into the slots on top of the glass frame. Bring the bottom towards the glass. Lift slightly. The two small tabs will rest into the slots on the firescreen supports.

Service Parts

Item	Part Number
Hardware Bag	2272-095

Cleaning Instructions for Fronts

Use a microfiber cloth and Windex® Original Glass Cleaner or 03M003 Stove Bright® Glass Cleaner to clean the front immediately after installation to remove acids deposited by the installer or technician. Spray the cleaner onto the microfiber cloth and carefully wipe the entire surface. The front should be cleaned in this manner annually by the homeowner to remove fingerprints or other contaminants. Once oxidation of the paint pigment has occurred, cleaning will not restore the original color.

Please contact your Majestic, Hearth & Home Technologies dealer with any questions or concerns.

For the location of your nearest Majestic, Hearth & Home Technologies dealer, please visit www.majesticproducts.com.

Hearth & Home Technologies
7571 215th Street West, Lakeville, MN 55044
www.hearthnhome.com