

TG-KIT

Paint Application Instructions



Leave this manual with party responsible for use and operation.

WARNING! Review all safety information on individual paint containers.

WARNING! Explosion Risk! Turn OFF gas to appliance.

1. Remove decorative front (if present).
2. Remove glass assembly.
3. Remove logs from appliance.
4. Remove grate from appliance.
5. Remove pilot bracket from burner.
6. Remove burner from appliance.
7. Shake mineral wood from top of burner and discard.
8. Remove Mystic Embers from bottom of the firebox and discard.
9. Mask off (4) edges of the firebox with masking tape provided.
10. Mask off LED lights and pilot assembly inside the firebox with masking tape provided.
11. Spray gray paint on brick faces, sides, back and top. See Figure 1.



Figure 1

12. Spray black paint on the bottom of firebox. See Figure 2.



Figure 2

13. Spray black paint around the flue pipe opening at the top of the firebox. See Figure 3.

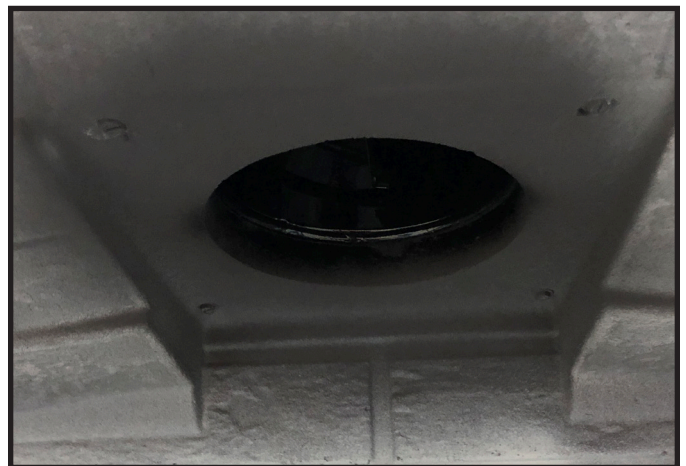


Figure 3

14. Spray black paint around the outside 2 inch edge of the firebox. See Figure 4.



Figure 4

15. Lightly spray or fog the top, back, and sides of the firebox with black paint until desired color is achieved. See Figure 5.



Figure 5

16. Remove all masking tape.
17. Replace burner in the appliance.
18. Replace mineral wool (057-721) on the burner following instructions in the Installation Manual. **DO NOT COVER PORT HOLES.**
19. Replace log grate in the appliance.
20. Replace logs in the appliance. Follow the log placement instructions in the Installation Manual.
21. Place provided Mystic Embers in appliance, following instructions in the Installation Manual.