


REM-KIT

Parts included in your REM-KIT


	DESCRIPTION	PART NUMBER
1	Variable flame adjustable motor	16-1602
2	Remote Control	09-1008
3	Cover Log	H-0586A

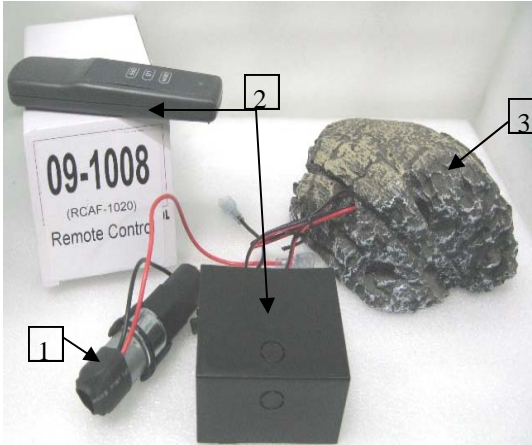


To connect your REM-KIT follow the instructions below.

It is recommended that you turn the gas off to your appliance before installing the REM-KIT.


STEP 1: Remove the large silver screw with a flat head screwdriver. Discard the screw.

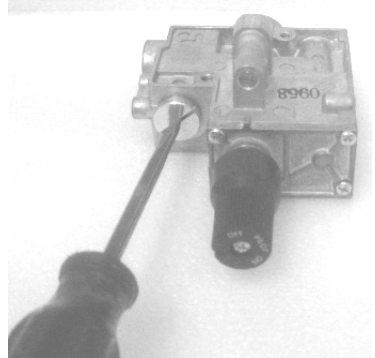

STEP 2: Screw the solenoid into the opening to attach to the valve.

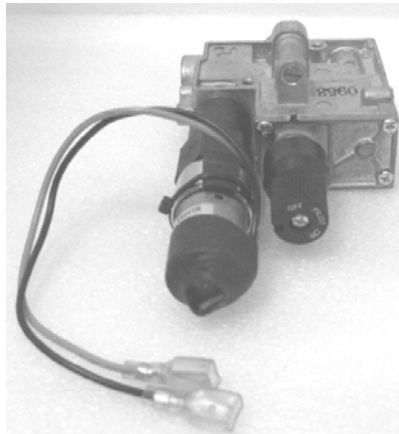

STEP 3: Connect wires from the motor to the wires on remote receiver (black to black and red to red). Once the remote control is connected and working place the log cover over the remote receiver.

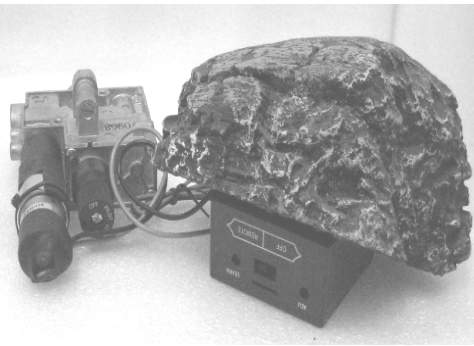

Place the battery pack/log cover towards the front outside corner of the fireplace.

STEP 4: Turn gas on to the appliance.

Follow the instructions provided with your burner to re-light your pilot.

Once your pilot has been lit, to operate the remote control, follow the instructions inside the remote control box.