

Courtyard Stainless Steel Liner

Models: ODCOUG-36SSL, ODCOUG-42SSL

This kit has been tested for use with specific Hearth & Home Technologies products. Check with your local building code agency before you begin installation to ensure compliance with local codes, including the need for permits and follow-up inspections. If you encounter any problems regarding code approvals, or if you need clarification of any of the instructions contained here, contact your Hearth & Home Technologies dealer. For the dealer nearest you, please visit www.hearthn-home.com.

Model(s)	Kit
ODCOUG-36NR	ODCOUG-36SSL
ODCOUG-36TS	
ODCOUG-42NR	ODCOUG-42SSL
ODCOUG-42TS	

This Stainless Steel Liner kit is designed for use on the models shown in the chart above. Read these instructions thoroughly before beginning installation.

CAUTION: Allow appliance to cool completely if it has been in operation.

NOTE: Some models may require removal of a screen panel, log assembly or refractory before installation of the stainless liner kit.

KIT CONTENTS:

- (1) Rear Stainless Steel Panel
- (1) Left Stainless Steel Panel
- (1) Right Stainless Steel Panel
- (4) #8 x 1/2" Screws

TOOL REQUIRED:

Phillips head screwdriver

INSTRUCTIONS:

Remove grate, Log Set, Media and Refractory:

1. Remove grate, log set and media, if installed.
2. Remove refractory, if installed, by removing brackets at the top and bottom of each side panel. See Figure 1. Tilt refractory top edge towards the center of the appliance and lift out. Repeat on other side.



Figure 1

3. To remove rear refractory, it is necessary to remove the Burner Rear Cover. Remove (3) screws securing cover, lift cover to remove and set aside. See Figure 2.



Figure 2

4. To remove rear refractory panel, tilt top edge towards the center of the appliance and lift out.
5. Use a shop vac or small brush to clean debris left from refractory panels to ensure a flat surface for the stainless steel panels to sit upon.

Remove Side Covers:

6. Remove screws (2) securing the right and left side covers. Pull side covers towards to the center of appliance and remove. See Figure 3.

Note: Side covers will no longer be needed.



Figure 3

- Carefully remove protective coating from new stainless steel panels.
- Lift rear stainless panel up and over the rear edge of the burner assembly, place panel against appliance rear wall. Reinstall Burner Rear Cover with (3) screws removed in Step 3. See Figure 4.

Note: Rear stainless panel is secured in place by the side panels and will need to be held in place while installing Burner Rear Cover.



Figure 4

- Position right stainless panel against firebox side and slide towards the rear of the firebox until side panel contacts the rear panel. Secure right side panel with (2) screws provided. See Figure 5.



Figure 5

- Repeat for left stainless panel installation. See Figure 6.

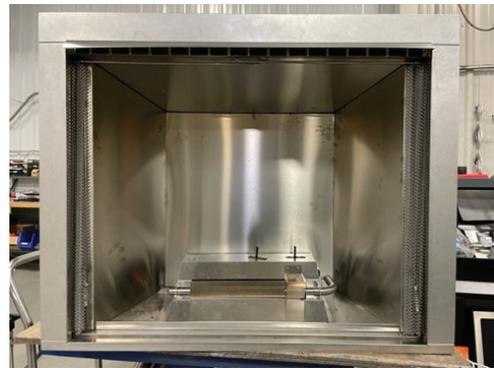


Figure 6

- Using cleaner designed for use on stainless steel. Apply cleaner to a terry cloth and wipe appliance following the grain of the stainless. Do not spray cleaner directly onto the appliance. Remove any fingerprints present after installation.
- Reinstall grate, log set and media.

Please contact your Hearth & Home Technologies dealer with any questions or concerns. For the location of your nearest Hearth & Home Technologies dealer, please visit www.hearthnhome.com.