



SPECIFICATIONS

MODEL	TECHNICAL				PERFORMANCE								
	Width	Height	Depth	Weight	Peak BTU/Hr Output ¹	Heating Capacity ²	Maximum Burn Time ³	Efficiency	Emissions	Firebox Capacity	Maximum Log Length	Viewing Area	EPA Certification Number
EXPLORER III	30-1/8"	31-3/8"	28"	Actual: 545 lbs Shipping: 576 lbs	82,100	1,500 - 4,000 sq. ft.	15 hrs.	75.4%	2.04 g/hr	3.0 cu. ft.	22"	286 sq. in.	


Front View

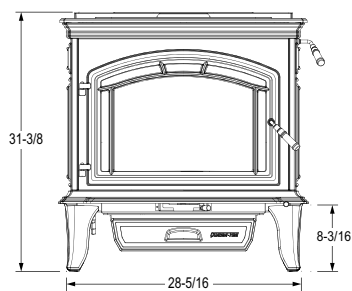


Top View



Right Side View



Right Side View
w/Horizontal Flue



1: BTUs: 1st hour output @ 71.5%. BTUs will vary depending on the type of fuel used and moisture content of the fuel.


2: Heating capacity (in square feet) is a guideline only and may differ due to climate, building construction and condition, amount and quality of insulation, location of the heater, and air movement in the room.

3: Actual burn times will vary based on how the appliance is operated, load size, moisture content and type of wood used, chimney height and installation


CLEARANCES TO COMBUSTIBLES

INSTALLATION CLEARANCE	A	B	C	D	E	F	G
Installation: Full Vertical OR Horizontal with Minimum 2 Feet Vertical Off Stove Top							
Single Wall Pipe	10-1/2"	7"	27"	12"	18-1/2"	10"	52-1/2"
Double Wall Pipe	9-1/2"	6"	27"	12"	16"	7-1/2"	52-1/2"
Installation: 90° Elbow Off Top of Stove Through Backwall							
Double Wall Pipe	9-1/2"	6"	27"	12"	16"	7-1/2"	52-1/2"


Backwall / Sidewall



Corner Installation



Stove to Ceiling
Clearance

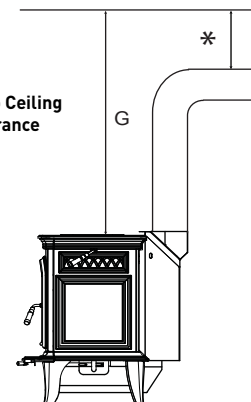

*Follow pipe manufacturer's clearances as required