

OPTIONAL FOUNDATION REVERSIBLE MIRRORED PANELS **MIRROR-4-(SS/BAY), MIRROR-5-(SS/BAY), MIRROR-6-(SS/BAY),** **MIRROR-7-(SS/BAY), MIRROR-PIER, MIRROR-ST**

Installation Instructions

CAUTION! Risk of Cuts, Abrasions or Flying Debris.
 Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.

Kit Contents

Quantity of each component varies by appliance size.
 Use included sheet metal screws to install side glass clips and angled glass clips. See Figure 1.

- Tempered Rear Mirrored Panels
 (Single Sided, Bay)
- Tempered Side Mirrored Panel(s)
 (Single Sided, See Through, Pier)
- End Panel or Side Panel Glass Clips
- Rear Panel Top Angled Glass Clips
- Rear Panel Bottom Retainer Clips
- Sheetmetal Screws

Note: Clean panels with a non-abrasive, non-ammonia based glass cleaner prior to installation.

Single Sided

1. Install the mirrored panels, similar side(s) out, before the clear viewing area glass is installed.

Note: Rear mirrored panels are about 12 inches wide. There is one panel for every foot of viewing length. See Figure 3 and Figure 4.

2. Using quality suction cups, carefully lift the mirrored panels into the fireplace.
3. Set the mirrored panel on the rear platform above the media bed. Do not set the mirrored panel down on the media bed or damage to the media screen and/or mirrored panel could occur. Set the bottom of the mirrored panel down first, then rotate the top into place. See Figure 2.

4. Using the angled glass clips and screws from the kit, install the clips into the holes in the angled portion of the firebox top. Repeat for entire back wall. See Figure 3.
5. Install side mirrored panel(s) by setting the mirrored panel into place on the side platform above the media bed. See Figure 2.
6. Install the side glass clip into the side of the fireplace above the mirrored panel to hold the mirror in place. See Figure 3.
7. Remove one screw at a time from the back of the mesh screen and place a retainer clip against the back mirrored panel and replace the screw. Repeat for two clips per mirrored panel. See Figure 4.

See Through and Pier Appliances

1. Install the mirrored panels, similar side(s) out, before the clear viewing area glass is installed.
2. Using quality suction cups, carefully lift the mirrored panels into the fireplace.
3. Install the end panel(s) by setting it into place on the platform above the media bed. See Figure 2.
4. Install the glass clip into the side of the fireplace above the mirrored panel to hold the mirrored panel in place. See Figure 2.

Bay Appliances

1. Install the mirrored panels, similar side out, before the clear viewing area glass is installed.

Note: Rear mirrored panels are about 12 inches wide. There is one panel for every foot of viewing length. See Figure 3 and Figure 4.

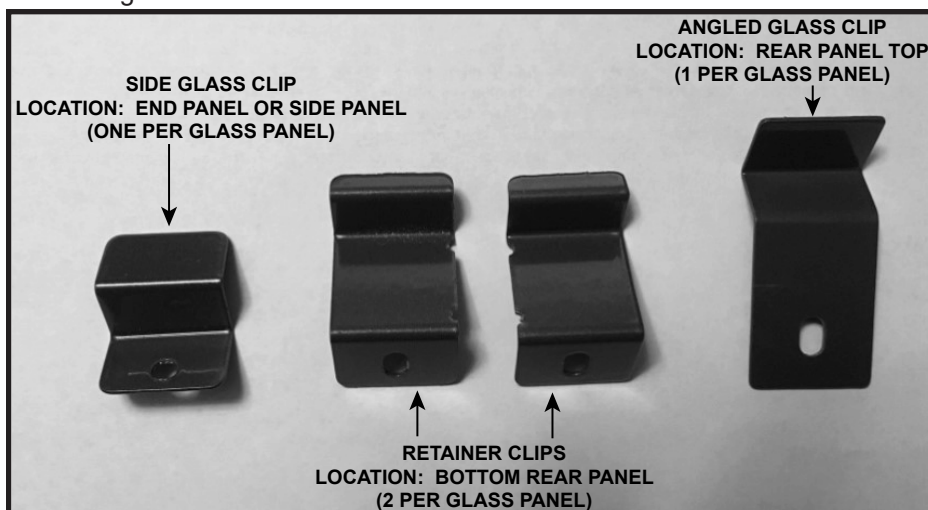


Figure 1 Types of Glass Clips In Kit

2. Using quality suction cups, carefully lift the rear mirrored panel into the fireplace.
3. Set the mirrored panel on the rear platform above the media bed. Do not set the mirrored panel down on the media bed or damage to the media screen and/or mirrored panel could occur. Set the bottom of the mirrored panel down first, then rotate the top into place. See Figure 2.
4. Using the angled glass clips and screws from the kit, install the clips into the holes in the angled portion of the firebox top. Repeat for entire back wall. See Figure 3.

5. Remove one screw at a time from the back of the mesh screen and place a retainer clip against the back mirrored panel and replace the screw. Repeat for two clips per mirrored panel. See Figure 4.

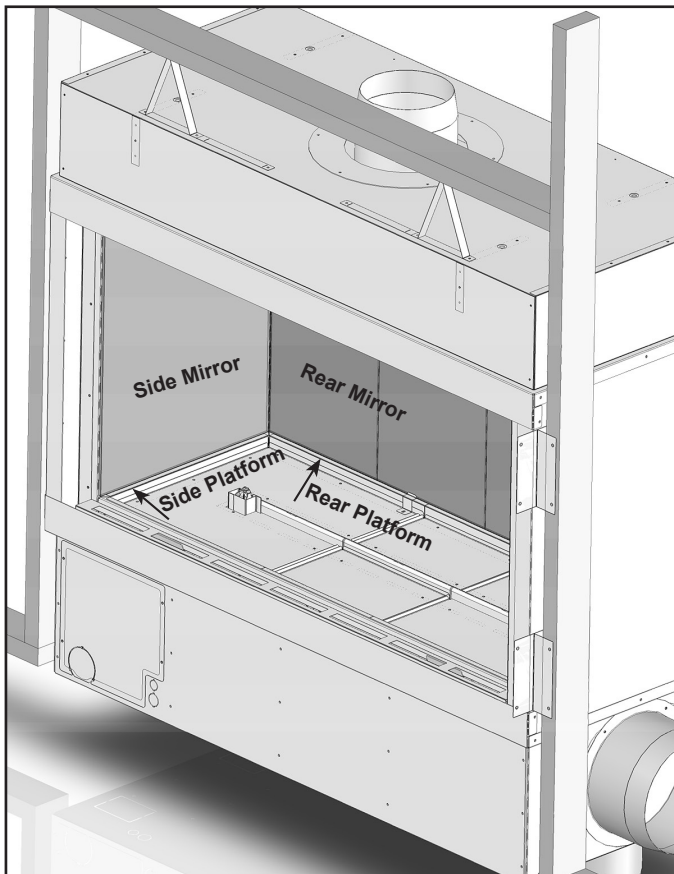


Figure 2 Placing Mirrored Panels in Firebox - Similar Side(s) Out

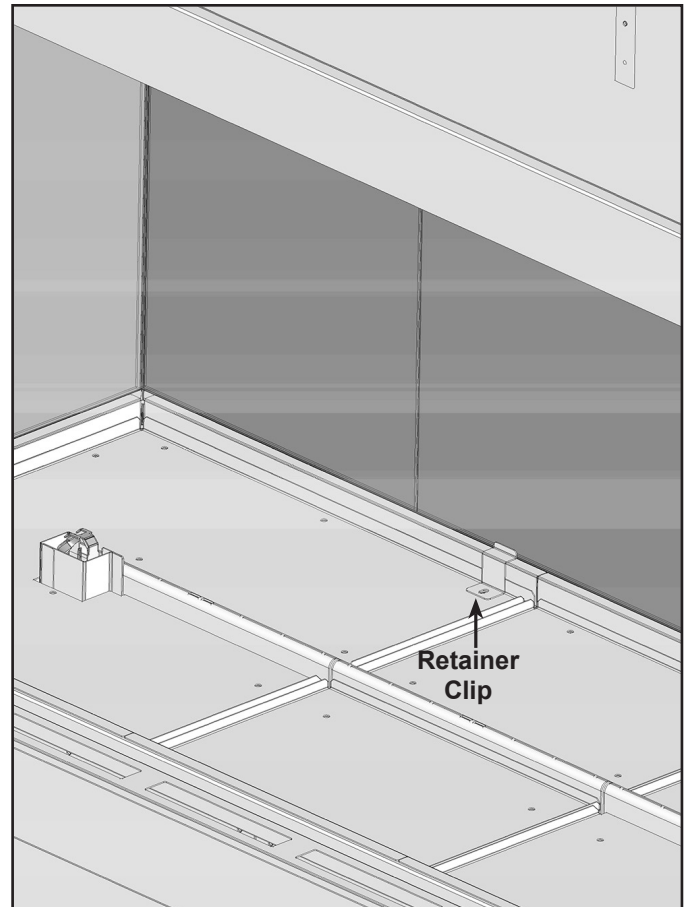


Figure 4 Retainer Clip Installed

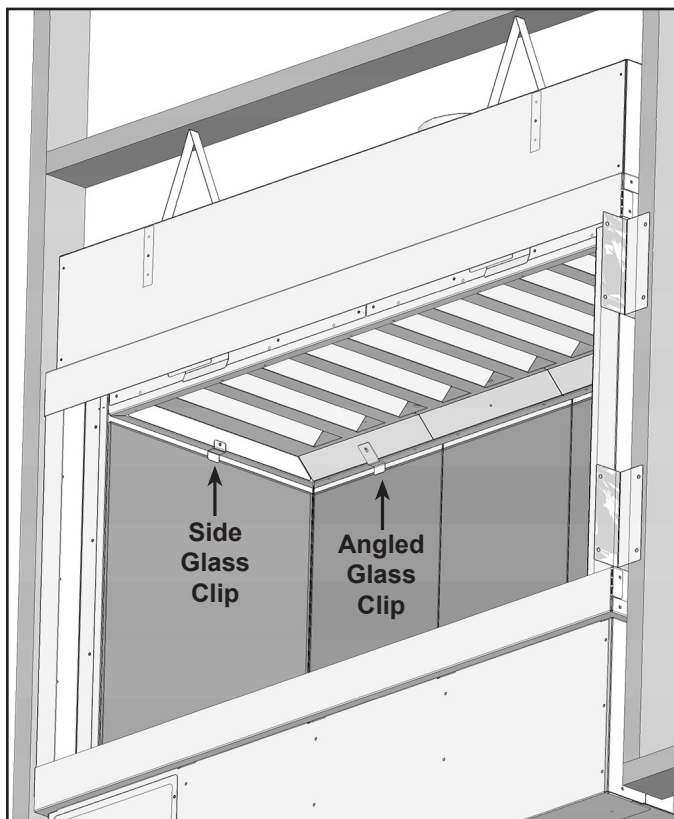


Figure 3 Glass Clips Installed

Please contact your Hearth & Home Technologies dealer with any questions or concerns. For the location of your nearest Hearth & Home Technologies dealer, please visit www.hearthnhome.com.

Hearth & Home Technologies
7571 215th Street West, Lakeville, MN 55044
www.hearthnhome.com