




— —
&
EVEREST
— —

DIRECT VENT GAS FIREPLACE

— —
HEAT & GLO[®]
— —

EVEREST

Invigorate a space with a twist on tradition. The Everest's upright design elevates your fire, reaching new heights of fireside appeal.

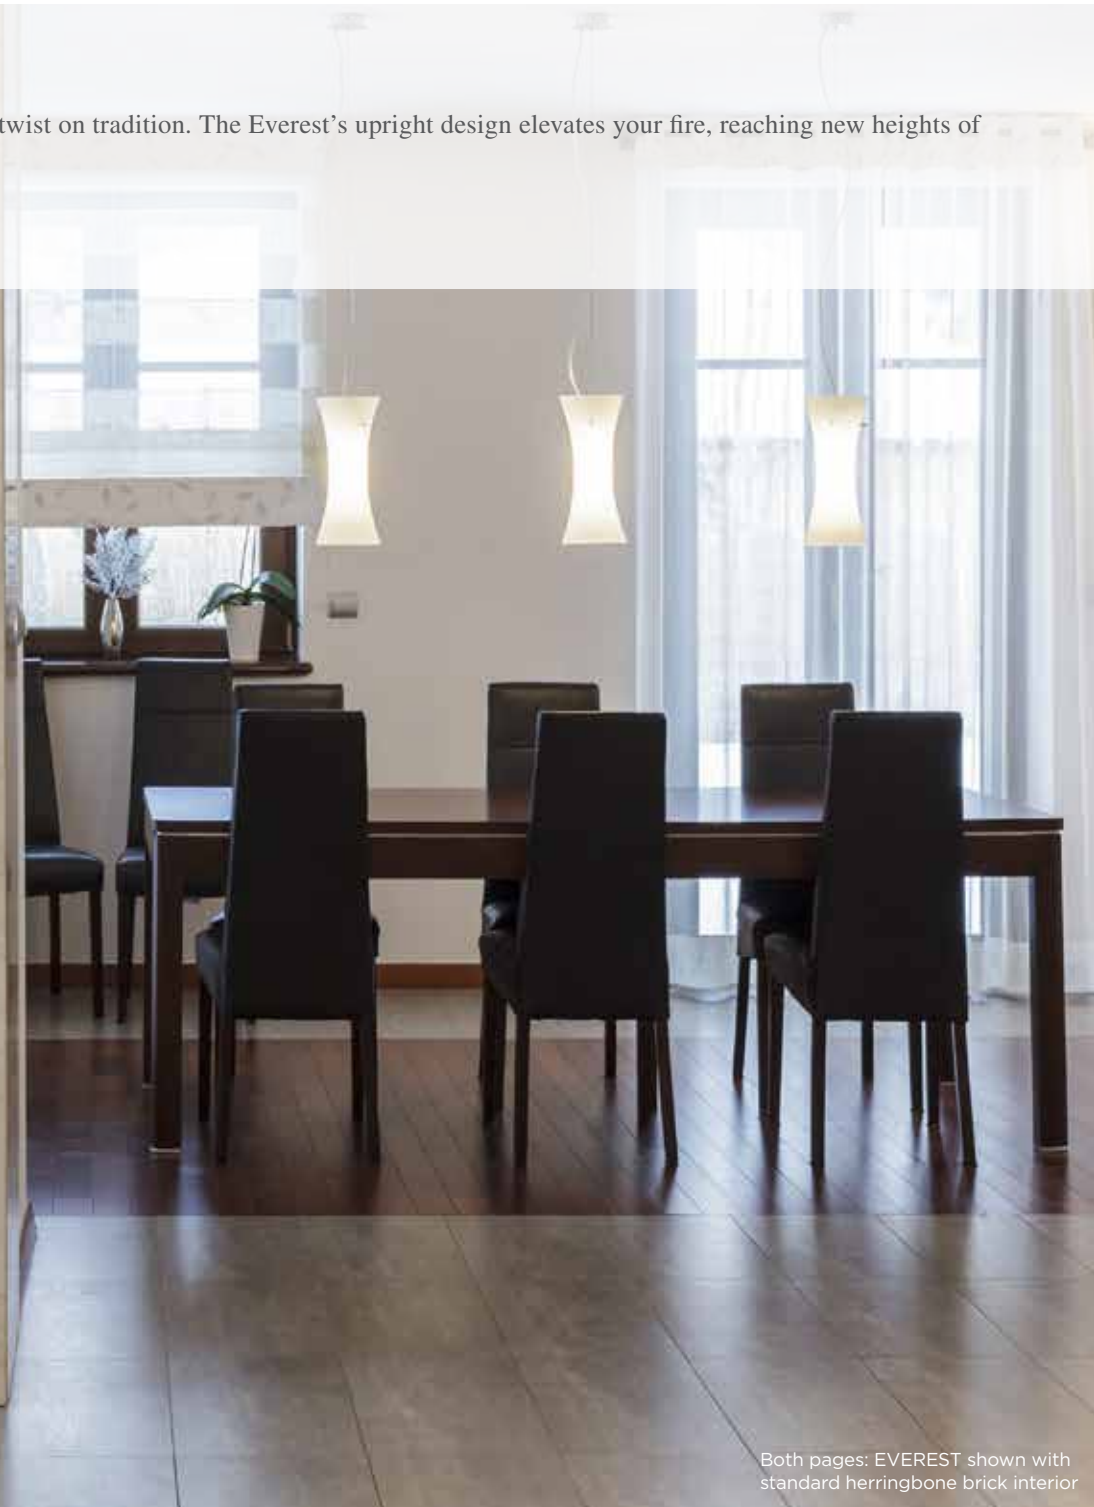

Both pages: EVEREST shown with standard herringbone brick interior

FIRE FROM WITHIN

It's a stunning fire. But take a closer look. An innovative burner design produces flames from within the logs, creating depth and adding intensity.

UPRIGHT STYLE. DOWNRIGHT PERFORMANCE

Showcase the style and feel the heat. The shallow footprint of the Everest radiates more warmth out into the room, quickly and effectively.



TECHNOLOGY



INTELLIFIRE™ IGNITION SYSTEM

The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition

system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs.



DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the

home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.



HEAT-ZONE™ TECHNOLOGY


Draw heat from the fireplace into another room of the home, up to 20 feet away.

When a Heat-Zone kit is run continuously, it will redirect up to 25% of the fireplace's heat to another area, thus reducing wall temperatures above the fireplace. Two heat zones run continuously will redirect up to 50% of the fireplace's heat.


SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE 24-3/4 x 31-1/2 [629 x 800]	BTU/HOUR INPUT 23,000-33,000 (NG)
	Unit	Framing	Unit	Framing	Unit	Framing	Unit	Framing		
EVEREST	34-1/8 [867]	35-1/8 [892]	17-7/8 [454]	35-1/8 [892]	52 [1321]	51-1/2 [1308]	20-7/8 [531]	21-3/8 [543]		


TOP VIEW




LEFT SIDE VIEW



FRONT VIEW



RIGHT SIDE VIEW



Dimensions in diagrams are in inches and millimeters. Dimensions in table are in inches. Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions shipped with product. We recommend measuring individual units at installation. Assumes the use of 1/2" sheetrock. NOTE: Combustible material should not cover the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.

EFFICIENCIES

EnerGuide (CSA P.4.1-15) EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

EVEREST

46.3% (NG)

For complete information on this model, please contact us at:

HEAT & GLO
No one builds a better fire

Web: heatnglo.com
Phone: (888) 427-3973
E-mail: info@heatnglo.com

[facebook.com/HeatandGlo](https://www.facebook.com/HeatandGlo)
twitter.com/HeatandGlo
[youtube.com/HeatandGlo](https://www.youtube.com/HeatandGlo)

LIMITED LIFETIME WARRANTY¹

The strongest in the industry, Heat & Glo provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

¹: For full warranty details see heatnglo.com
Fireplace surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplace-safety

HNG-1136-0618

