

No one builds a better fire

RADIUS-V12, RADIUS-S21, RADIUS-H31 DECORATIVE FRONTS Installation Instructions



Leave this manual with party responsible for use and operation.

A WARNING



HOT SURFACES!

Glass and other surfaces are hot during operation AND cool down.

Hot glass will cause burns.

- Do not touch glass until it is cooled
- · NEVER allow children to touch glass
- · Keep children away
- CAREFULLY SUPERVISE children in same room as fireplace.
- · Alert children and adults to hazards of high temperatures.

High temperatures may ignite clothing or other flammable materials.

 Keep clothing, furniture, draperies and other flammable materials away.

This appliance has been supplied with an integral barrier to prevent direct contact with the fixed glass panel. Do NOT operate the appliance with the barrier removed.

Contact your dealer or Hearth & Home Technologies if the barrier is not present or help is needed to properly install one.

CAUTION! Risk of Cuts or Abrasions. Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.

CAUTION! Do not install damaged components. If you received components that are damaged, contact your dealer for assistance.

INSTALLATION

- Remove decorative front and hardware bag from packaging.
- 2. Install shoulder bolts securely into the threaded holes on the appliance outer wrap in four locations. See Figure 1

WARNING! Risk of injury! Install shoulder bolts securely to prevent interference with glass in case of delayed ignition.

3. Install the decorative front on the appliance by mating the four hooks on the decorative front with the four shoulder bolts on the appliance. See Figure 1.

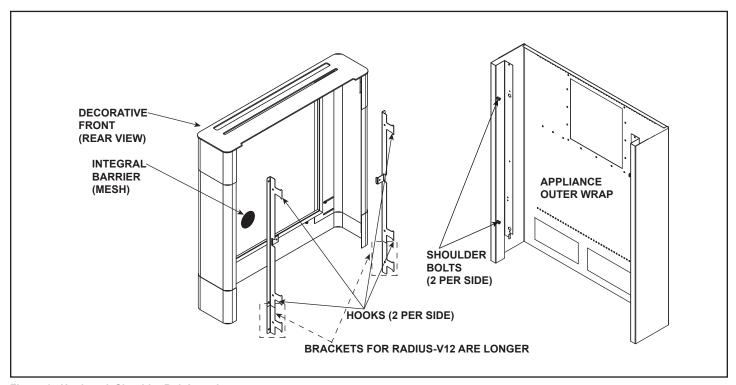


Figure 1. Hook and Shoulder Bolt Locations

WARNING! Risk of Overheating and Fire! Do not allow convection air outlet to be blocked or covered. Non-combustible material must not exceed 4 inches in thickness. See Finishing Section of Appliance Installation Manual.

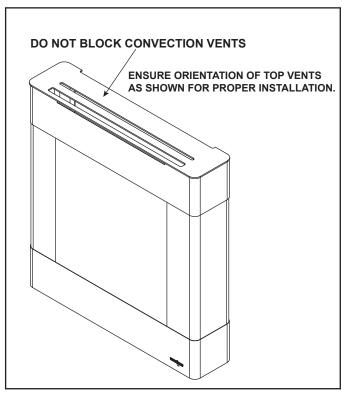


Figure 2. Location of Convection Vents

Cleaning Instructions for Doors

Use a microfiber cloth and Windex® Original Glass Cleaner or 03M003 Stove Bright® Glass Cleaner to clean the door immediately after installation to remove acids deposited by the installer or technician. Spray the cleaner onto the microfiber cloth and carefully wipe the entire surface. The door should be cleaned in this manner annually by the homeowner to remove fingerprints or other contaminants. Once oxidation of the paint pigment has occurred, cleaning will not restore the original color.

Please contact your Heat & Glo dealer with any questions or concerns. For the location of your nearest Heat & Glo dealer, please visit www.heatnglo.com.

Heat & Glo, a brand of Hearth & Home Technologies 7571 215th Street West, Lakeville, MN 55044 www.heatnglo.com