




Log Placement Instructions

Models: EYF24-R, EYF30-R

⚠WARNING!

The positioning of the logs is critical to the safe, clean operation of this gas log set. Sooting and other problems may result if the logs are not properly positioned per these instructions. Failure to position in accordance with the diagrams below, or failure to use only parts specifically approved for this log set may result in property damage or personal injury.

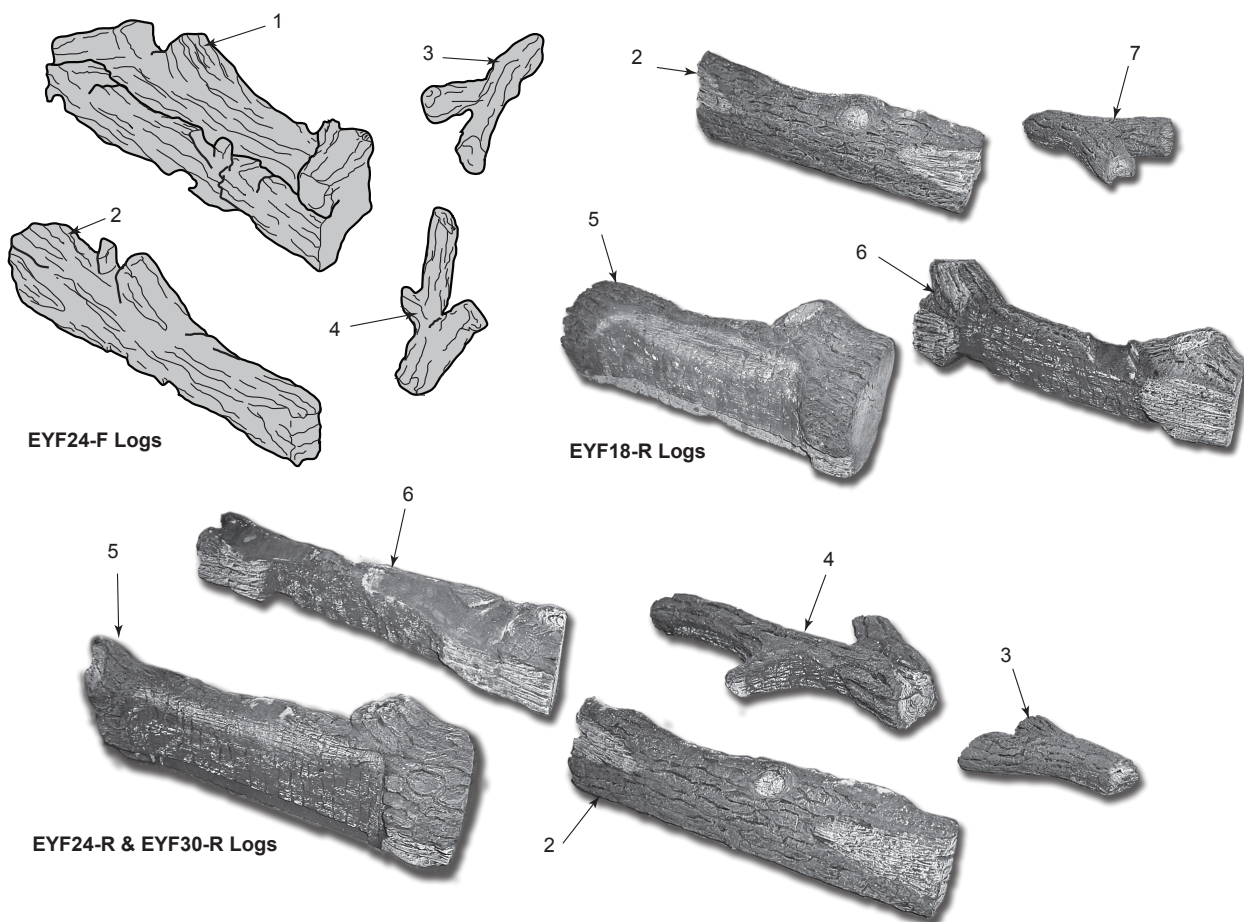


Ref.	Description	Qty.	EYF18-R	EYF24-F	EYF24-R	EYF30-R
1.	Main Log	1	--	65D0006K	--	--
2.	Front Log	1	65D1038K	65D1030K	65D1033K	65D1501K
3.	Top Left Log	1	--	65D0008K	65D1035K	65D1035K
4.	Top Right Log	1	--	65D0009K	65D1034K	65D1034K
5.	Rear Log	1	65D1036K	--	65D1031K	65D1031K
6.	Middle Log	1	65D1037K	--	65D1032K	65D1500K
7.	Top Log	1	65D1039K	--	--	--


PLACE EYF24-R and EYF30-R LOG SETS

1. Place Rear Log (#5) on rear support. Figure 1
2. Place Middle Log (#6) on middle support. Figure 2
3. Place Front Log (#2) in between burner and grate. Figure 3
4. Place Top Right Log (#4) in bottom log cutouts. Figure 4
5. Rest Top Left Log (#3) in front and middle log cutouts. Figure 4


NOTE: Logs #5, #6 and #2 have ridges on the bottom which secure the logs to burner frame. After installing each log, check to be sure it is stable.

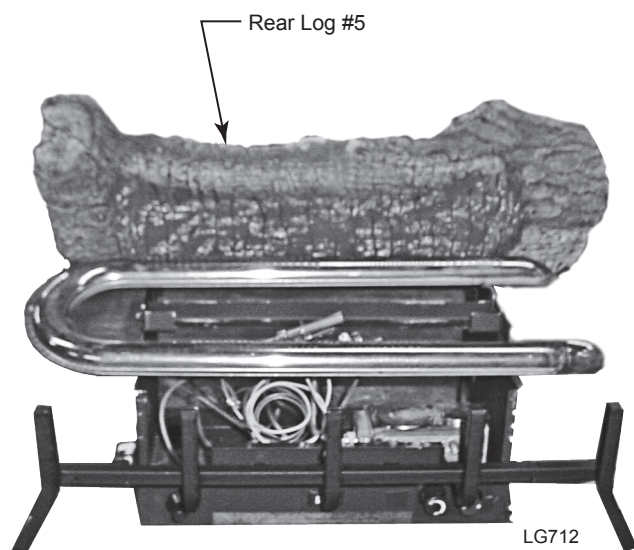


**Figure 1 -
Place Rear Log**

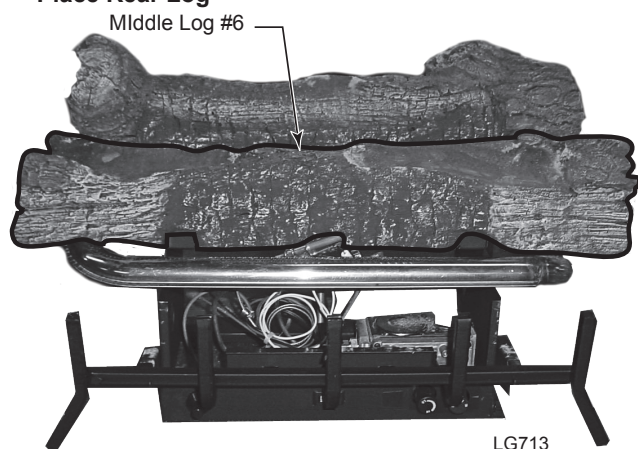

**Figure 2 -
Place Middle Log**

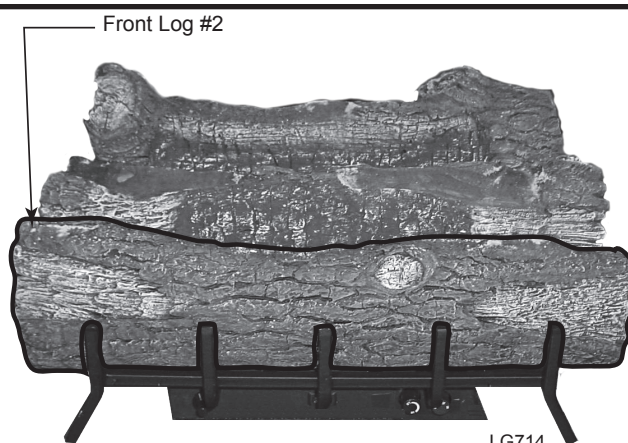

**Figure 3 -
Place Front Log**

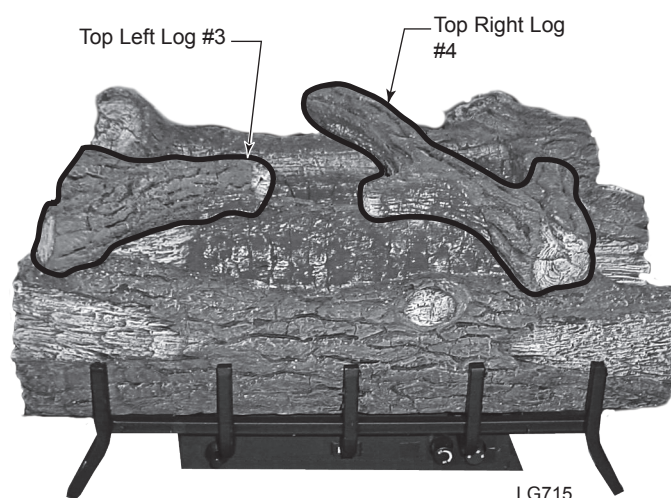

**Figure 4 -
Place Top Left and Right Logs**

PLACE THE DECORATIVE ROCK

WARNING

DO NOT sprinkle volcanic rock on the logs or around the pilot or the main burner. This may cause sooting. Only place volcanic rock on the floor of the fireplace.

During initial operation of the new heater, burning logs will give off a paper burning smell and orange flames will be present. Simply open the windows for a few hours to vent the odor.

Monessen, a brand of Hearth & Home Technologies
7571 215th Street West, Lakeville, MN 50044
www.monessenhearth.com